Projection conique conforme de Lambert. LO5 (parallèles 53 00, 65 00). LO6 (parallèles 40 30, 47 30).

FRÉQUENCES DE COMMUNICATION DANS UN ESPACE AÉRIEN DE CLASSE G

LORSQUE DES AÉRONEFS EXÉCUTENT À PROXIMITÉ D'AÉRODROMES NON CONTRÔLÉS OU DANS UN ESPACE AÉRIEN DE CLASSE G, DIFFUSER LES COMPTES RENDUS DE POSITION, LES CHANGEMENTS D'ALTITUDE, LES DÉPARTS ET LES INTENTIONS D'APPROCHE, ET RESTER À L'ÉCOUTE DES AUTRES AÉRONEFS SUR LA FRÉQUENCE 126.7 MHz. À MOINS QU'UNE AUTRE FRÉQUENCE SOIT DÉSIGNÉE POUR L'ESPACE AÉRIEN NON CONTRÔLÉ EN QUESTION.

Référez au Supplément de VI (GPH 206) pour renseignements complets sur les communications.

→ Syn Ha Nau

CENTRES DE CONTRÔLE RÉGIONAL et UNITÉ DE CONTRÔLE TERMINAL

avec stations périphériques

GANDER 126.5 132.1 269.4

MONTREAL 119.9 120.45 133.45 135.15 126.8
Bromont 126.85 134.75 134.9 269.2 269.6
Bridge 132.75
Fitzpatrick 132.75
Fort Drum 132.1
Massena 126.75 134.075
Plattsburgh 132.1
Saranac 126.85
Swanton 126.85
Watertown 126.85 132.9
Wiarton Airport 120.1 269.6
Wolfe Island 132.1
Sandy 134.9
Smithfield 132.2 312.7
Trenton 126.85
Vittoria Airport 126.85

OTTAWA TML 127.7 135.15

QUEBEC TML 127.85 134.0 322.8

CODES ABRÉGÉS et LES NUMÉROS DU RÉSEAU TÉLÉPHONIQUE PUBLIC COMMUTÉ (RTPC)

FSS Gestionnaire Border	451822 1 700-661-8290
FSS du gestionnaire Gander	451822 1 709-651-5488
Appts de Gander	451822 1 709-651-5356
FSS de Goose Bay	451822 1 709-896-3380
FSS de Moncton	451822 1 506-851-6464
FSS de Terre-Neuve	451822 1 709-772-4042
FSS de Winnipeg	451822 1 204-807-8661
FSS de Yellowknife	451822 1 867-920-8214
FSS de Vancouver	451822 1 866-397-7676

LO 5 ▸
◂ LO 5

27 NOVEMBRE 2025

27 NOVEMBRE 2025
LO 6 ▸
◂ LO 6

NAV CANADA

EN ROUTE NIVEAU INFÉRIEUR

CANADA ET ATLANTIQUE NORD

AIP Canada (CAP)
AIP Canada (CAP)
Le Ministère de la Défense nationale FLIP GPH 206

Pour utilisation jusqu'à 18,000' ASL (ou moins/environs dans l'espace aérien inférieur du Canada et/ou conformément aux procédures régionales). Les cartes ne sont pas destinées à la navigation. NAV CANADA accepte la responsabilité d'assurer des services de contrôle de la circulation aérienne.

Avertissement: Prière de vous référer aux cartes et aux publications d'information de vol actuelles des États-Unis pour les renseignements sur l'espace aérien des États-Unis.

EN VIGUEUR 0901Z

27 NOVEMBRE 2025
JUSQU'À 0901Z 22 JANVIER 2026

ATTENTION
Le contenu de la présente publication est susceptible de modification par NOTAM ou Supplément d'AIP

DONNÉES RÉVISÉES

LO 5 – Aviat chargement.

LO 6 – AO Oshawa Executive Airport change.

Publié par NAV CANADA et visés des Annexes 4 et 15 de la Convention relative à l'aviation civile internationale (OACI).
Corrigendum et impression 0100Z/6 NAV CANADA
Source des données aéronautiques civiles canadiennes: NAV CANADA et Transports Canada
Sources des données aéronautiques militaires canadiennes: Ministère de la Défense nationale
Air Navigation in the Service of Canada

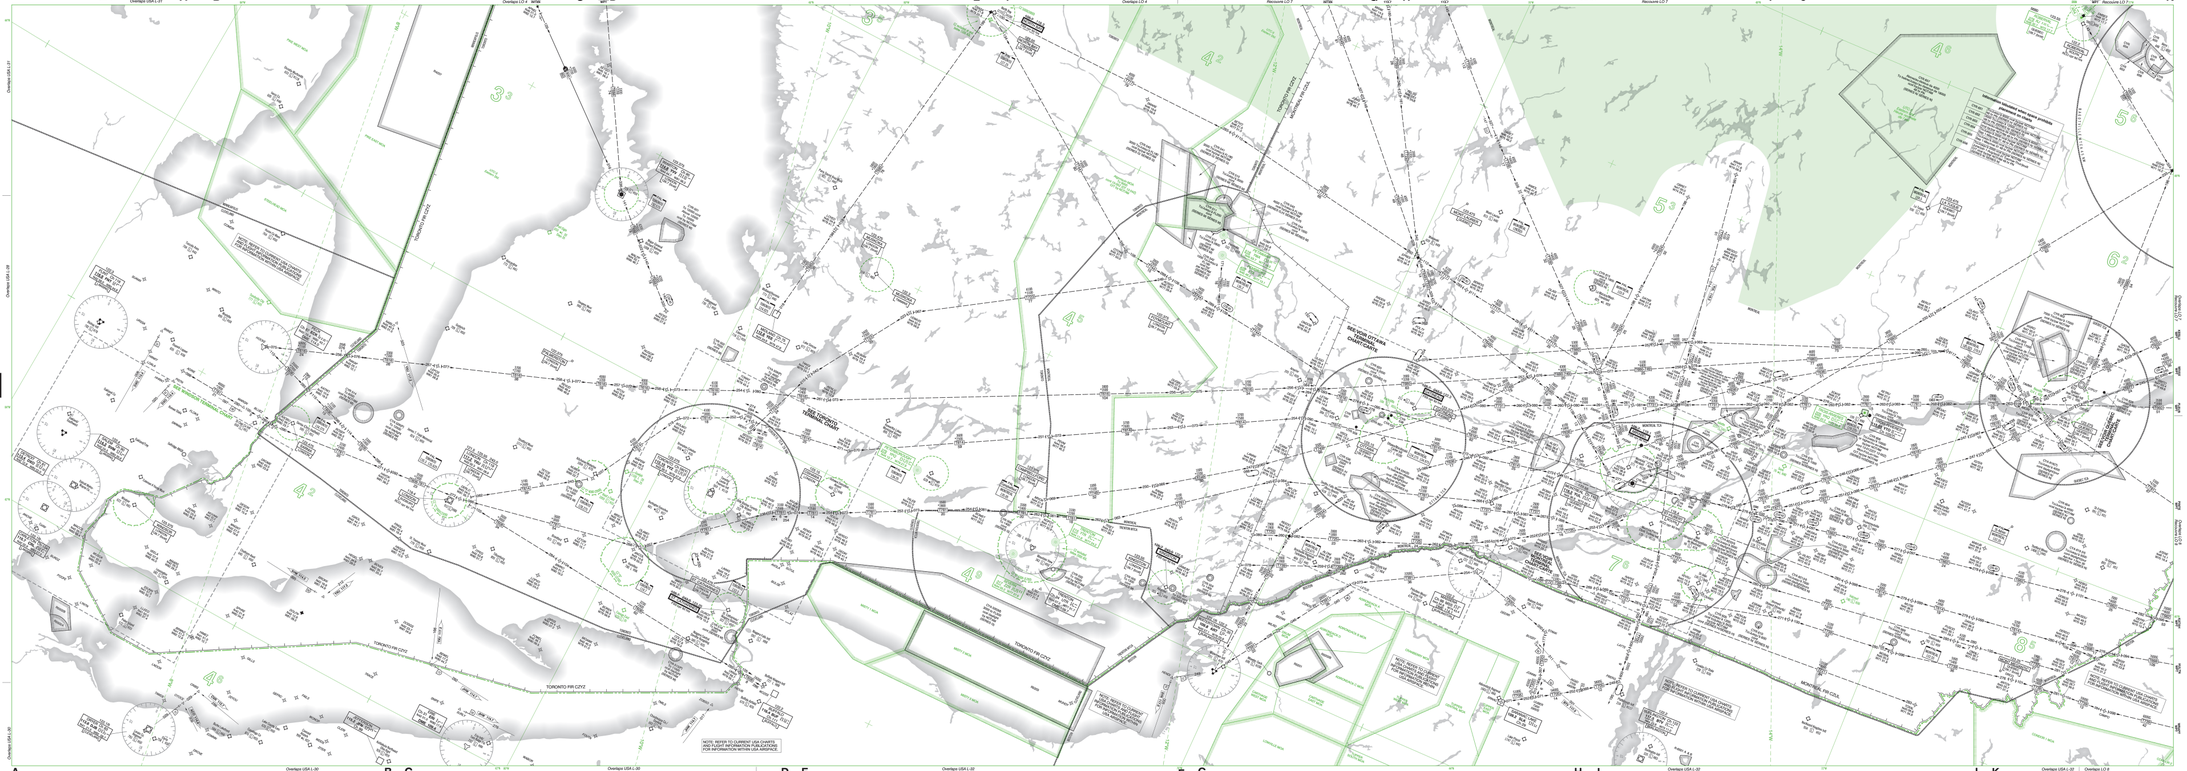

LEGEND

AERODROMES

AERODROME DATA ‘RE’ ATTN!

- Elevation given in feet above sea level
- Runway lighting available.
- ATF/SL
- Call-to-Lt (UPL see CFS
- Hard surface runway
- Length of longest landing distance available (LDA) in hundreds of feet. (If not followed by ‘H’ or ‘W’, LDA is shown as 0.)
- Water aerodrome does not exist.

RADIO AIDS TO NAVIGATION AND COMMUNICATION BOXES

RADIO AIDS TO NAVIGATION

Radio/Navigation Facilities not operated by NAV CANADA are identified by a ‘(U)’ suffix.

VHF/UHF Aids are displayed in BLACK. LF/MF Aids are displayed in GREEN.

COMPASS ROSE
Magnetic North. Magnetic Variation. Compass Rose is oriented to Magnetic North. Variation is indicated as of 1st of 3rd year of the current 5 year cycle.

VOR VOR/DME VORTAC TACAN

Symbols may be displayed for sake of clarity. Stations may not have all services indicated.

DME
LF/MF NDB

RADIO AIDS TO NAVIGATION DATA BOXES

- VOR/DME VOR/TAC (CZYZ) 113.7 YHZ (CZUL) 115.9 MLT (CZMT) 113.6 YUL
- VOR/TAC (CZUL) 108.6 YHZ (CZYZ) 112.9 YUL
- NDB (CZUL) EN 62 (CZMT) 1.7 MLT (CZUL) 1.5 L
- VOR/DME (CZUL) 108.75 YUL (CZYZ) 112.7 YHZ
- LF/MF aids
- Frequency indicates Aeronautical Information Service
- Ident
- Class of aid

VOR/DME VOR/TAC (CZYZ) 113.7 YHZ (CZUL) 115.9 MLT (CZMT) 113.6 YUL

NDB (CZUL) EN 62 (CZMT) 1.7 MLT (CZUL) 1.5 L

VOR/DME (CZUL) 108.75 YUL (CZYZ) 112.7 YHZ

LF/MF aids

Frequency indicates Aeronautical Information Service

Ident

Class of aid

Unmonitored LF/MF aids must be tuned by pilot

Unmonitored VOR/TAC must be tuned by pilot

LF/MF aids

Frequency indicates Aeronautical Information Service

Ident

Class of aid

Unmonitored LF/MF aids must be tuned by pilot

RADIO COMMUNICATION

- 123.35 THIRD LINE MOR without frequency and not monitored by FSS. Hours indicate when FSS operates to receive reports.
- 122.2R(A) Broadcast by aerodrome operator. FSS Hours.

Duplicate or unscheduled broadcasts are in ITALICS.

AIRSPACE AND ROUTE INFORMATION

AIRWAYS AND ROUTES

VHF/UHF data is displayed in BLACK. LF/MF data is displayed in GREEN.

Airways are established on routes based on LF/MF facilities and are normally 8 nm wide. Airways based on VOR/TAC facilities are 10 nm wide. Jet airways are displayed in green.

- VHF/UHF airway centre line and identification
- LF/MF airway centre line and identification
- Unconstrained low route and identification
- Unconstrained high route and identification
- Commonly used tracks or transition routes
- Direct routes
- Direct routes are fixed tracks

Reference bearings and points are given in respect to aeronautical facilities. Bearings are magnetic and are given from the facility to the point. Magnetic is the basis for all bearings, radials and courses.

- Radial from a VHF/UHF facility and bearing from a LF/MF facility
- Southern Domestic LF/MF outbound track and distance from a LF/MF facility. Southern Domestic LF/MF outbound bearings are controlled at 5° intervals. Distances are in nautical miles.
- Pacific Oceanic point with radials from a VOR/TAC facility for the formation of an intersection or reporting point
- Pacific Oceanic point with bearings from a VOR/TAC facility for the formation of an intersection or reporting point
- Mileage breakdown
- Denotes DME fix
- Mileage breakdown for multi-mileage segment
- Encircled mileage shown when necessary for clarity
- Offset mileage between two points when mileage is not measured along the airway or between intersecting airways
- MEA (Minimum Enroute Altitude)
- MOCA (Minimum Obstacle Clearance Altitude)
- MEA (Minimum Enroute Altitude) with same as MEA, MOCA or MRA (Minimum Reception Altitude) applicable in both directions
- Change in MEA or MOCA at an intermediate fix (arrow indicates direction of change)
- Changeover point with mileage between navigation aids
- MEA (Minimum Enroute Altitude)
- U.S.A. (including ALASKA)
- MCA (Minimum Crossing Altitude)
- MRA (Minimum Reception Altitude)
- MAA (Maximum Authorized Altitude)

MEA MOCA MRA MAA

AIRSPACE

- Controlled airspace above 12500 AGL in Canada
- Area Minimum Altitude
- Class G airspace
- Shaded areas (green) indicate uncontrolled airspace.

CRUISING ALTITUDES - CANADA

CRUISING ALTITUDES - U.S.A.

IFR ALTITUDES AT 4,000 FEET AGL AND ABOVE (or as published) are available at 2,000-foot intervals above the minimum altitude.

For additional information, see Canada Flight Supplement.

Revu Gatineau