

STANDARD DEPARTURE CHART-INSTRUMENT

ZBAA BEIJING/Capital

RNAV

VAR6° W

RWY36L/36R/01(REN0B)

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS
AND HEIGHTS IN METERS DME DISTANCES IN
NAUTICAL MILES DISTANCES IN KM

D-ATIS(DEP) 128.65

TWR01 124.3(118.3) 18R/36L
TWR02 118.5(118.05) 18L/36R
TWR03 118.6(118.3) 01/19


APP05 127.75(126.5)
APP06 121.1(126.5)
APP07 124.4(124.7)

TL 3600
TA 3000
3300(QNH ≥1031hPa)
2700(QNH ≤979hPa)


1. RADAR REQUIRED

2. RNAV 1

3. GNSS,DME/DME/IRU REQUIRED

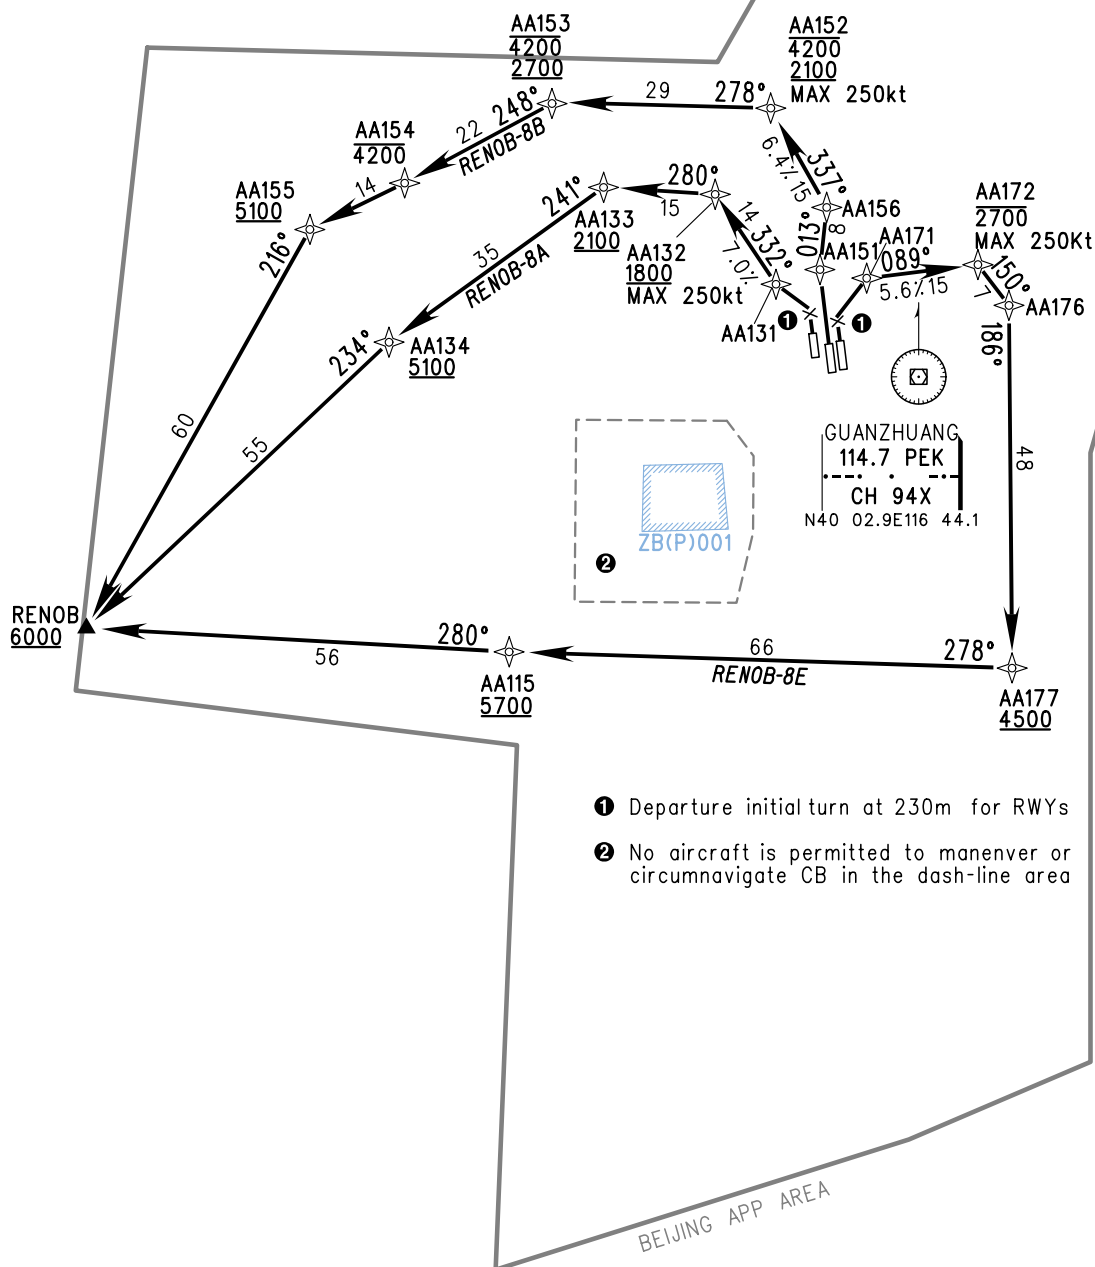

- ① Departure initial turn at 230m for RWYs
- ② No aircraft is permitted to maneuver or circumnavigate CB in the dash-line area



Changes: TWR FREQ.