



D-ATIS 126.2
TWR 118.5(124.35)
GND 121.65

ZBLA HULUNBEIER/Hailar
N49°12.3'E119°49.6' ELEV 660m

AERODROME CHART

RWY	Direction	Bearing strength(PCN)	
09	093°	APRON 1, TWY 1:	34/R/B/W/T
		TWY C(north):	61/R/B/W/T
27	273°	TWY B:	65/R/B/W/T
		RWY, TWY C(south):	70/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

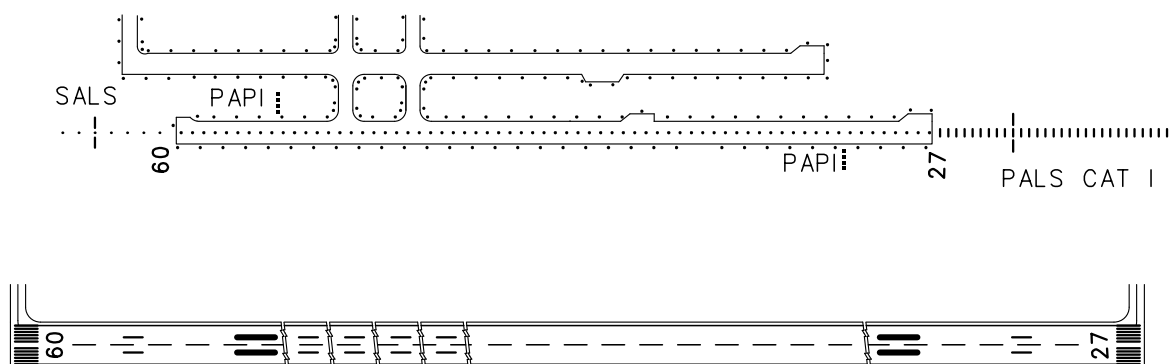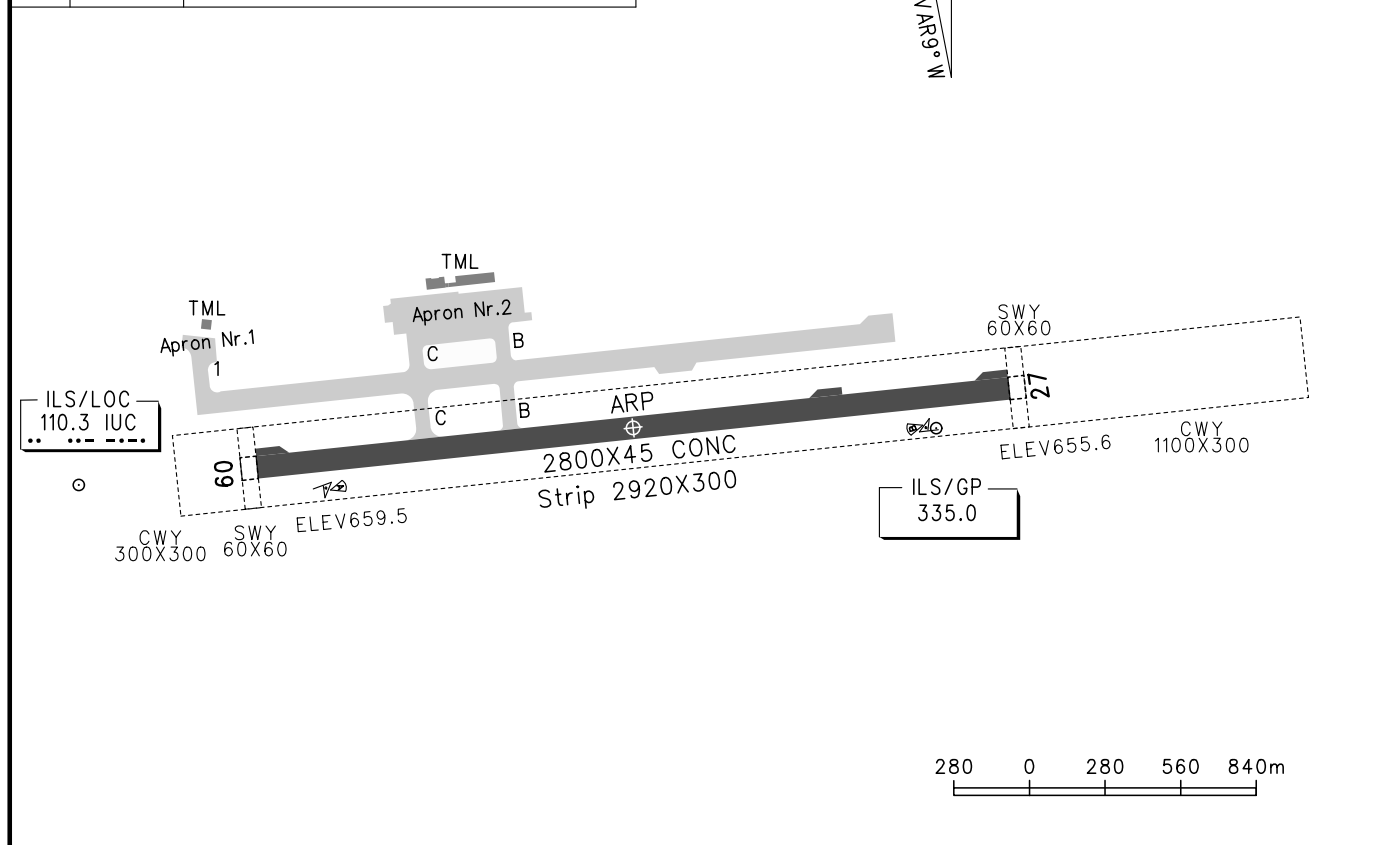

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY09		RWY27		RWY09	RWY27
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A					SALS PAPI REDL RCLL	PALS CAT I PAPI REDL RCLL
	B	RVR400	RVR500	RVR400	RVR500		
	C	VIS800	VIS800	VIS800	VIS800		
	D						
Other 1&2 ENG							
Note: VIS1600m for single engine							
Changes: Take-off minima.							