

AERODROME CHART

ATIS 126.25
TWR 130.35(118.35)
GND 121.75



ZGNN NANNING/Wuxu
N22° 36.6'E108° 10.4' ELEV 128m

RWY	Direction	Bearing strength(PCN)		BEARINGS ARE MAGNETIC ALTITUDES, DISTANCES, ELEVATIONS AND HEIGHTS IN METERS
05	048°	RWY, A1, N, W	87/R/B/X/T	
		TWY B6, C3-C8, C10(W of center line of TWY D), B, B3, B9, C, D, K, R, TWY A(north of A6), TWY J5:	87/R/B/W/T 84/R/B/X/T	
23	228°	TWY A2, A4, A6, Q(east of A):	80/R/B/X/T	
		TWY A(south of A6):	76/F/B/W/T	
		TWY J6,	75/R/B/W/T	
		TWY B4,B8,J7: TWY Q(west of A), J4:	73/R/B/W/T 60/R/B/X/T	



Note:

- HS1-HS4 are Hot Spots, refer AD2.20 item 2.8 for hot spot procedure.
- X: U/S

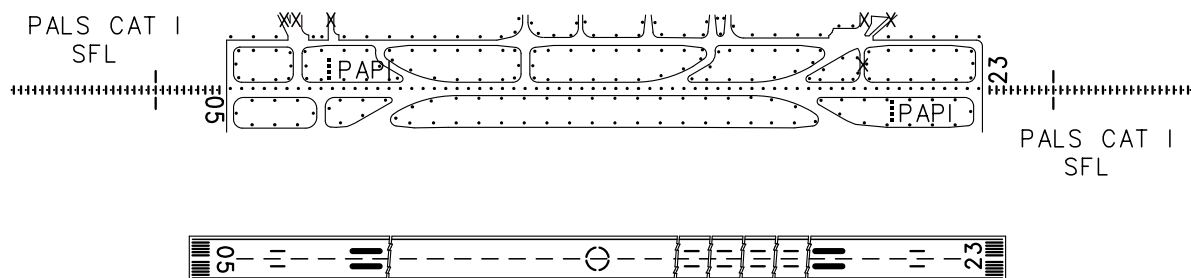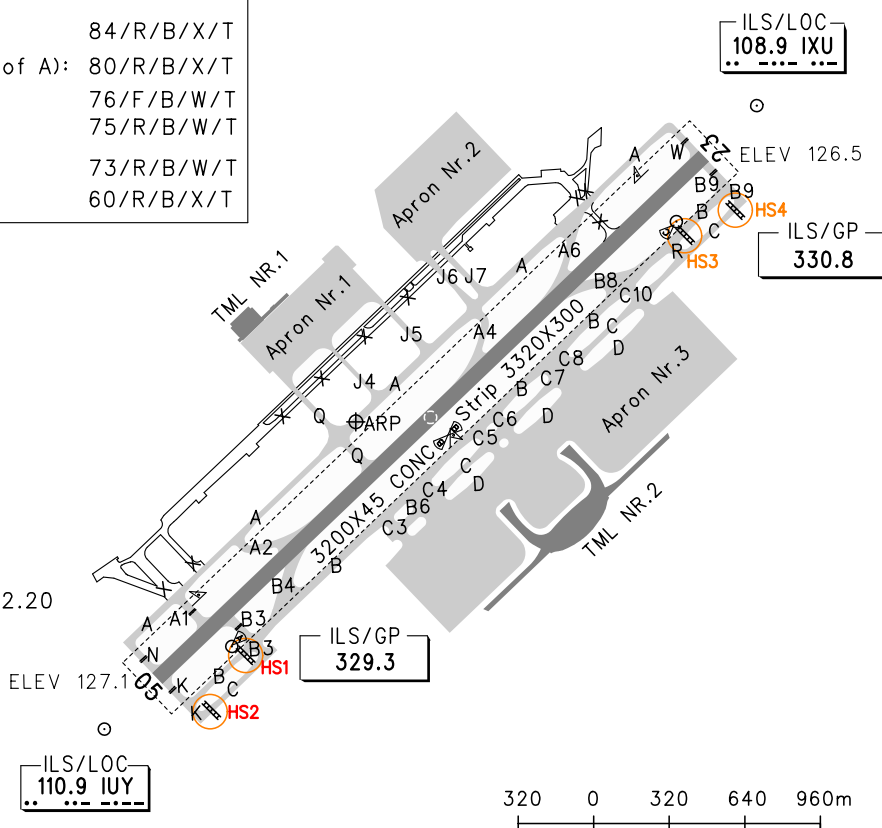

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY05	RWY23
05/ 23	2 TURB ENG or 3&4 ENG	RVR400 VIS800	RVR500 VIS800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	Other	VIS1600			

Changes: Hot spots numbers.