


INSTRUMENT
APPROACH
CHART-ICAO


VAR1.7° W AERODROME ELEV 128 THR RWY23 ELEV 126.5

ATIS 126.25
APP01 121.25(119.85)
APP02 119.075(119.85)
TWR 130.35(118.35)

ZGNN NANNING/Wuxu
ILS/DME y RWY23

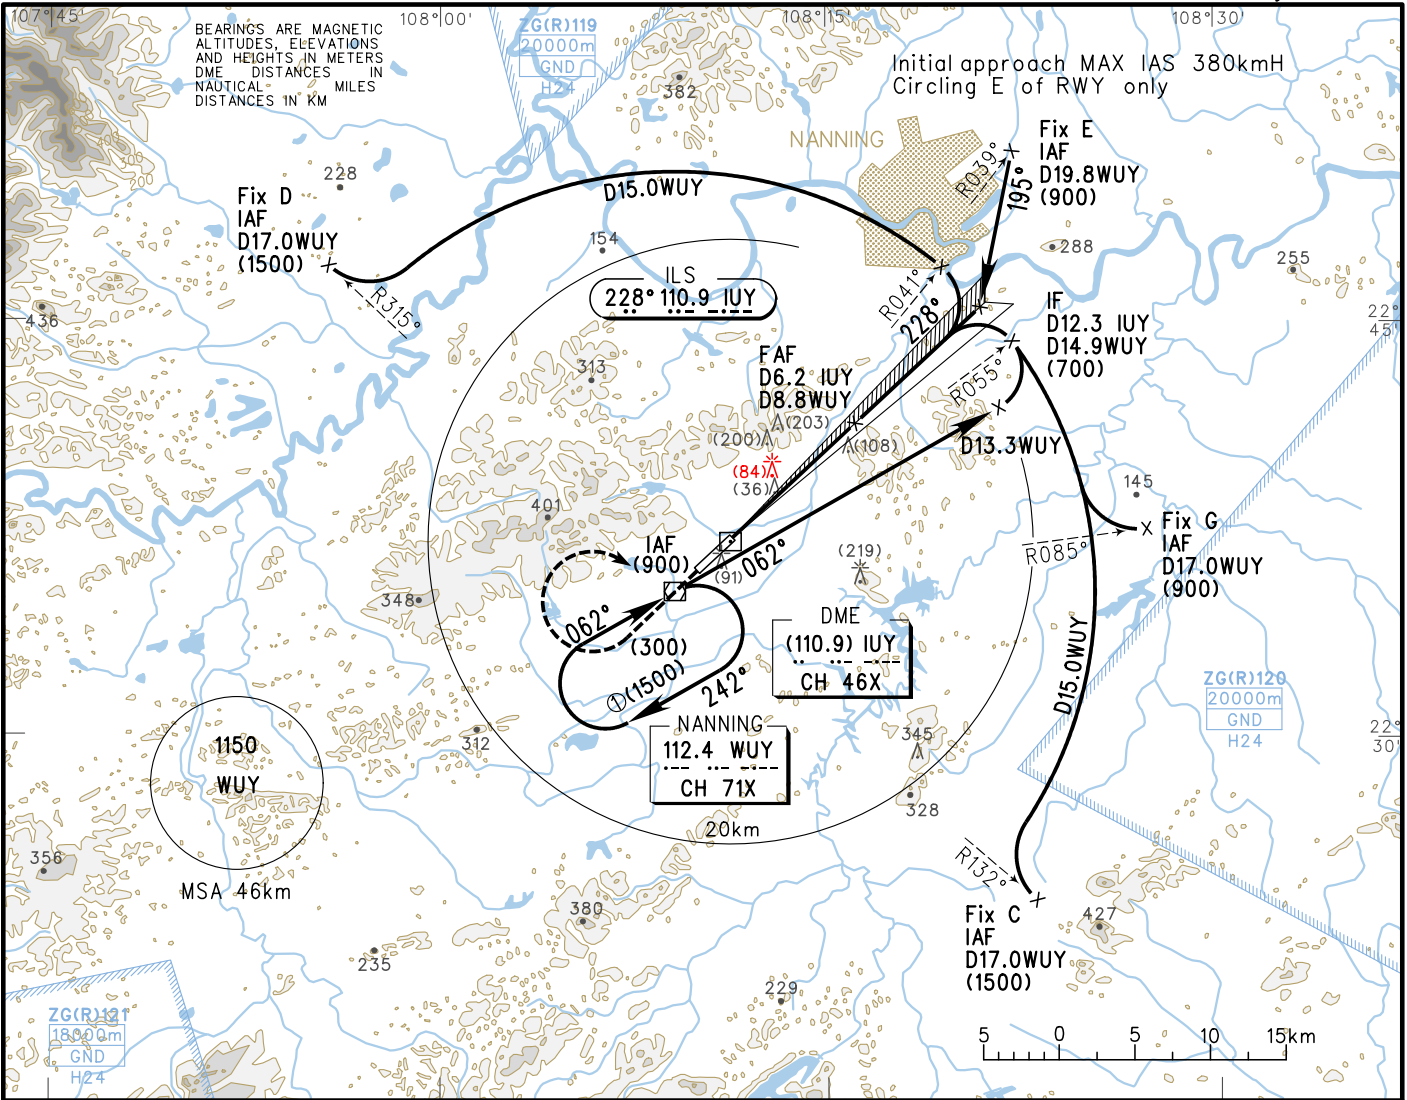

GP INOP	DME (IUUY) (NM)	1	2	3	4	5	6	7
	HGT (m)		(196)	(293)	(390)	(486)	(583)	

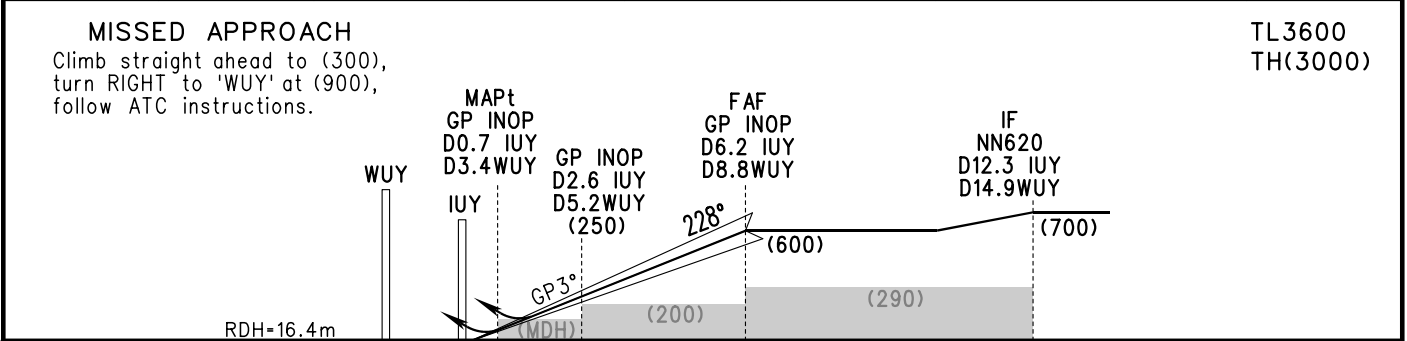

-5.2 0 1.05 4.5 11.1 22.4km												
	A	B	C	D	FAF-MAPt(GP INOP) 10.05km							
ILS/DME ^(DH) RVR/VIS ^{HUD}	(60) 550/800				GS in	kt kmH	80 150	100 185	120 220	140 260	160 295	180 335
					Time	min:sec	4:04	3:15	2:43	2:20	2:02	1:49
					Rate of descent	m/s	2.2	2.7	3.2	3.8	4.3	4.9
GP INOP	(115) 1300											
CIRCLING	(185) 2100		(320) 4400	(355) 5000	HUD SA CAT I: (DH)(45),(RA)(51),RVR450 Changes: New OBST.							