

STANDARD ARRIVAL CHART-INSTRUMENT

VAR4° W

ATIS 128.45
APP01 120.275(124.2)
APP02 126.35(124.2)
TWR(12R/30L) 118.3(118.85)
TWR(12L/30R) 118.075(118.85)

ZHCC ZHENGZHOU/Xinzheng

RNAV RWY12L/12R

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


TL 3600
TA 3000
3300(QNH ≥1031hPa)
2700(QNH ≤979hPa)

1. RNAV 1
2. GNSS REQUIRED
3. RADAR REQUIRED



NOT TO SCALE

Holding MAX IAS 380kmH

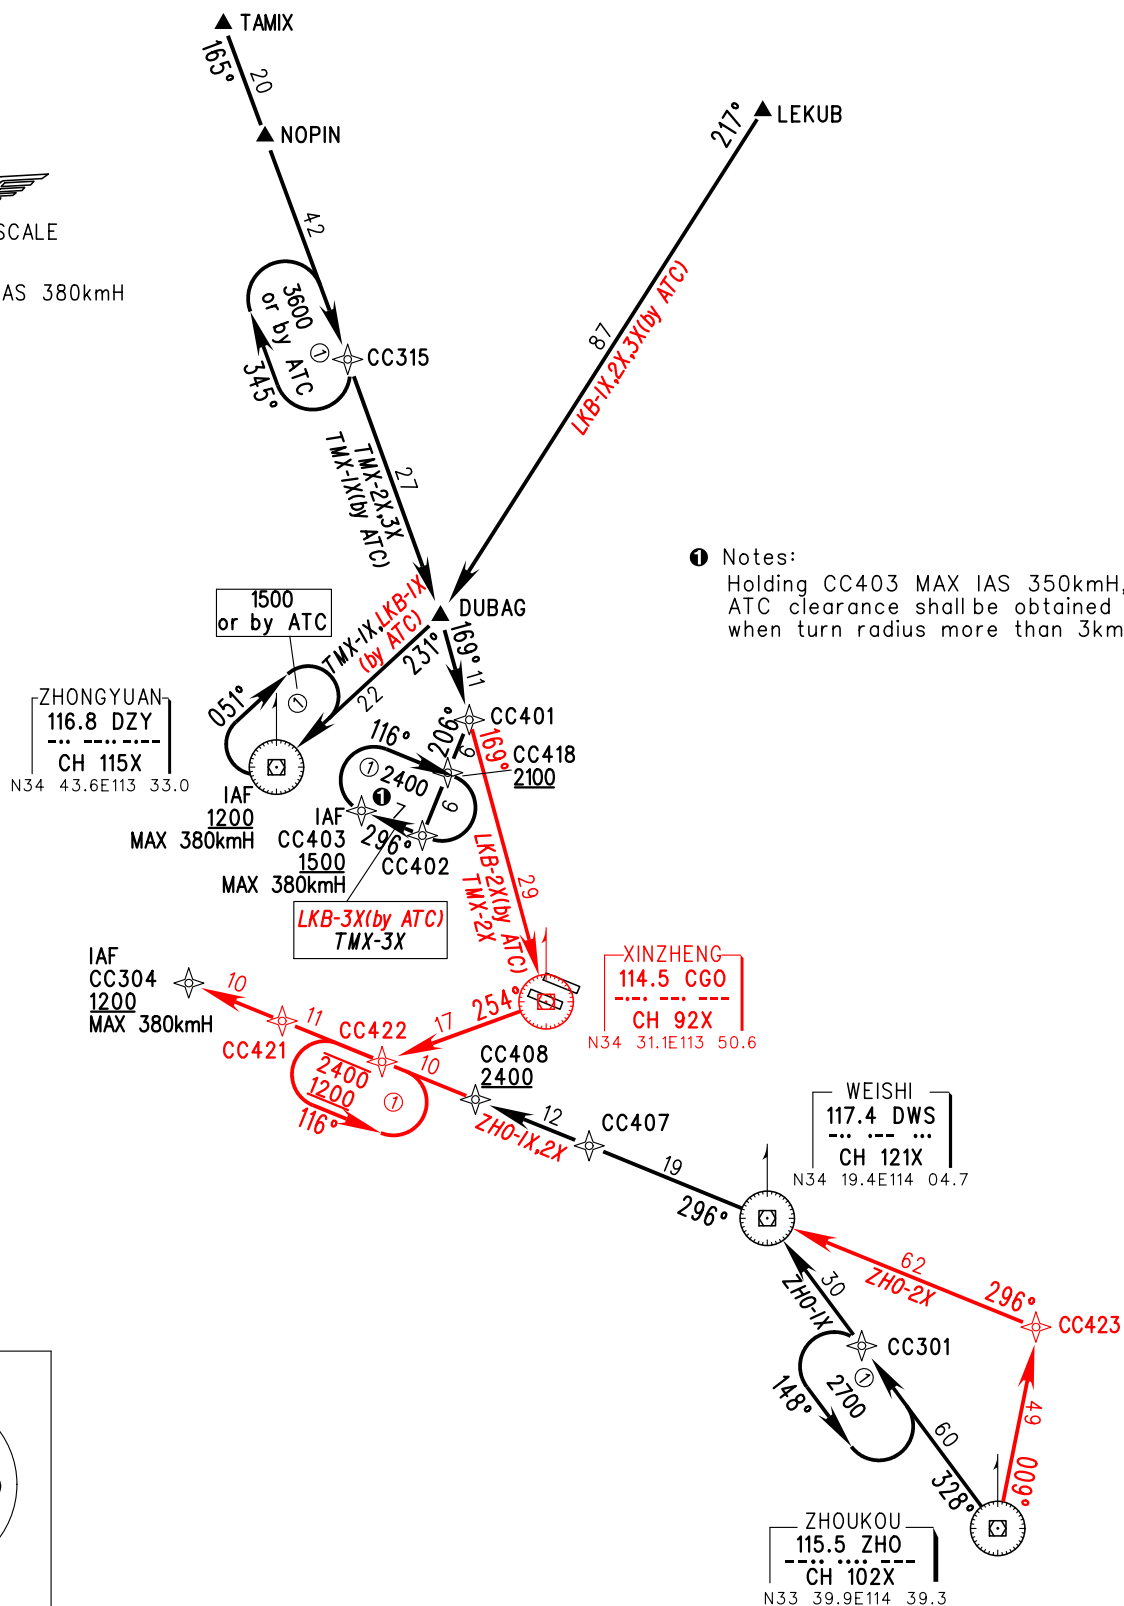

- Notes:
- Holding CC403 MAX IAS 350kmH, ATC clearance shall be obtained when turn radius more than 3km.

Changes: ZHO-2X added, WXI-IX, 2X, 3X(by ATC) changed to LKB-IX, 2X, 3X(by ATC).