

STANDARD DEPARTURE CHART-INSTRUMENT

ZSSS SHANGHAI/Hongqiao

RNAV RWY18L/18R
(NXD, PIKAS, SASAN)

VAR5.8° W

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. GNSS, DME/DME/IRU REQUIRED

D-ATIS 132.25


TWR 118.1(124.3)(E)
118.65(118.25)(W)

APP 120.3(119.75)	AP01	126.3(120.65)	AP06
125.4(124.05)	AP02	121.1(119.75)	AP07
125.85(119.20)	AP03	127.75(124.05)	AP08
123.8(119.20)	AP04	121.375(128.05)	AP09
126.65(128.05)	AP05	125.625(120.65)	AP10
		119.075(128.05)	AP11

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



Note:
1. Departure turning before DER is forbidden.
2. Climb gradient ≥ 4.5% for SAS-1X and PIK-1X
when ALT of SS083 required 2700.

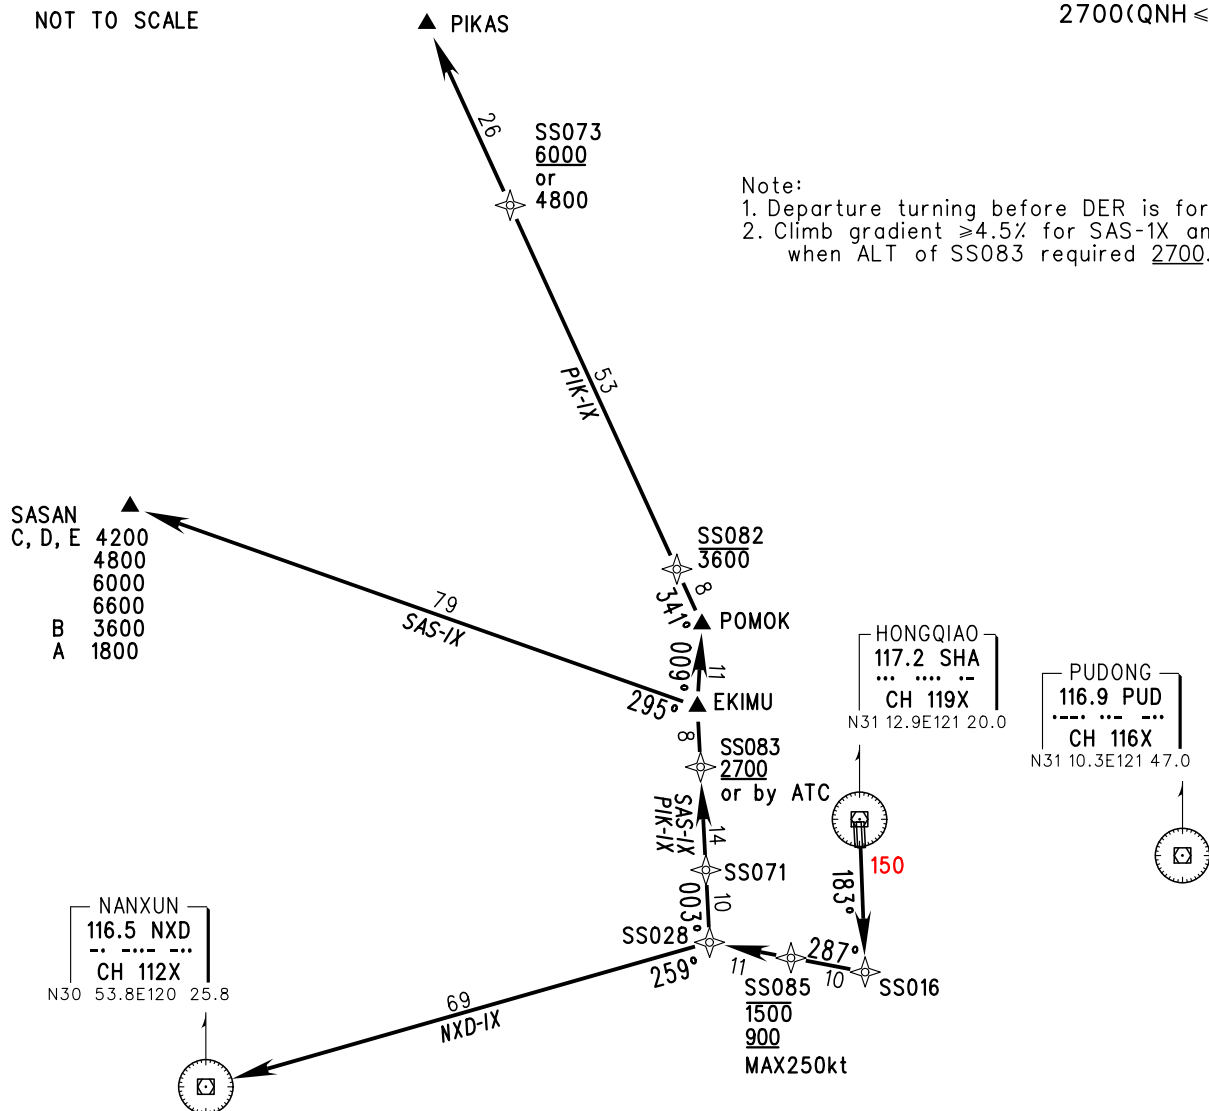

Changes: Altitude