AERODROME CHART

ATIS 126.45
TWR 118.45(118.1)
GND 121.6

ZSYT YANTAI/Penglai

N37°39.7'E120°58.7' ELEV 47m

RWY	Direction	Bearing strength(PCN)
05	050°	RWY, TWY(others), Stands Nr.103-115, 201-209, 203A, 301-319: PCN 80/R/B/W/T
23	230°	TWY A1-A4, Stands Nr.101-102, 116-119: PCN 64/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

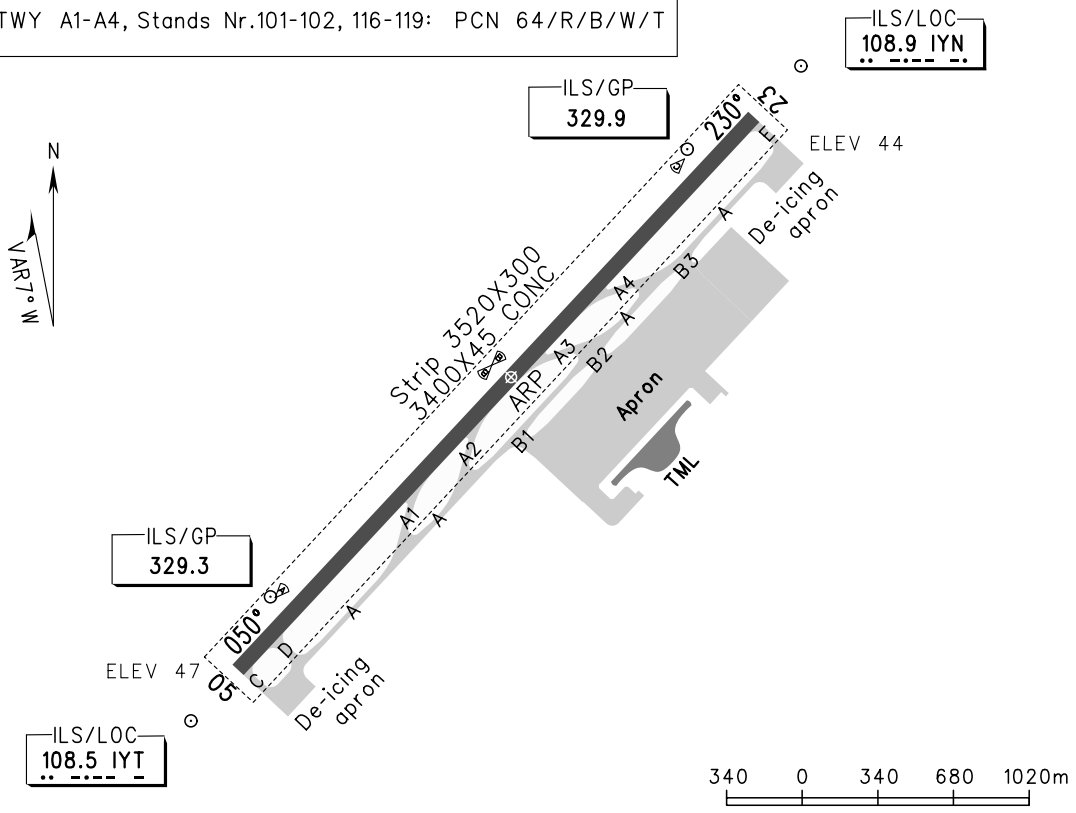

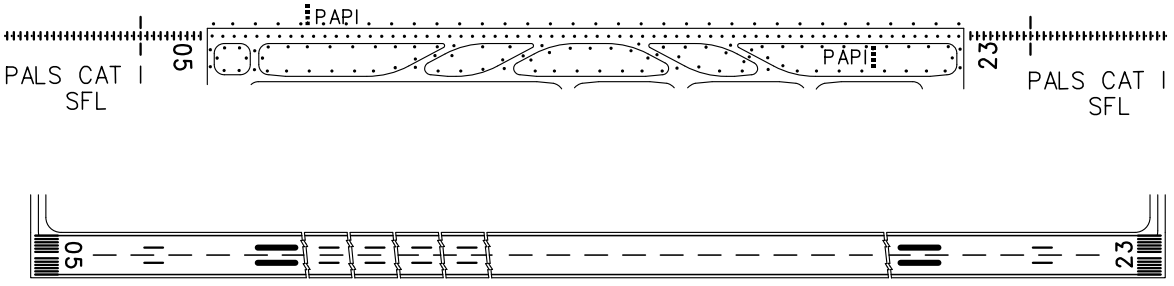

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
ACFT Type	RWY05/23		LVP in force, RWY05/23	RWY05	RWY23
	REDL	NIL(Day only)	REDL, RCLL, RENL		
2 TURB ENG or 3&4 ENG A, B, C, D	RVR 400 VIS 800	RVR 500 VIS 800	HUD RVR 150	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
Other 1&2 ENG					

Note:Take-off minima of RWY23 is ceiling (290)m, VIS 5000m, if climb gradient is less than 3.7%

Changes: Take-off minima.