

ATIS 127.05
TWR 118.3(118.05)
GND 121.6(121.65)
DELIVERY 121.8(121.65)

ZUGY GUIYANG/Longdongbao

N26°32.2'E106°48.0' ELEV 1139m



AERODROME CHART

RWY	Direction	Bearing strength (PCN)	
01	011°	TWYs B, B1-B6:	PCN 70/R/B/W/T
		TWYs A3, A5, A6, A8:	PCN 69/R/B/W/T
		RWY:	PCN 68/R/B/W/T
		TWY A:	PCN 67/R/B/W/T
19	191°	TWYs A1, A4:	PCN 65/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

Note:
The centerline lights of TWY A3(BTN TWY B4 and TWY A)
are U/S. Aircraft using TWY A3 shall pay attention to
the centerline markings.

320 0 320 640 960m

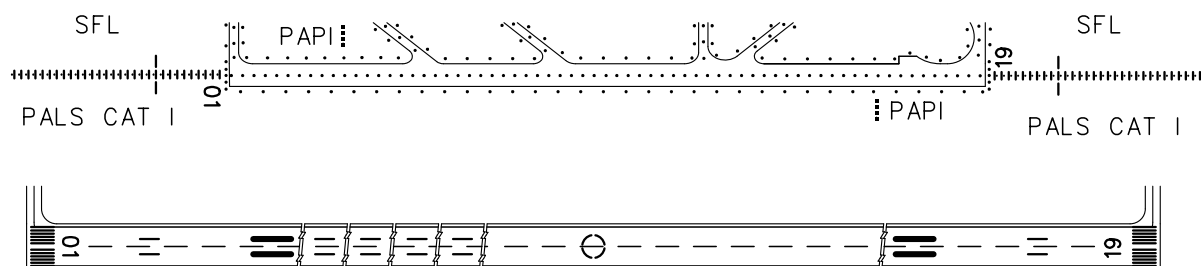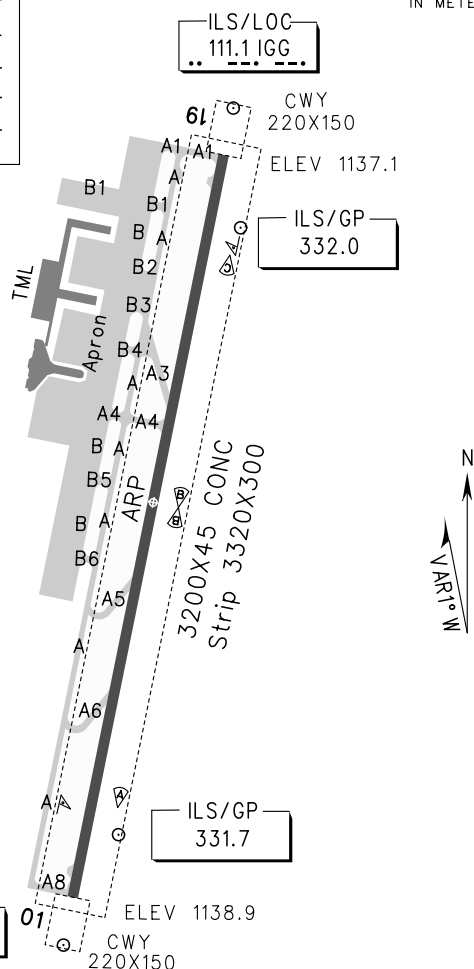

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY01/19		RWY01/19 LVP in force		RWY01	RWY19
		REDL	NIL(Day only)	REDL RCLL			
2 TURB ENG or 3&4 ENG	A	RVR400	RVR500	HUD RVR200		PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							
Changes: Note.							