

STANDARD DEPARTURE CHART-INSTRUMENT

ZUUU CHENGDU/Shuangliu

VAR1.7° W

RNAV RWY20L(OGOMO/ZYG)

BEARINGS ARE MAGNETIC,ALTITUDES,
ELEVATIONS AND HEIGHTS IN METERS,
DME DISTANCES IN NAUTICAL MILES,
DISTANCES IN KM.

GNSS, DME/DME/IRU,
RNAV1, RADAR required

D-ATIS 128.6
TWR 130.35(118.85)

APP01 124.85(127.7)
APP02 119.7(127.7)
APP03 119.25(127.7)
APP04 124.75(125.25)
APP05 119.425(125.25)

TL 3600
TA 3000
3300(QNH≥1031hPa)
2700(QNH≤979hPa)

GNSS, RNP1


N



NOT TO SCALE

Note:

- 1.Departure turn MAX IAS205kt.
- 2.Under radar control service, actual flight ALT by ATC.
- 3.Turning is forbidden until DER.

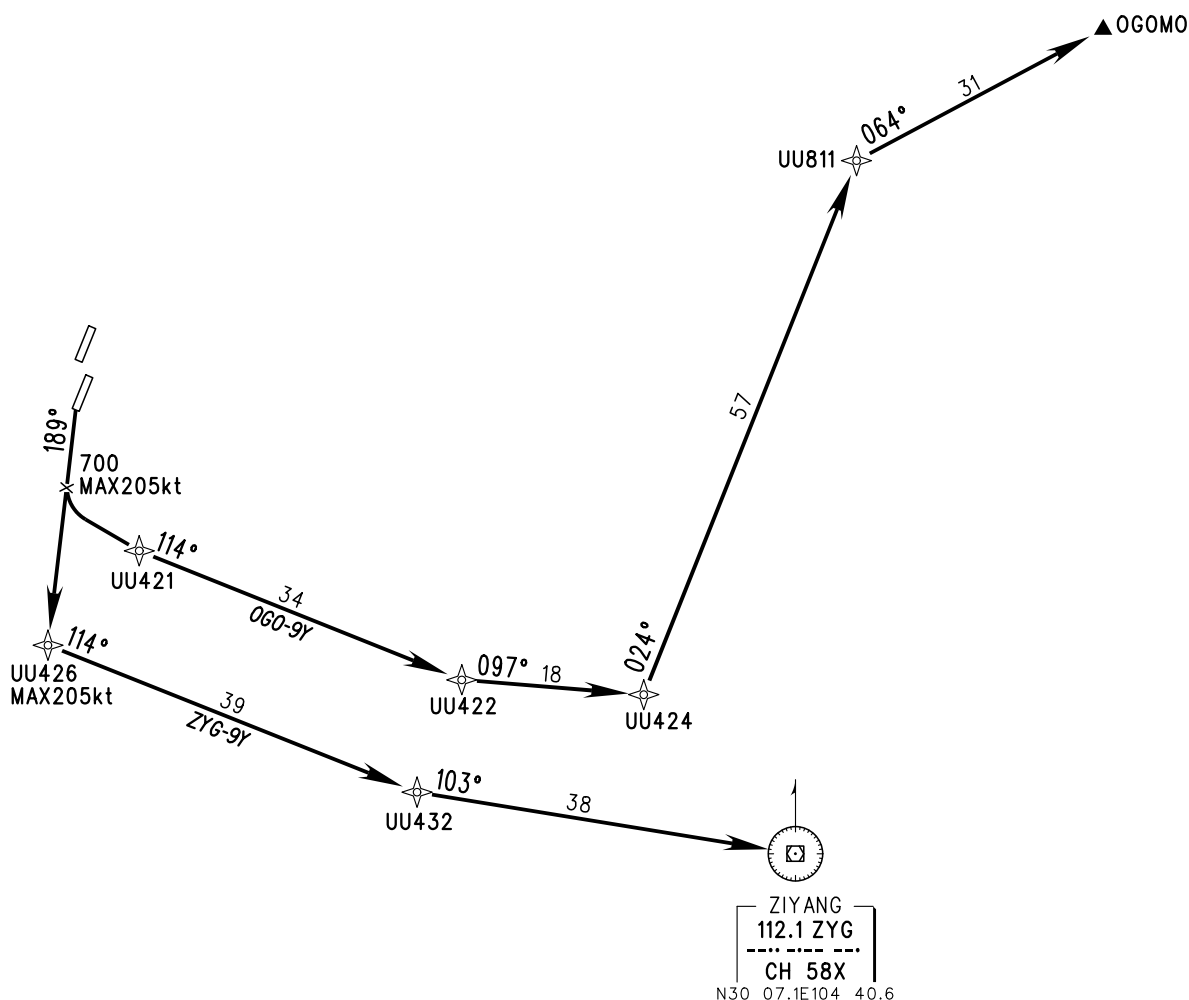

Changes: New chart.