

STANDARD DEPARTURE CHART-INSTRUMENT

VAR3° E

D-ATIS 126.7
TWR 118.1(125.0)


ZWWW URUMQI/Diwopu
RNAV(VARMI/KEXAB)

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

APP01 120.25(119.9)
APP02 126.05(119.9)
APP03 123.8(119.9)
APP04 127.9(119.9)


1. RNAV 1
2. GNSS REQUIRED
3. RADAR REQUIRED

TL 3600
TA 3000
3300(QNH≥1031hPa)
2700(QNH≤979hPa)

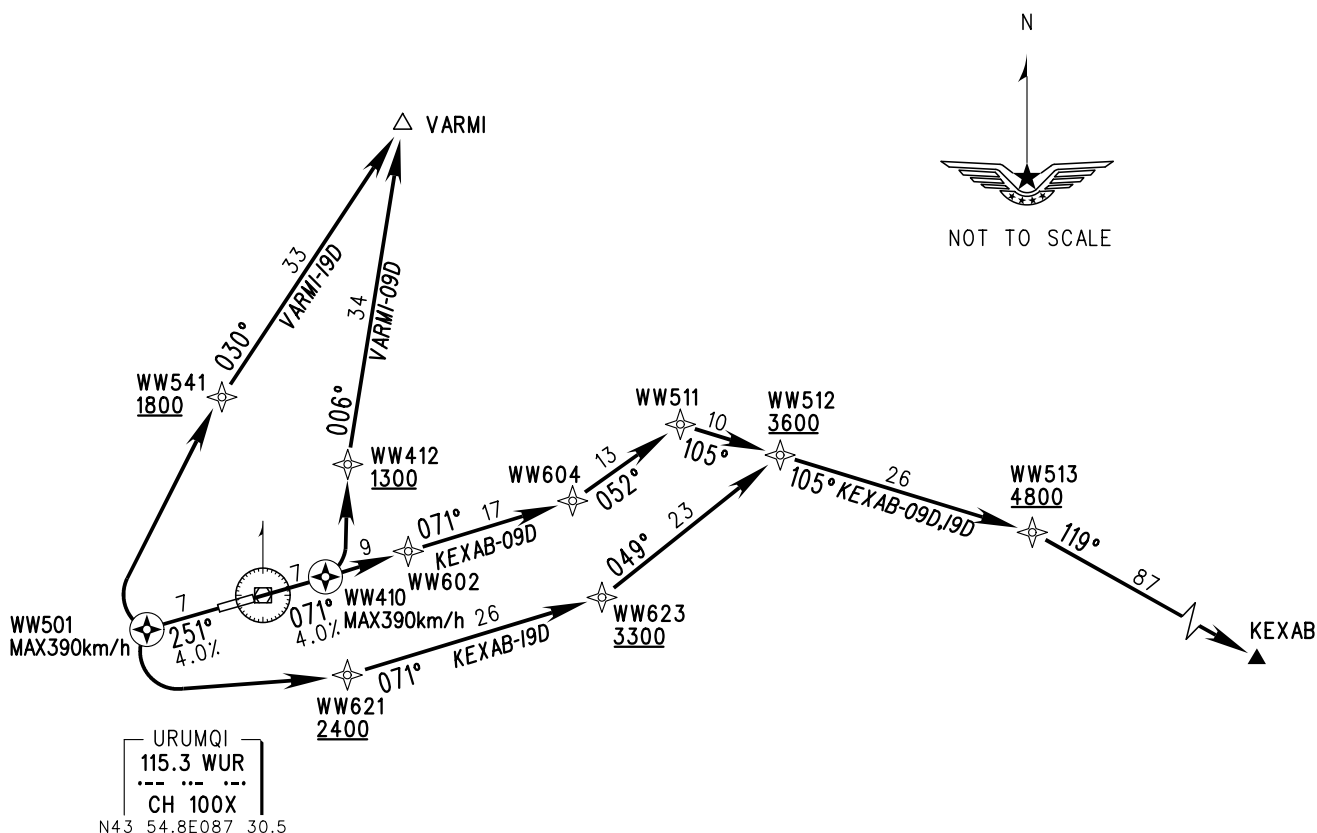

Notes:

1. KEXAB-09D: Climb straight ahead to WW410 with climb gradient 4.0% or above, then climb to enroute ALT with climb gradient 5.2% or above.
2. KEXAB-19D: Climb straight ahead to WW501 with climb gradient 4.0% or above, then climb to enroute ALT with climb gradient 5.2% or above.
3. Under radar control service, actual flight ALT instructed by ATC.



Changes: Nil.