STANDARD DEPARTURE CHART-INSTRUMENT

VAR3°E

D-ATIS 126.7
TWR 118.1(125.0)

ZWWW URUMQI/Diwopu
(BY ATC)RNAV RWY25(VARMI)

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS AND HEIGHTS IN METERS
DME DISTANCES IN NAUTICAL MILES
DISTANCES IN KM

APP01 120.25(119.9)
APP02 126.05(119.9)
APP03 123.8(119.9)
APP04 127.9(119.9)

1. RNAV 1
2. GNSS REQUIRED
3. RADAR REQUIRED

TL 3600
TA 3000
3300(QNH≥1031hPa)
2700(QNH≤979hPa)

NOT TO SCALE

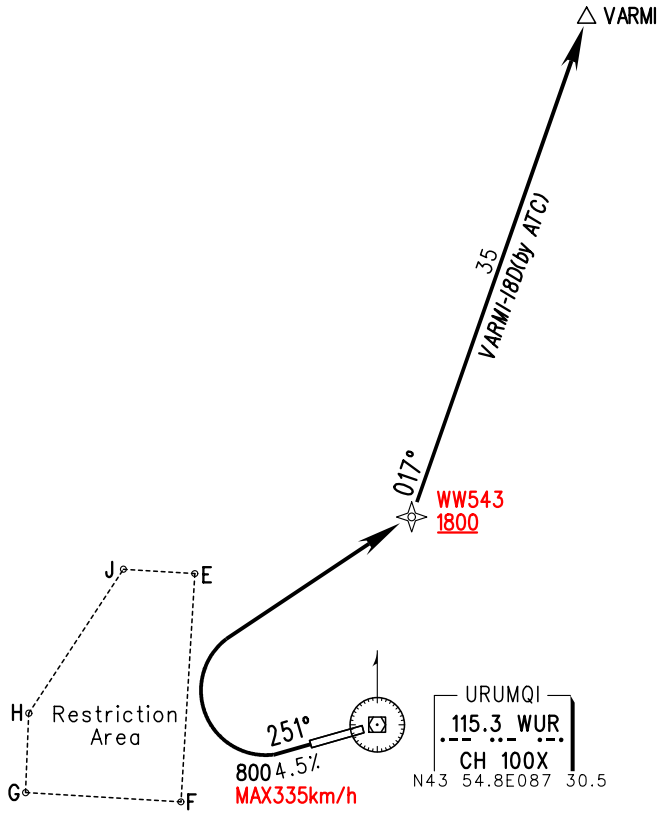

Notes:
1. Under radar control service, actual flight ALT instructed by ATC.
2. When the restriction area within E-F-G-H-J active, aircraft flying into the area is forbidden.
3. Restriction time followed by ATC.
4. E:N44 00 17 E087 21 28, F:N43 52 08 E087 20 44, G:N43 52 29 E087 13 04, H:N43 55 19 E087 13 14, J:N44 00 27 E087 17 56.



MSA 46km

Changes: Speed limit.