

STANDARD DEPARTURE CHART-INSTRUMENT

VAR 7° W

D-ATIS 126.65
AP01 123.85(127.95)
AP02 119.6(127.95)
TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi
RNAV RWY10(ANRAT,CHI)

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



NOT TO SCALE

TL202: MAX IAS 230kt (For ANRAT-08D,09D)
TL205: MAX IAS 220kt (For CHI-07D)

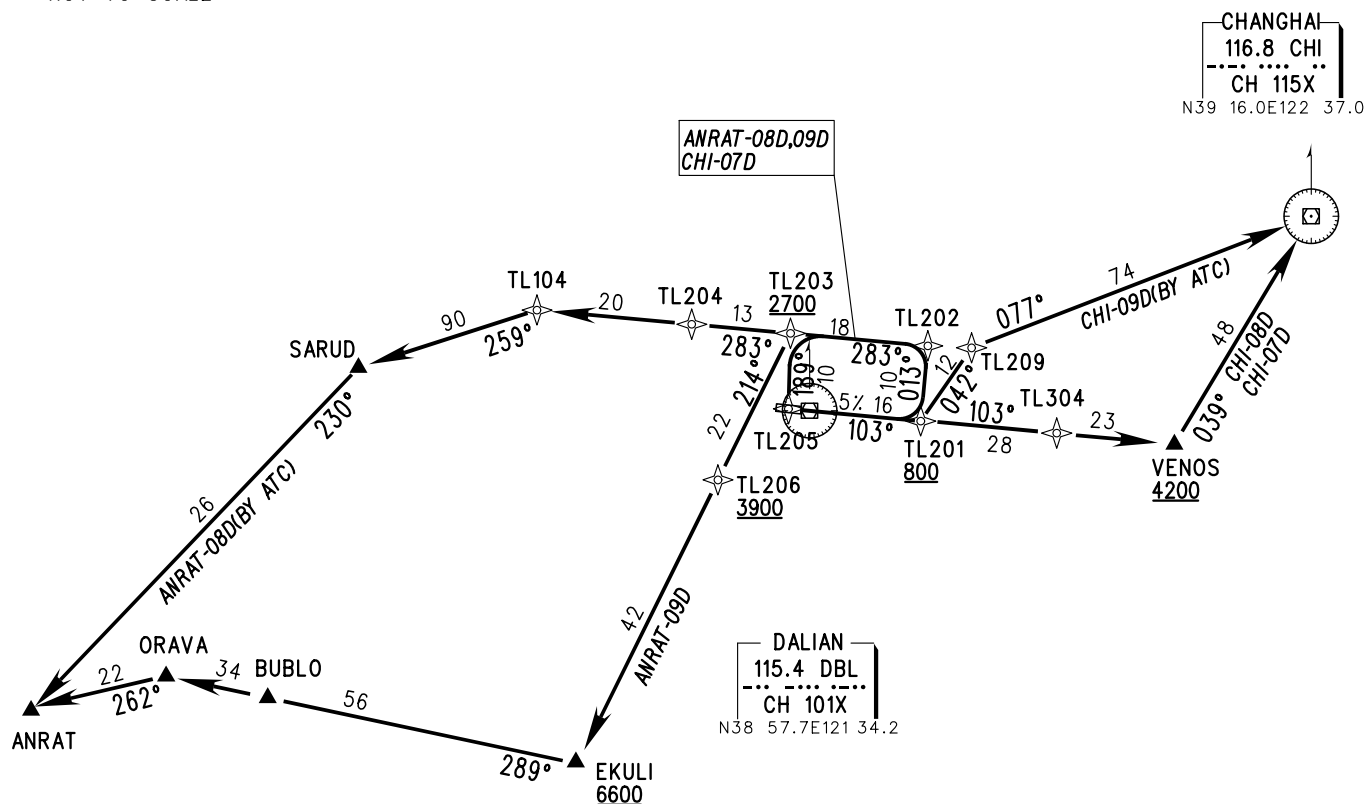

SID	ROUTING	SID	ROUTING
CHI-07D	TL201-TL202-TL203-TL205-TL201-TL304-VENOS-CHI	ANRAT-08D	TL201-TL202-TL204-TL104-SARUD-ANRAT
CHI-08D	TL201-TL304-VENOS-CHI	ANRAT-09D	TL201-TL202-TL203-TL206-EKULI-BUBLO-ORAVA-ANRAT
CHI-09D	TL201-TL209-CHI		

Note: A A close-in obstacle: 1959m on 098° of ARP, altitude 46.5m.

B When aircraft ALT is 3000m or below, MAX IAS is 250kt.

Changes: New chart.

