

STANDARD DEPARTURE CHART-INSTRUMENT

VAR7° W

D-ATIS 126.65
AP01 123.85(127.95)
AP02 119.6(127.95)
TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi
RNAV RWY10(KARPI,SANKO)

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED

TL 3600
TA 3000
3300(QNH $\geq 1031\text{hPa}$)
2700(QNH $\leq 979\text{hPa}$)



NOT TO SCALE

TL202: MAX IAS 230kt (For SANKO-09D, KARPI-08D,09D)

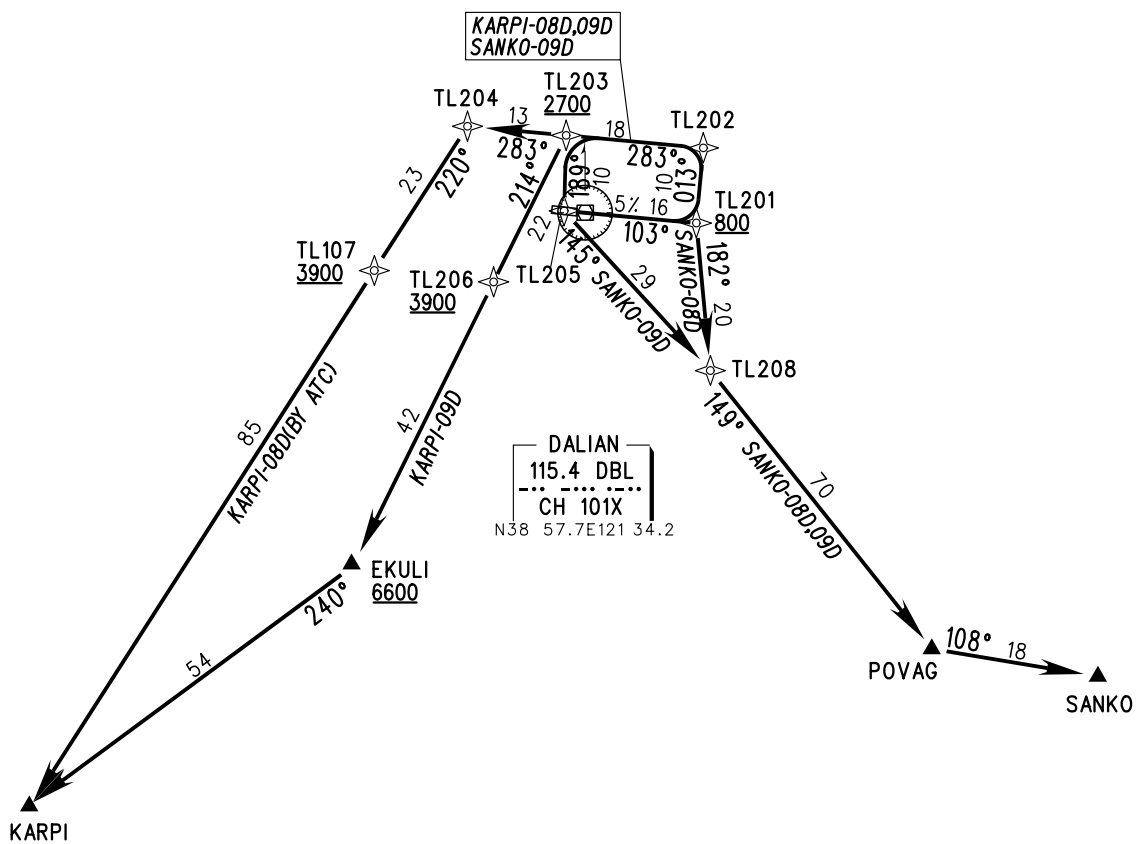


SID	ROUTING	SID	ROUTING
SANKO-08D	TL201-TL208-POVAG-SANKO	KARPI-08D	TL201-TL202-TL203-TL204-TL107-KARPI
SANKO-09D	TL201-TL202-TL203-TL205-TL208-POVAG-SANKO	KARPI-09D	TL201-TL202-TL203-TL206-EKULI-KARPI

Note: **A** A close-in obstacle:1959m on 098° of ARP, altitude 46.5m.

B When aircraft ALT is 3000m or below, MAX IAS is 250kt.

Changes: New chart.



MSA 46km