

STANDARD ARRIVAL CHART-INSTRUMENT

VAR 7° W

D-ATIS 126.65
AP01 123.85(127.95)
AP02 119.6(127.95)
TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi
RNAV RWY28

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED


TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)





NOT TO SCALE

When aircraft ALT is 3000m or below
MAX IAS is 250kt.

CHANGHAI
116.8 CHI
CH 115X
N39 16.0E122 37.0

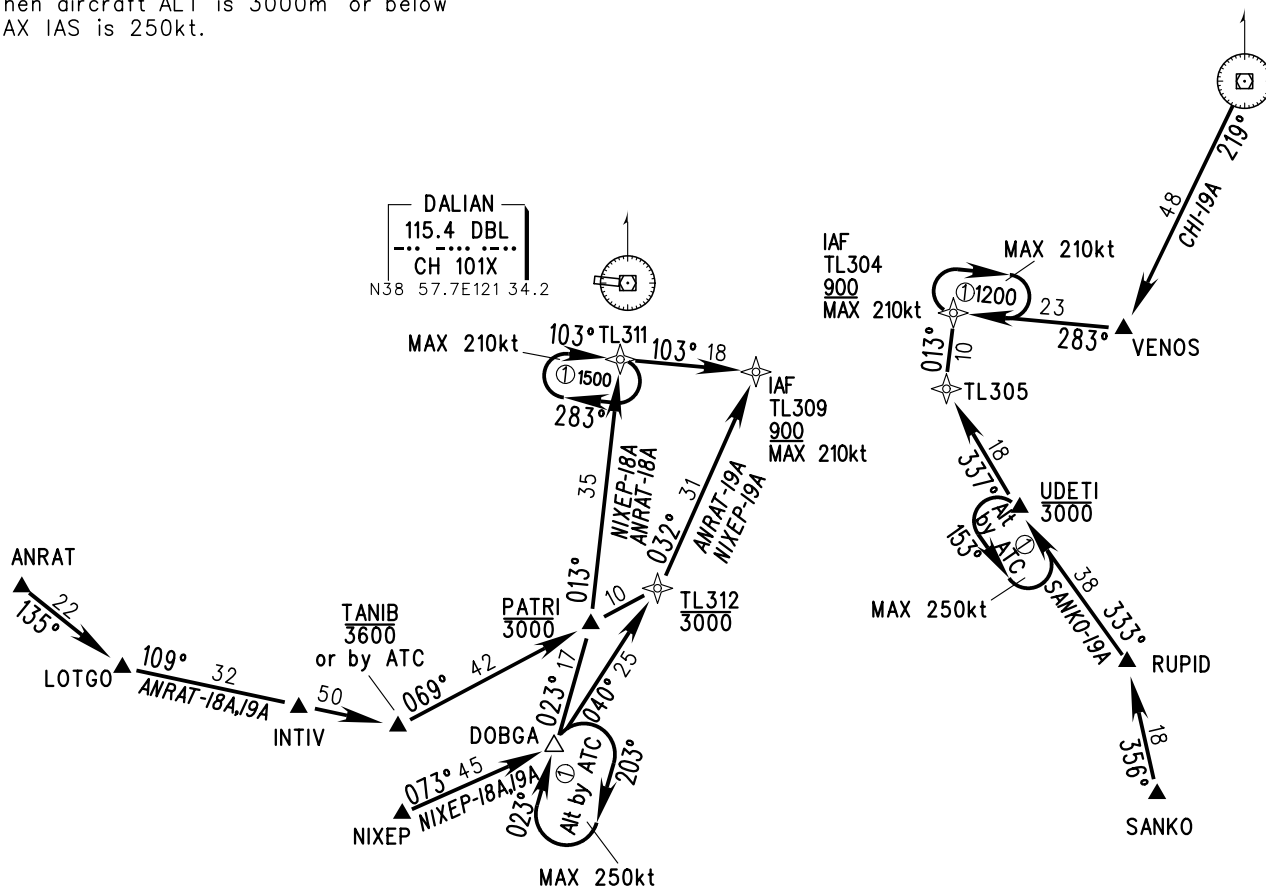

STAR	ROUTING
CHI-19A	CHI-VENOS-TL304
SANKO-19A	SANKO-RUPID-UDETI-TL305-TL304
NIXEP-18A	NIXEP-DOBGA-PATRI-TL311-TL309
NIXEP-19A	NIXEP-DOBGA-TL312-TL309
ANRAT-18A	ANRAT-LOTGO-INTIV-TANIB-PATRI-TL311-TL309
ANRAT-19A	ANRAT-LOTGO-INTIV-TANIB-PATRI-TL312-TL309

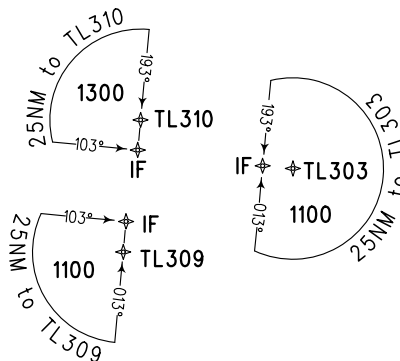

Changes: Routing.