AERODROME CHART

TWR 118.1(124.3)
GND 121.9
Delivery 121.675(DCL AVBL)

ATIS 127.45
APN 121.95(121.8)

ZYTX SHENYANG/Taoxian

N41° 38.5'E123° 29.1' ELEV 61m

RWY	Direction	Bearing strength (PCN)	
06	056°	RWY:	82/F/B/W/T
		TWY A(E-RWY24 THR):	95/F/B/W/T
		TWY A(taxi strip A(06)-RWY06 THR):	85/F/B/W/T
		TWYs C,D,F,R:	82/F/B/W/T
		TWYs M,N,P,P1-P3, stands 111-140,Y02-Y04,Y28-Y34:	80/R/B/W/T
		TWYs A2,A8:	80/F/B/W/T
		TWY A(E-H):	78/F/B/W/T
		TWY E:	75/R/B/W/T
24	236°	TWY G:	75/F/B/W/T
		TWY H:	72/R/B/W/T
		TWY A(H-taxi strip A(06)), stands 101-110,Y16-Y27:	71/R/B/W/T
		TWYs M,N,P:	71/F/B/W/T
		TWYs J,K:	64/R/B/W/T
		Stands A01-A04,Y01,Y06-Y15:	62/R/B/W/T
		TWY Z, stands G1A,G2A:	58/R/B/W/T
		TWY B:	38/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

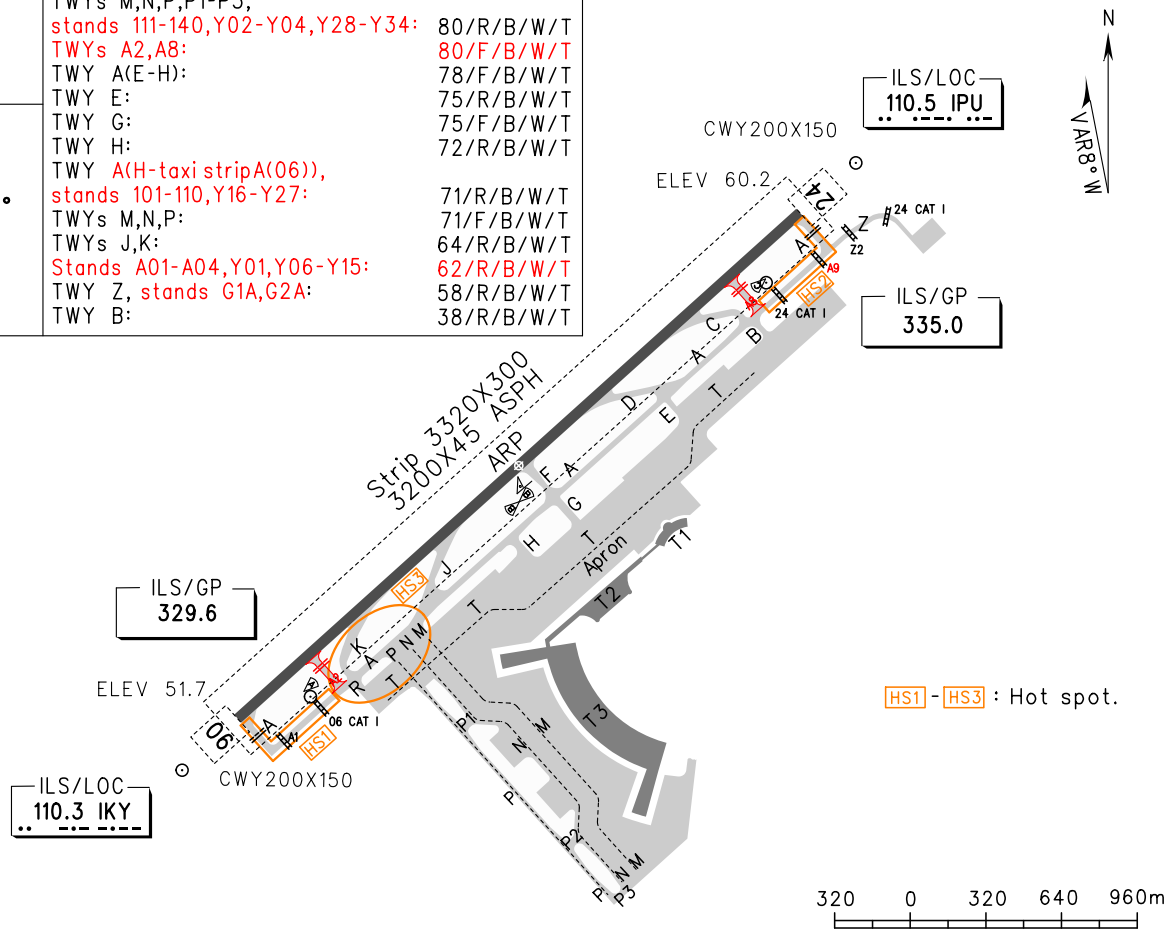

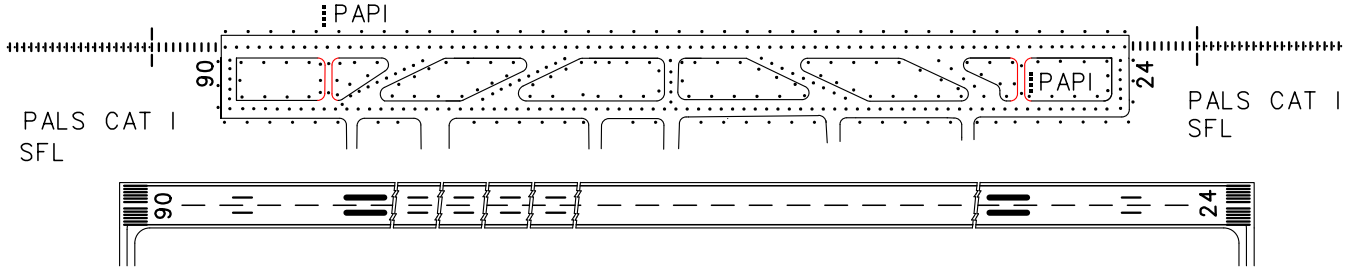

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type		RWY06		RWY24		RWY06	RWY24
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	PALS CAT I PAPI REDL RCLL SFL	PALS CAT I PAPI REDL RCLL SFL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							

Changes: A2, A8, holding position, PCN.