

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM




NOT TO SCALE


1. RNAV1, GNSS/RADAR REQUIRED.
2. RNP1, GNSS REQUIRED.

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

KAIYUAN
114.9 KYU
CH 96X
N42 37.9E124 00.4

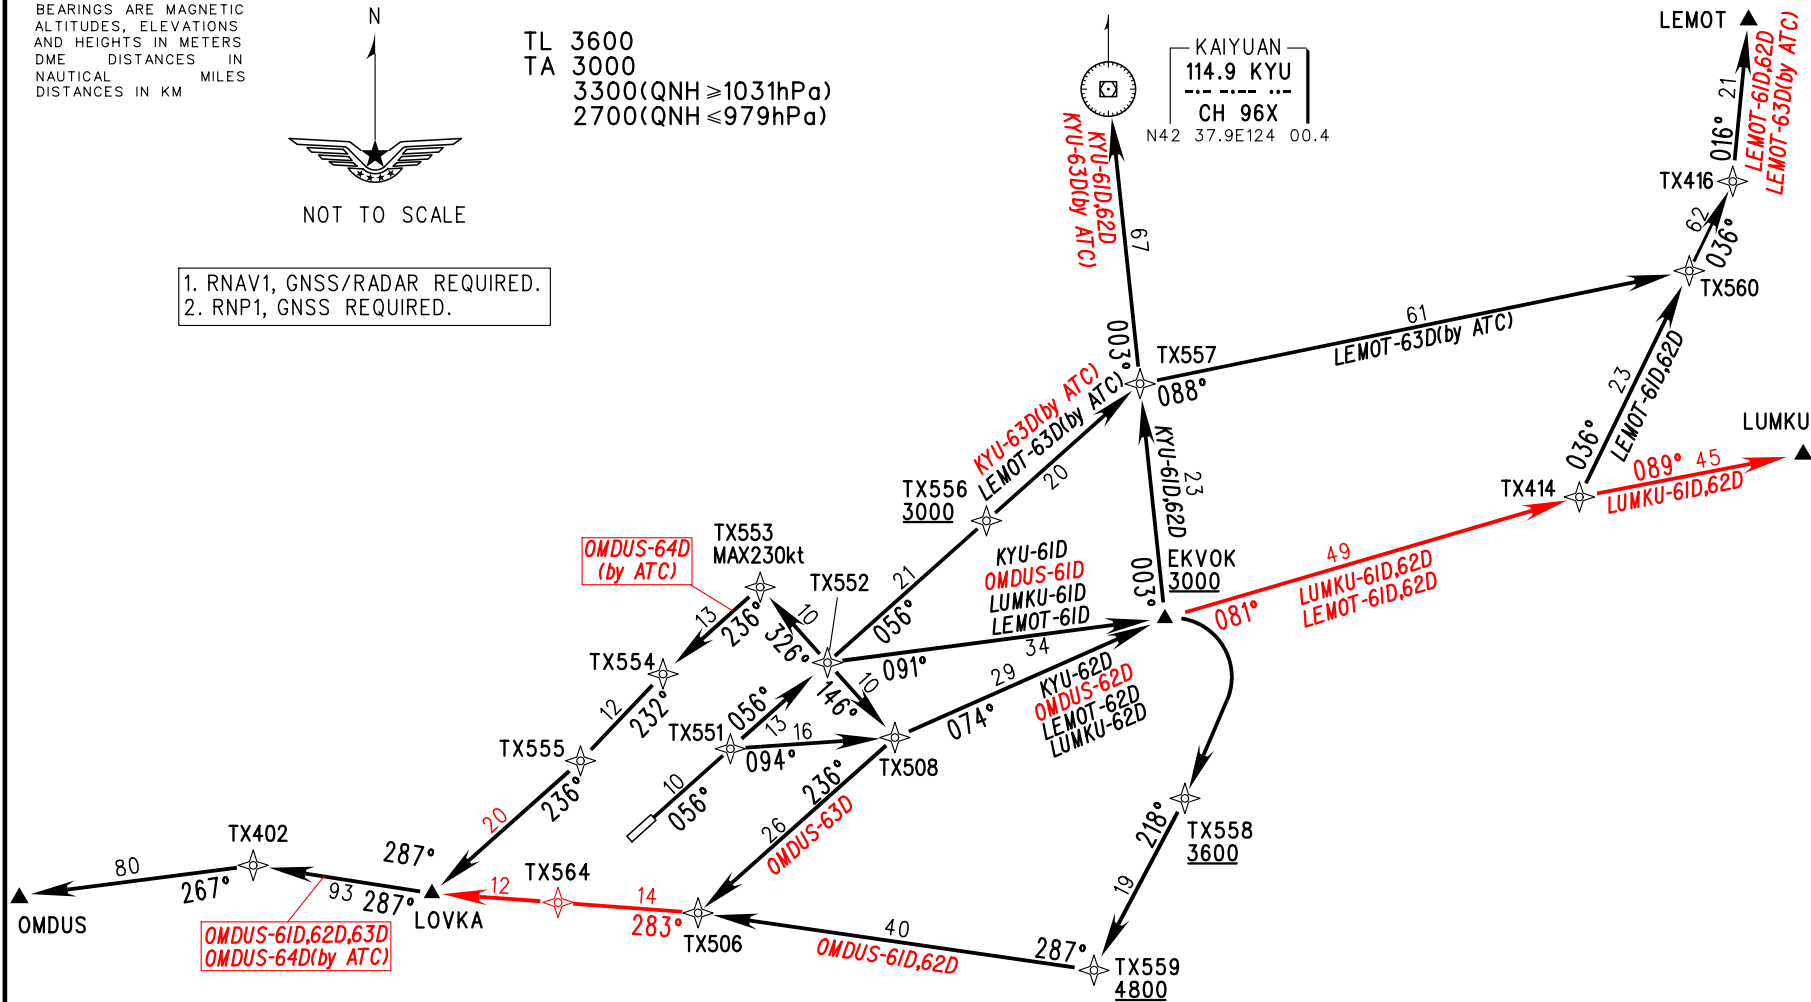

In OMDUS-63D, TX508 MAX IAS230kt.
In OMDUS-61D,62D, EKVOK is flyover, MAX IAS270kt.



Changes: APP. Procedure.

STANDARD DEPARTURE CHART-INSTRUMENT

ATIS 127.45
APP01 125.55(126.55)
APP02 119.825(126.55)
TWR 118.1(124.3)

ZYTX SHENYANG/TAOXIAN
(OMDUS KYU LEMOT LUMKU)
RNAV Rwy06