

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON DEP 135.4
YEOSU TWR 122.5
240.9


YEOSU/Yeosu(RKJY)

RWY 17

RNAV ANUBA 1M, RNAV GOSBO 1M

RNAV TEDAN 1M

Note : Departure under ICAO Flight Procedures.

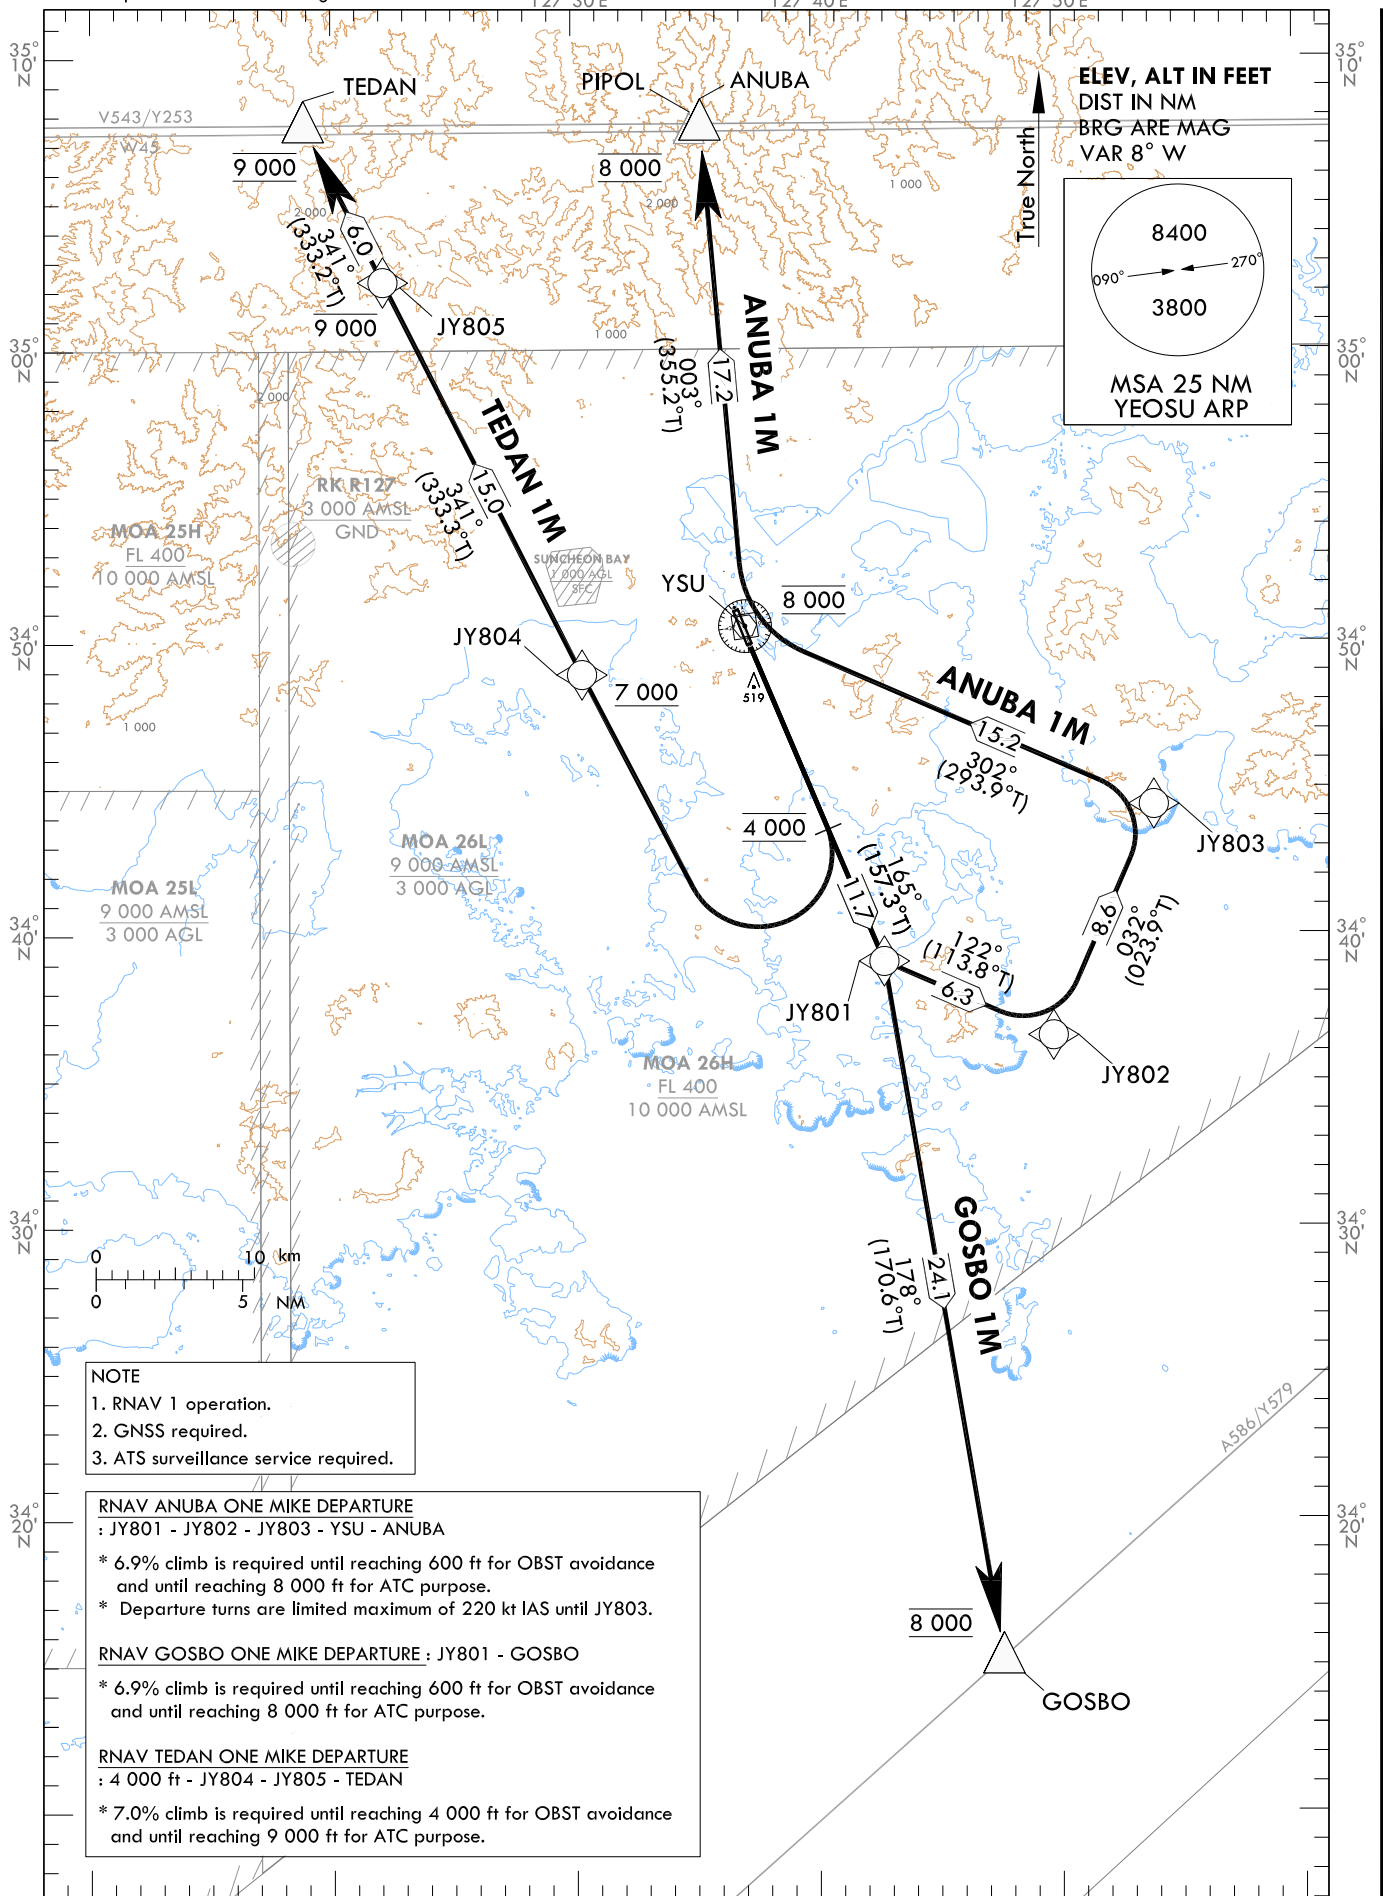

YEOSU/Yeosu(RKJY)

RWY 17

RNAV ANUBA 1M, RNAV GOSBO 1M

RNAV TEDAN 1M

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV ANUBA 1M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	JY801	-	165(157.3)	11.7	-	-	-220	34°39'05.5"N 127°42'49.7"E	-	RNAV 1	-
002	TF	JY802	-	122(113.8)	6.3	-	-	-220	34°36'32.5"N 127°49'48.6"E	-	RNAV 1	-
003	TF	JY803	-	032(023.9)	8.6	-	-	-220	34°44'25.1"N 127°54'02.0"E	-	RNAV 1	-
004	TF	YSU	-	302(293.9)	15.2	-	@8 000	-	34°50'34.3"N 127°37'08.7"E	-	RNAV 1	-
005	TF	ANUBA	-	003(355.2)	17.2	-	@8 000	-	35°07'45.9"N 127°35'22.8"E	-	RNAV 1	-

RNAV GOSBO 1M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	JY801	-	165(157.3)	11.7	-	-	-	34°39'05.5"N 127°42'49.7"E	-	RNAV 1	-
002	TF	GOSBO	-	178(170.6)	24.1	-	@8 000	-	34°15'16.8"N 127°47'34.4"E	-	RNAV 1	-

RNAV TEDAN 1M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CA	-	-	165(157.3)	-	-	@4 000	-	-	-	RNAV 1	-
002	DF	JY804	-	-	-	R	+7 000	-	34°48'55.7"N 127°30'22.5"E	-	RNAV 1	-
003	TF	JY805	-	341(333.3)	15.0	-	-9 000	-	35°02'21.9"N 127°22'09.7"E	-	RNAV 1	-
004	TF	TEDAN	-	341(333.2)	6.0	-	@9 000	-	35°07'43.8"N 127°18'52.1"E	-	RNAV 1	-

Change : Information of standard instrument departure procedure for RWY 17.


**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON	DEP	135.4
YEOSU	TWR	122.5
		240.9

YEOSU/Yeosu(RKJY)
RWY 17
ANUBA 5S
GOSBO 4S

Note : Departure under ICAO Flight Procedures.

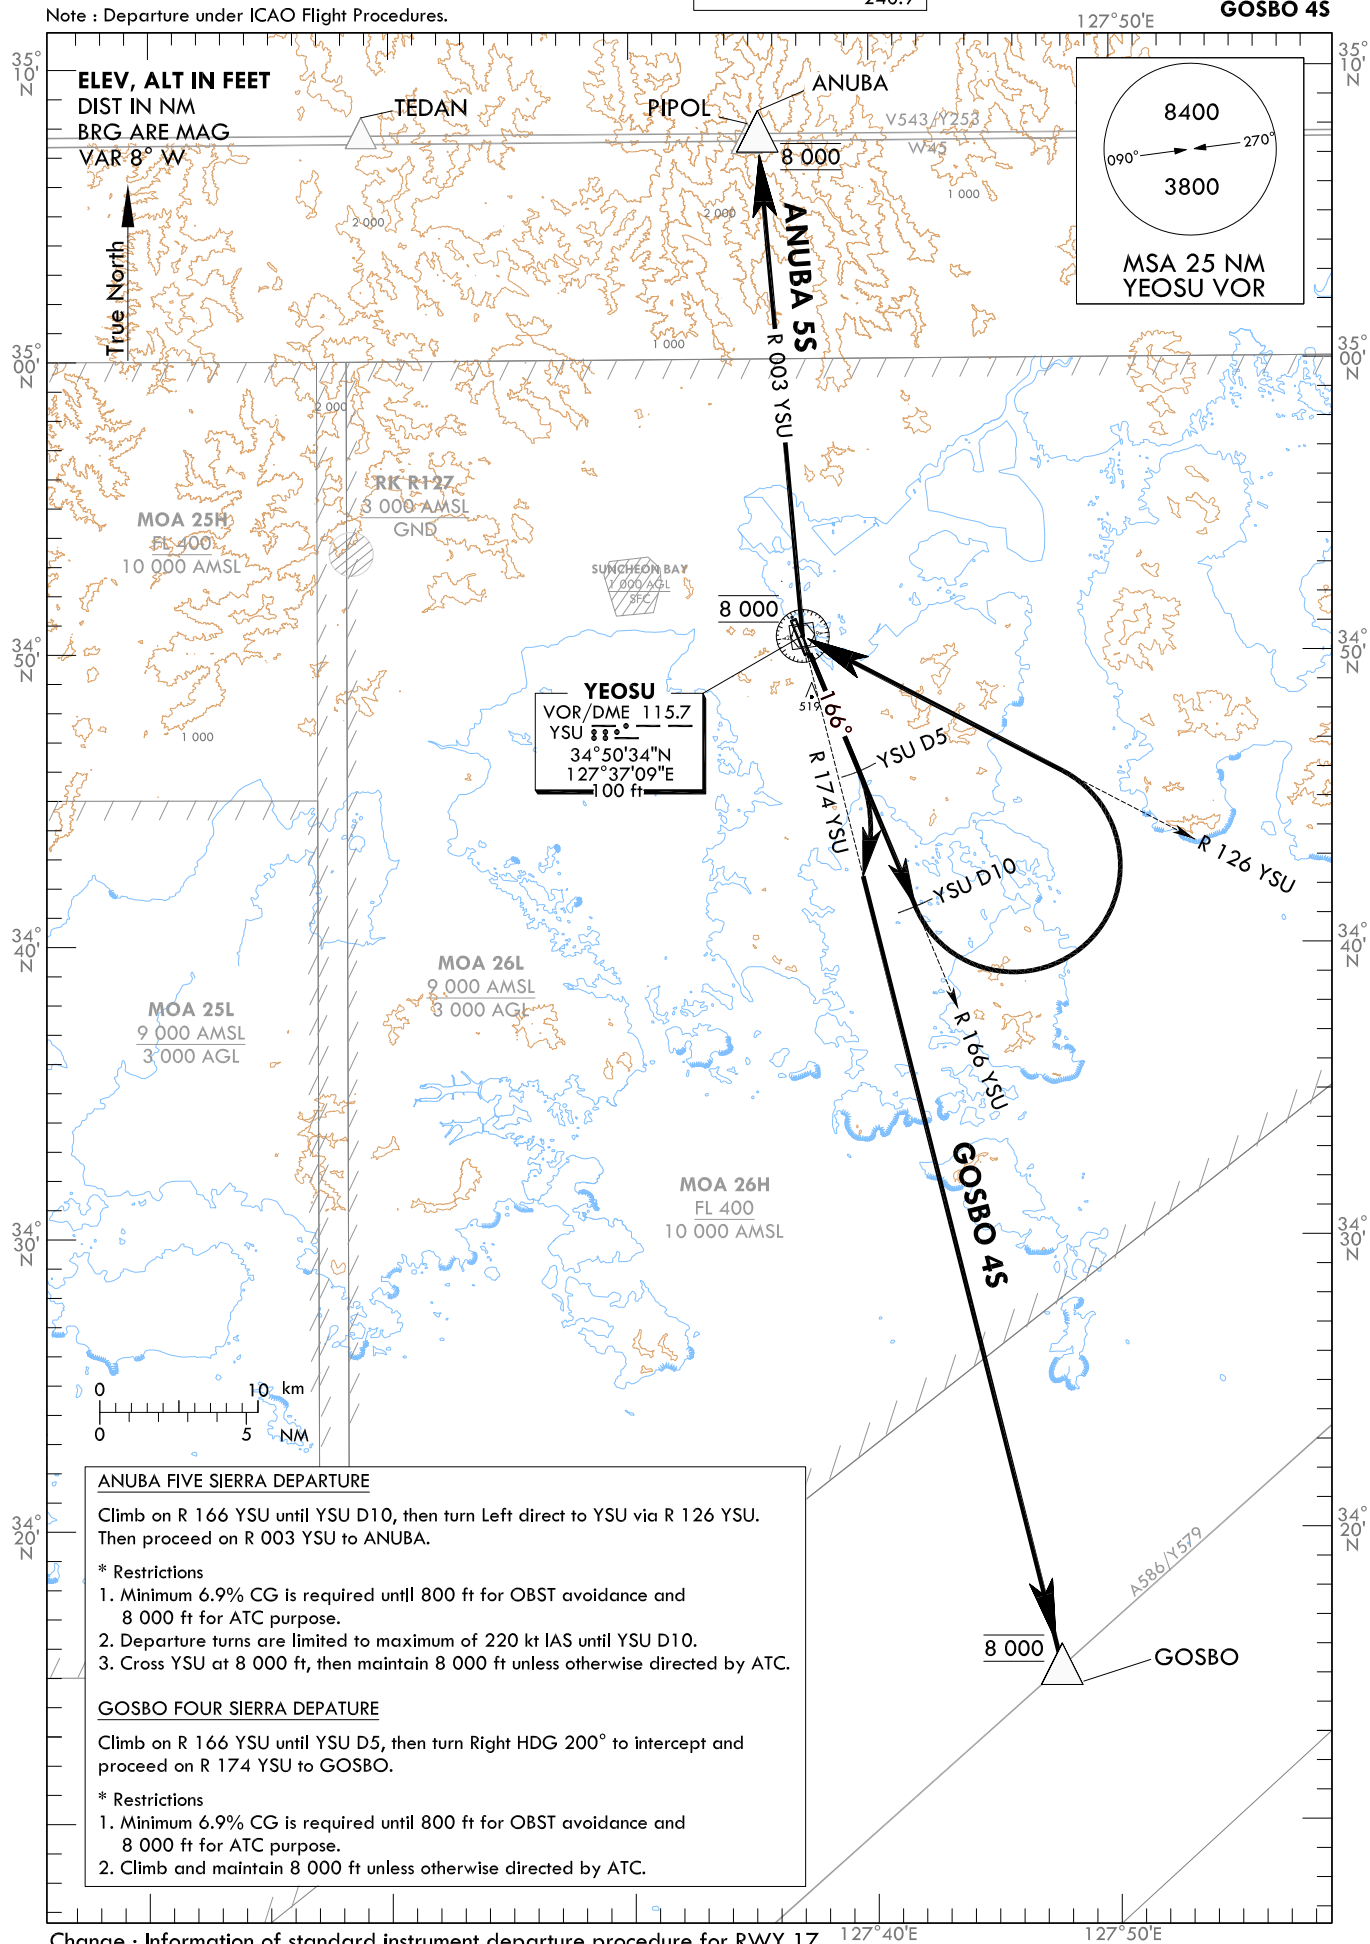

Change : Information of standard instrument departure procedure for RWY 17.

INTENTIONALLY

LEFT

BLANK

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**


TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON DEP 135.4
YEOSU TWR 122.5
240.9

**YEOSU/Yeosu(RKJY)
RWY 35**

**RNAV GOSBO 1R, RNAV GOSBO 6R
RNAV ANUBA 1R, RNAV TEDAN 1R**

Note : Departure under ICAO Flight Procedures.

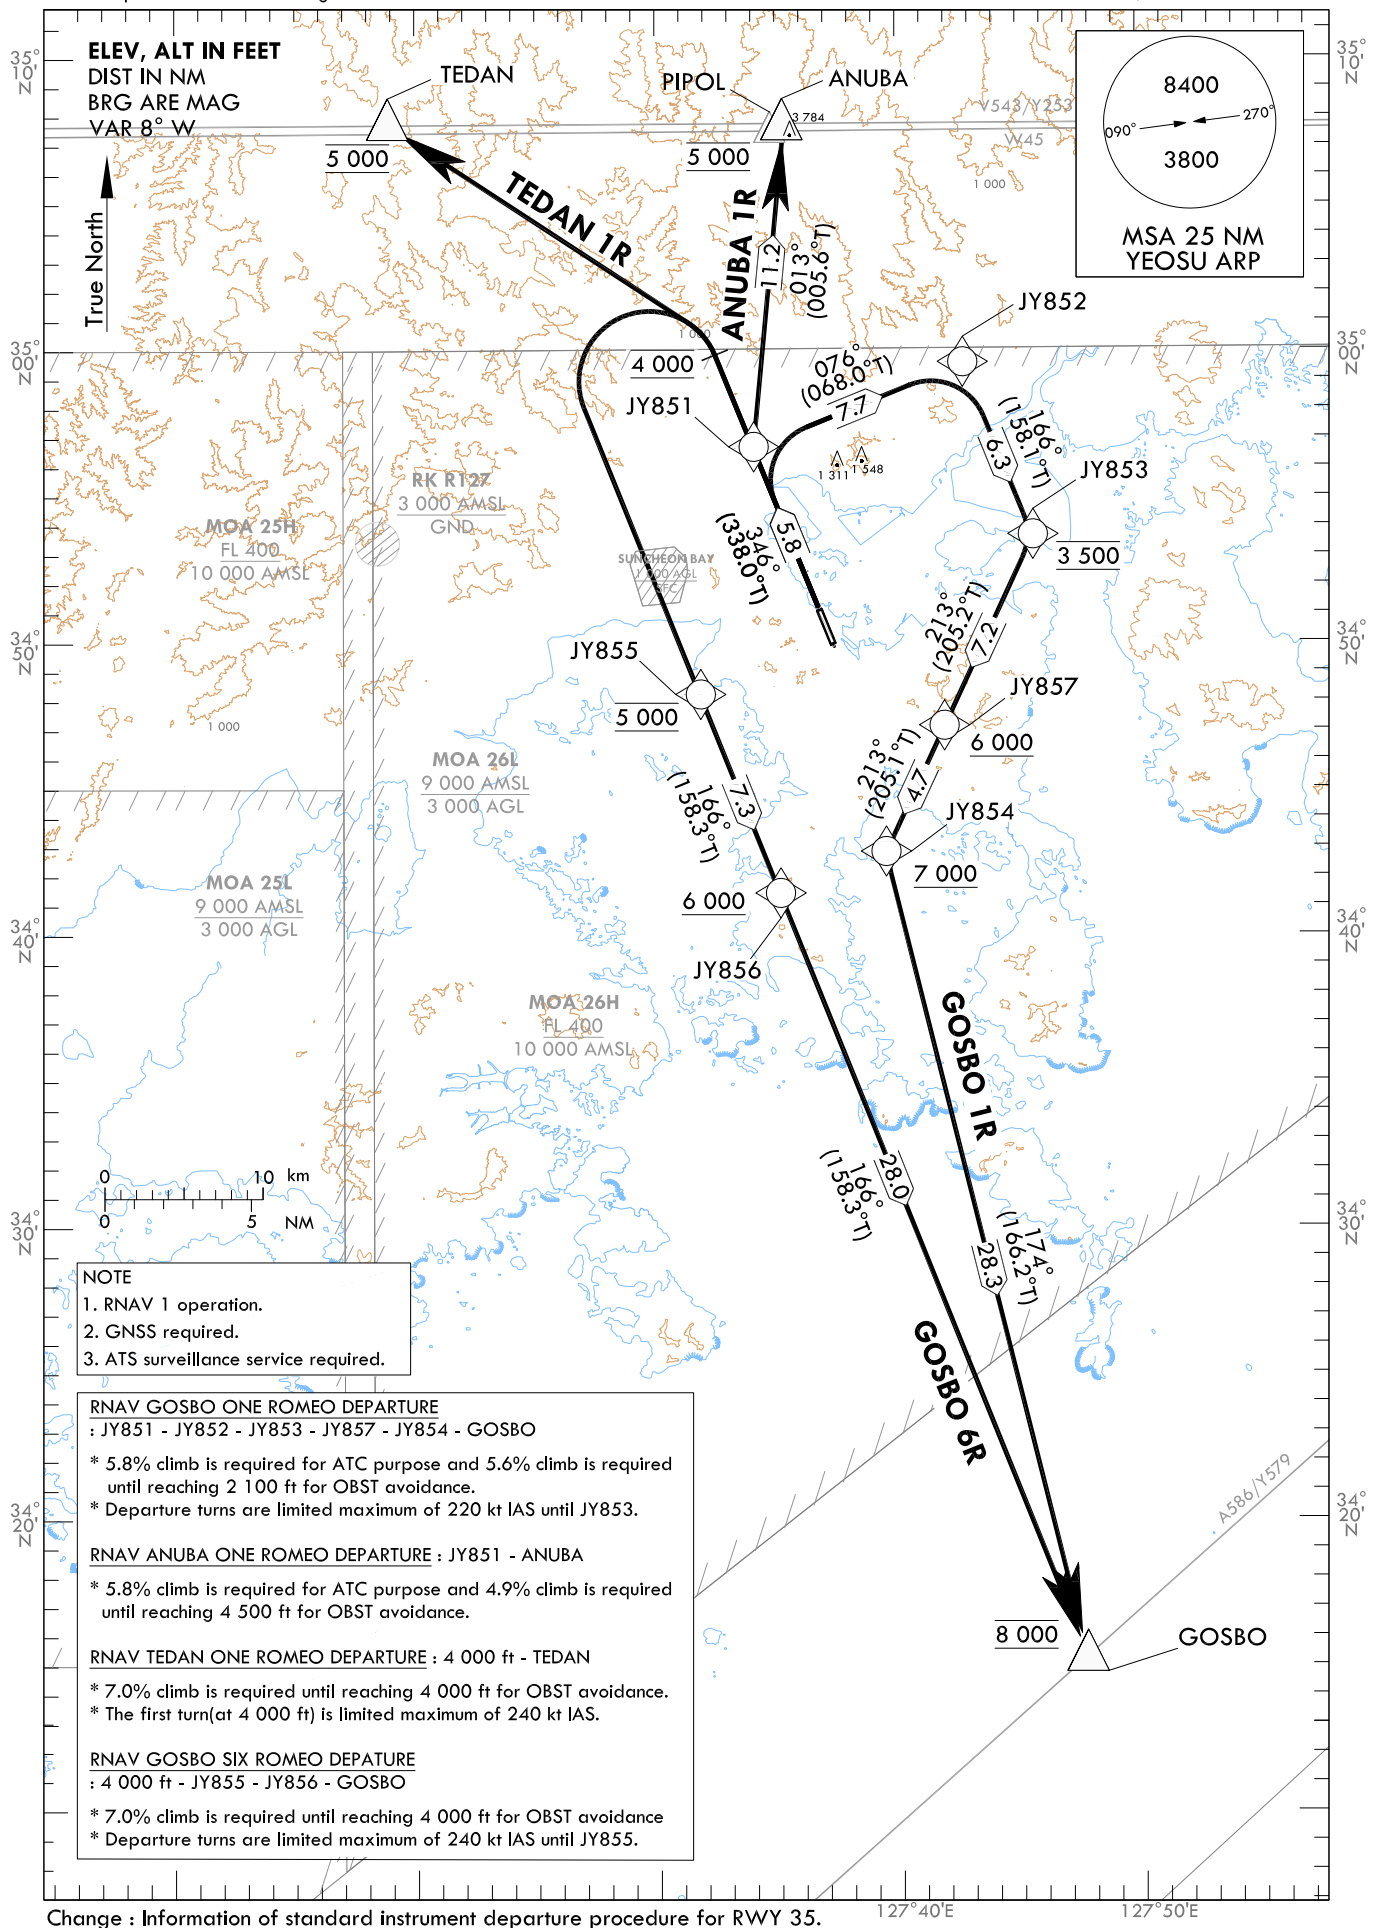

Change : Information of standard instrument departure procedure for RWY 35.

YEOSU/Yeosu(RKJY)

RWY 35

RNAV GOSBO 1R, RNAV GOSBO 6R

RNAV ANUBA 1R, RNAV TEDAN 1R

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV GOSBO 1R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	JY851	-	346(338.0)	5.8	-	-	-220	34°56'38.1"N 127°34'02.9"E	-	RNAV 1	-
002	TF	JY852	-	076(068.0)	7.7	-	-	-220	34°59'31.1"N 127°42'44.3"E	-	RNAV 1	-
003	TF	JY853	-	166(158.1)	6.3	-	@3 500	-220	34°53'37.1"N 127°45'37.1"E	-	RNAV 1	-
005	TF	JY857	-	213(205.2)	7.2	-	+6 000	-	34°47'05.5"N 127°41'54.0"E	-	RNAV 1	-
006	TF	JY854	-	213(205.1)	4.7	-	+7 000	-	34°42'47.3"N 127°39'27.4"E	-	RNAV 1	-
007	TF	GOSBO	-	174(166.2)	28.3	-	@8 000	-	34°15'16.8"N 127°47'34.4"E	-	RNAV 1	-

RNAV ANUBA 1R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CF	JY851	-	346(338.0)	5.8	-	-	-	34°56'38.1"N 127°34'02.9"E	-	RNAV 1	-
002	TF	ANUBA	-	013(005.6)	11.2	-	@5 000	-	35°07'45.9"N 127°35'22.8"E	-	RNAV 1	-

RNAV TEDAN 1R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CA	-	-	346(338.0)	-	-	@4 000	-240	-	-	RNAV 1	-
002	DF	TEDAN	-	-	-	L	@5 000	-	35°07'43.8"N 127°18'52.1"E	-	RNAV 1	-

RNAV GOSBO 6R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	CA	-	-	346(338.0)	-	-	@4 000	-240	-	-	RNAV 1	-
002	DF	JY855	-	-	-	L	@5 000	-240	34°48'10.7"N 127°31'48.2"E	-	RNAV 1	-
003	TF	JY856	-	166(158.3)	7.3	-	+6 000	-	34°41'22.6"N 127°35'04.9"E	-	RNAV 1	-
004	TF	GOSBO	-	166(158.3)	28.0	-	@8 000	-	34°15'16.8"N 127°47'34.4"E	-	RNAV 1	-

Change : Amended phrase(VPA/TCH → VPA/RDH).


**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON DEP 135.4
YEOSU TWR 122.5
240.9

YEOSU/Yeosu(RKJY)
RWY 35
ANUBA 5N
GOSBO 5N

Note : Departure under ICAO Flight Procedures.

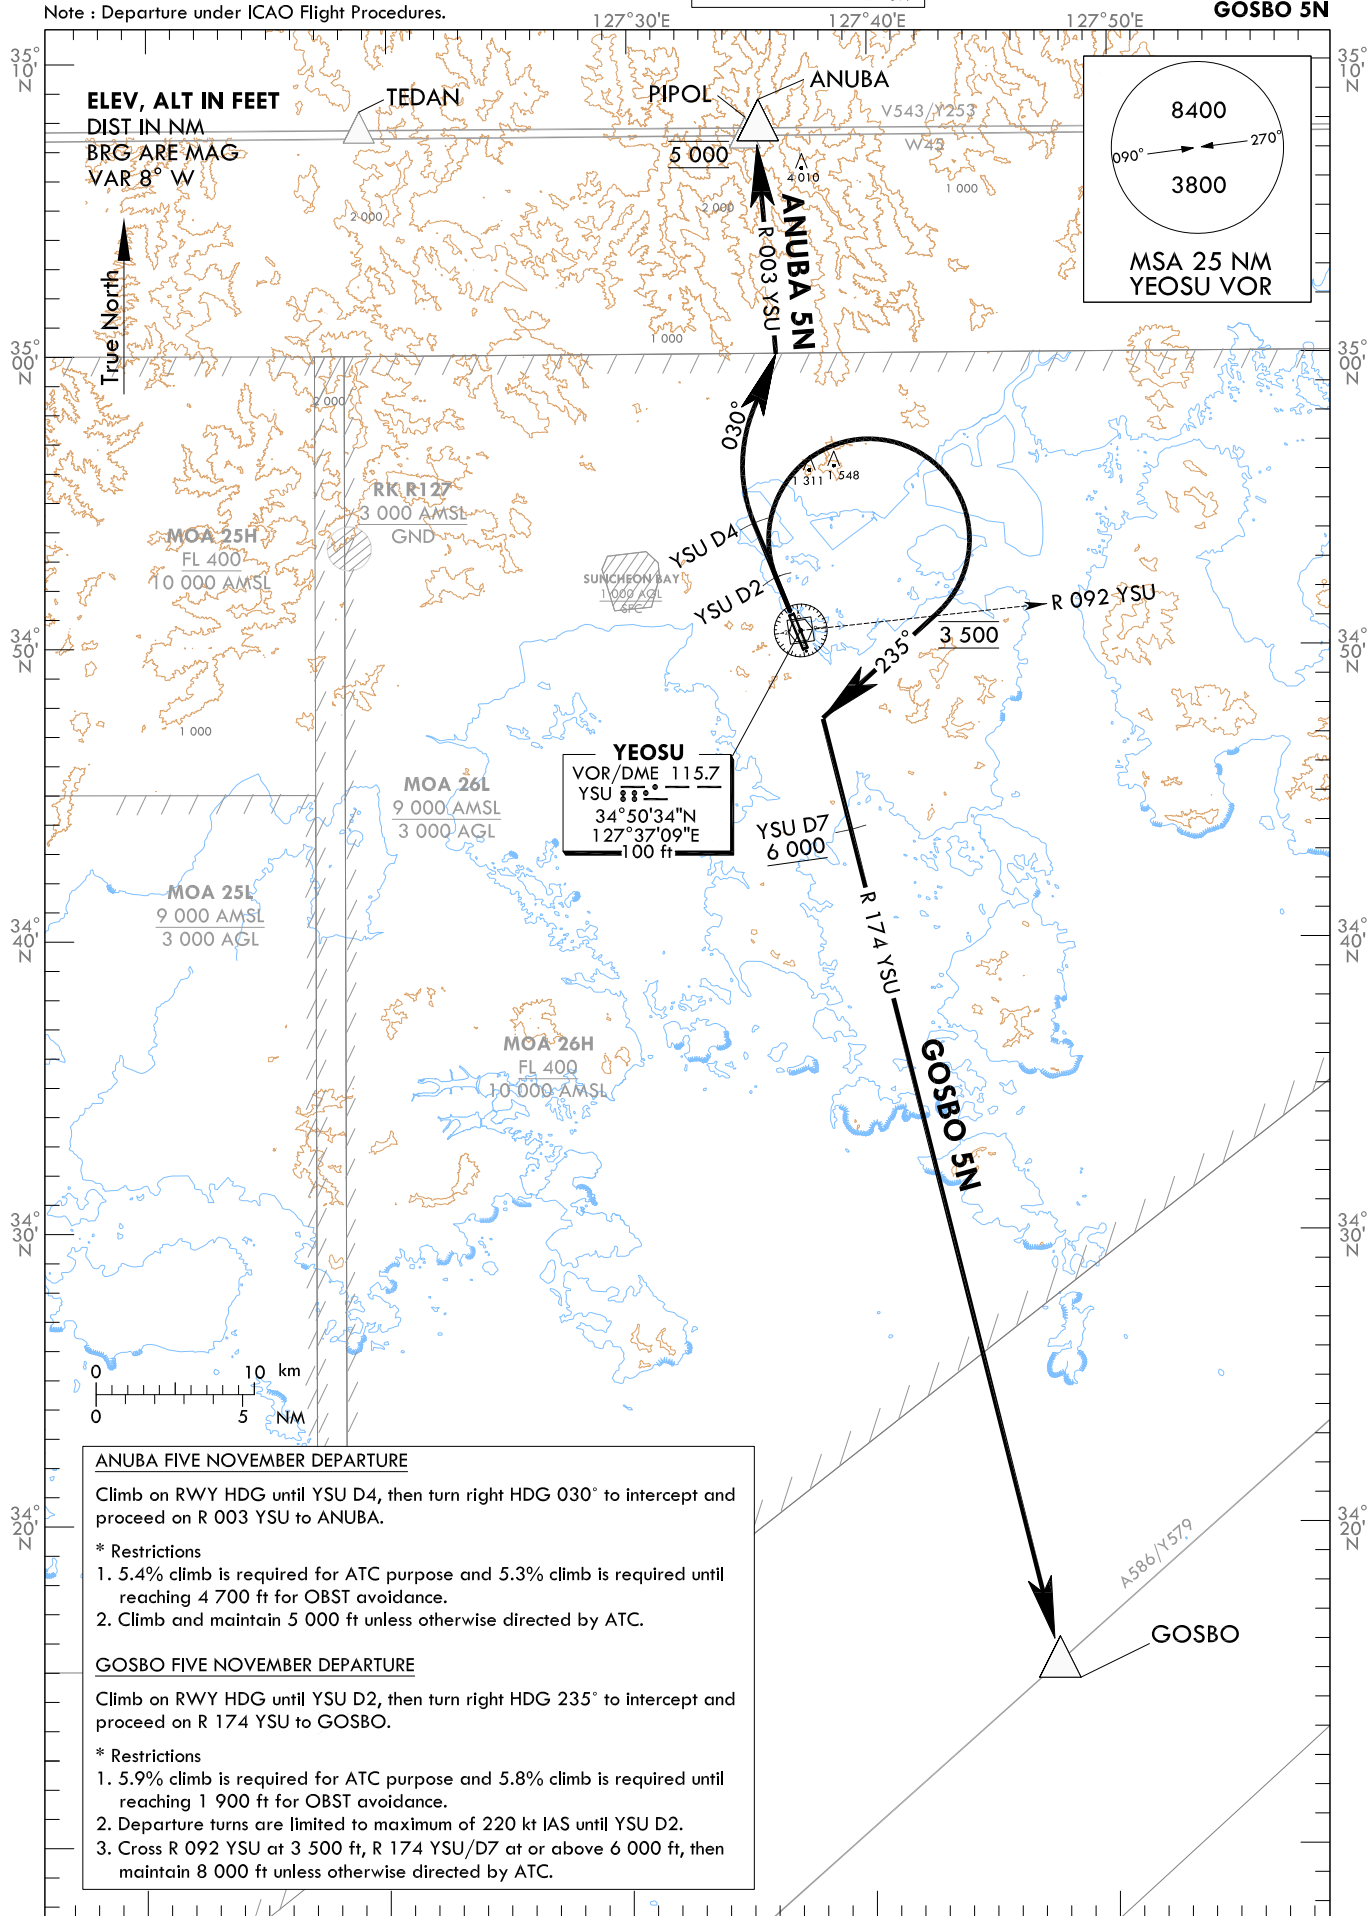

Change : Information of standard instrument departure procedure for RWY 35.

INTENTIONALLY

LEFT

BLANK