

TEL : 82-53-668-0286
FAX : 82-53-668-0277
AFS : RKRRYNYX
E-mail : aisd@korea.kr
Web : <https://aim.koca.go.kr>

REPUBLIC OF KOREA

Ministry of Land, Infrastructure and Transport
Office of Civil Aviation

11, Doum 6-ro, Sejong-si, 30103, Republic of Korea

AIRAC

AIP

Supplement 17/25

6 FEB 2025

GEN : NIL

ENR : NIL

A D : SEOUL/Gimpo INTL(RKSS)

OPERATIONAL RESTRICTIONS

(Effective : 1600UTC 19 MAR 2025)

1. INTRODUCTION

Aprons(ACFT stands NR. 35 to 36, 209) at Gimpo INTL Airport will be closed as follows due to pavement construction.

2. PERIOD

From 1600 UTC 19 MAR 2025 To 1600 UTC 14 MAY 2025

3. WORKING AREAS (See the diagram below)

Location	Period	Working Hours
ACFT stands NR. 35 to 36, 209	From 1600 UTC 19 MAR 2025 To 1600 UTC 14 MAY 2025	H24

4. REMARKS

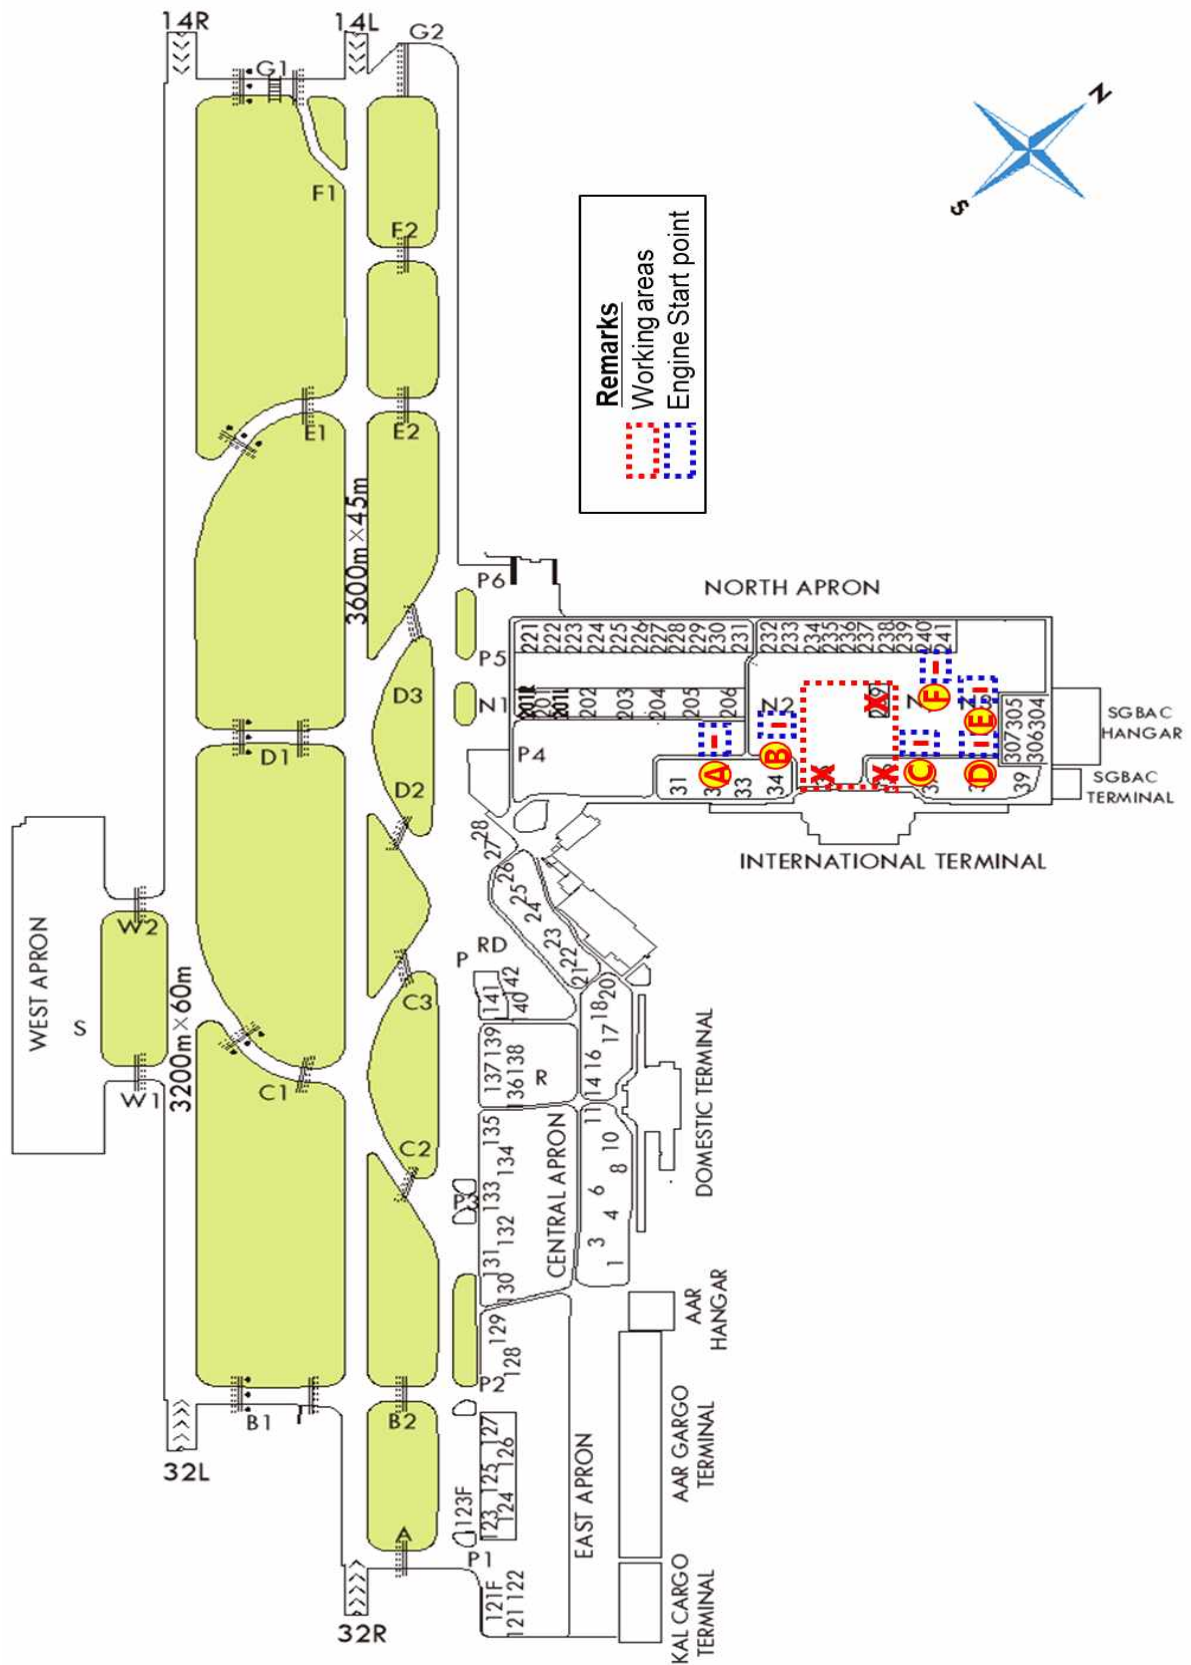
- (1) Safety fences and lights will be installed to indicate the working area.
 (2) ACFT stand NR. 201(201L, 201R) will be used as multi-aircraft ramping system(MARS).
 (3) Departure procedures

ACFT Stands	Lead-out Procedures	Phraseology
NR. 31	All ACFT shall be pushed back to face southwest on P4.	Push-back approved
NR. 32~33	All ACFT shall be pushed back to face southwest on P4 and then towed forward until its nosewheel is at the start point A on P4.	Push-back approved at start point A
NR. 34	All ACFT shall be pushed back to face southeast on N2 until its nosewheel is at the start point B on N2.	Push-back approved at start point B
	If instructed to push-back approved at start point A, ACFT shall be pushed back to face southeast on N2 and then towed forward until its nosewheel is at the start point A on P4.	Push-back approved at start point A
NR. 37~38	All ACFT shall be pushed back to face southeast on NY until its nosewheel is at the start point C on NY.	Push-back approved at start point C
	If instructed to Push-back approved at start point F, ACFT shall be pushed back to face southwest on P5 through NY and then towed forward until its nosewheel is at the start point F on P5.	Push-back approved at start point F
NR. 38	If instructed to push-back approved at start point D, ACFT shall be pushed back to face southeast on N3 until its nosewheel is at the start point D on N3.	Push-back approved at start point D
NR. 39	All ACFT shall be pushed back to face southwest on P5 through N3 and then towed forward until its nosewheel is at the start point F on P5.	Push-back approved at start point F
	If instructed to push-back approved at start point D, ACFT shall be pushed back to face southeast on N3 until its nosewheel is at the start point D on N3.	Push-back approved at start point D
NR. 201~205	Self-maneuvering stands(Up to code letter "D").	Start-up approved
	Code letter "E" ACFT shall be pushed back to face southwest on P5.	Push-back approved
NR. 206	Self-maneuvering stand(Up to code letter "D").	Start-up approved
NR. 221~239	All ACFT shall be pushed back to face southwest on P5.	Push-back approved
NR. 240~241	All ACFT shall be pushed back to face southwest on P5 and then towed forward until its nosewheel is at the start point F on P5.	Push-back approved at start point F
	If instructed to push-back approved at start point E, ACFT shall be pushed back to face northwest on N3 until its nosewheel is at the start point E on N3.	Push-back approved at start point E
NR. 304~307	All ACFT shall be pushed back to face northwest on N3 and then towed forward until its nosewheel is at the start point E on N3.	Push-back approved at start point E
	If instructed to push-back approved at start point D, ACFT shall be pushed back to face southeast on N3 and then towed forward until its nosewheel is at the start point D on N3.	Push-back approved at start point D

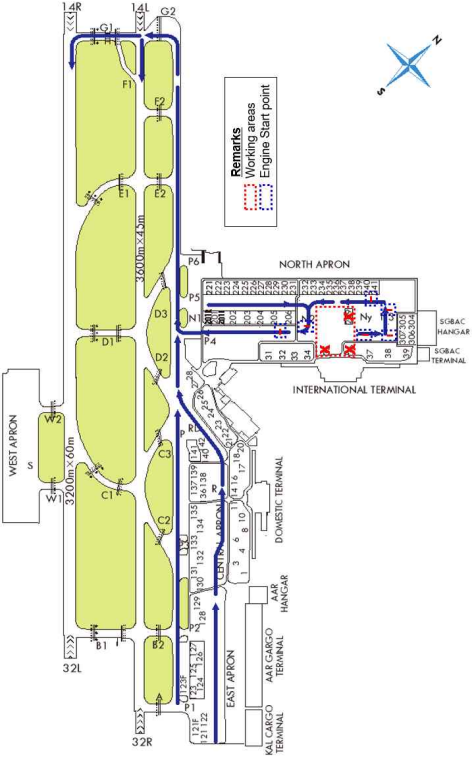
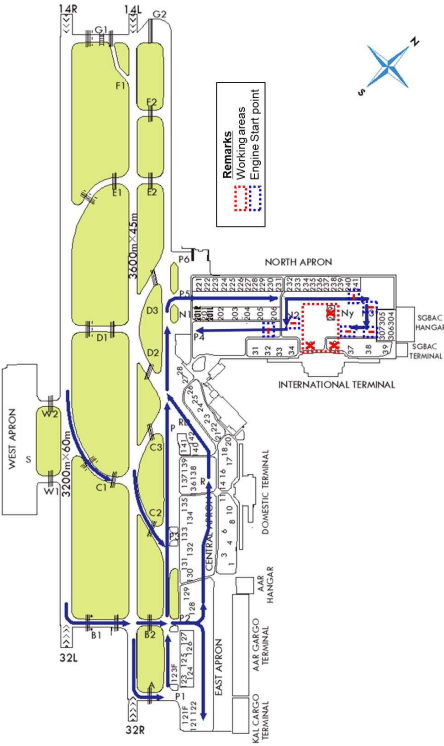
- (4) Any change to the contents of these pages will be notified by NOTAM.

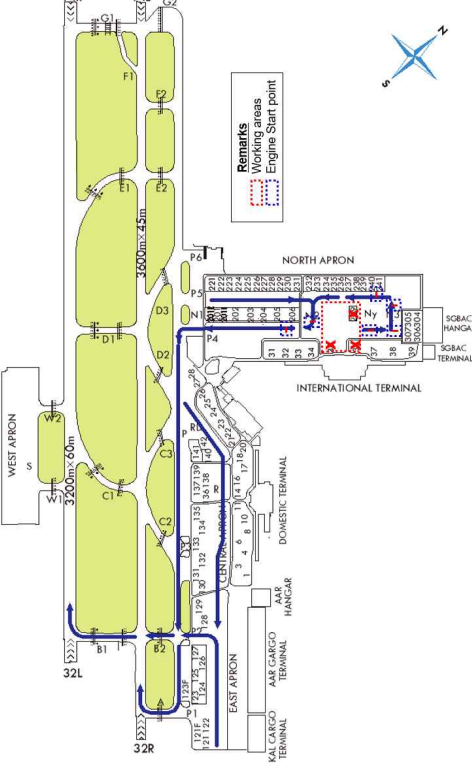
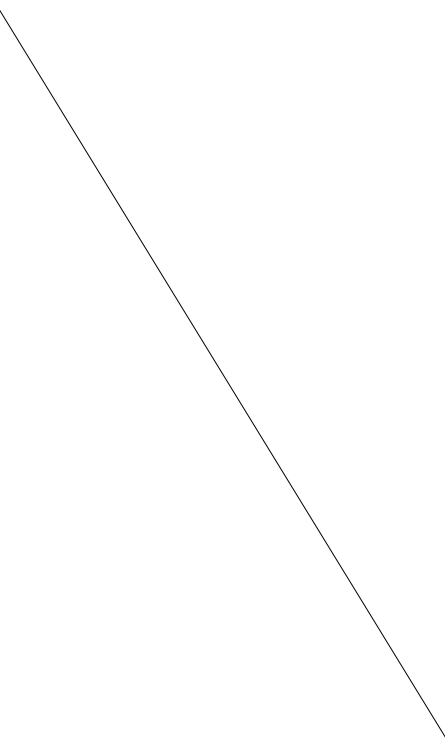
(AIRAC AIP SUP 81/24 is hereby superseded)

5. DIAGRAM



6. LOW VISIBILITY PROCEDURES

Departure	
Arrival	
	14R/L

	
	32R/L