



**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 13R - ELEV 110 ft
HIGHEST ELEV TDZ 111 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

**DAEGU/Daegu Intl(RKTN)
ILS
RWY 13R**

Note : Approach and circle to land under U.S. TERPS.

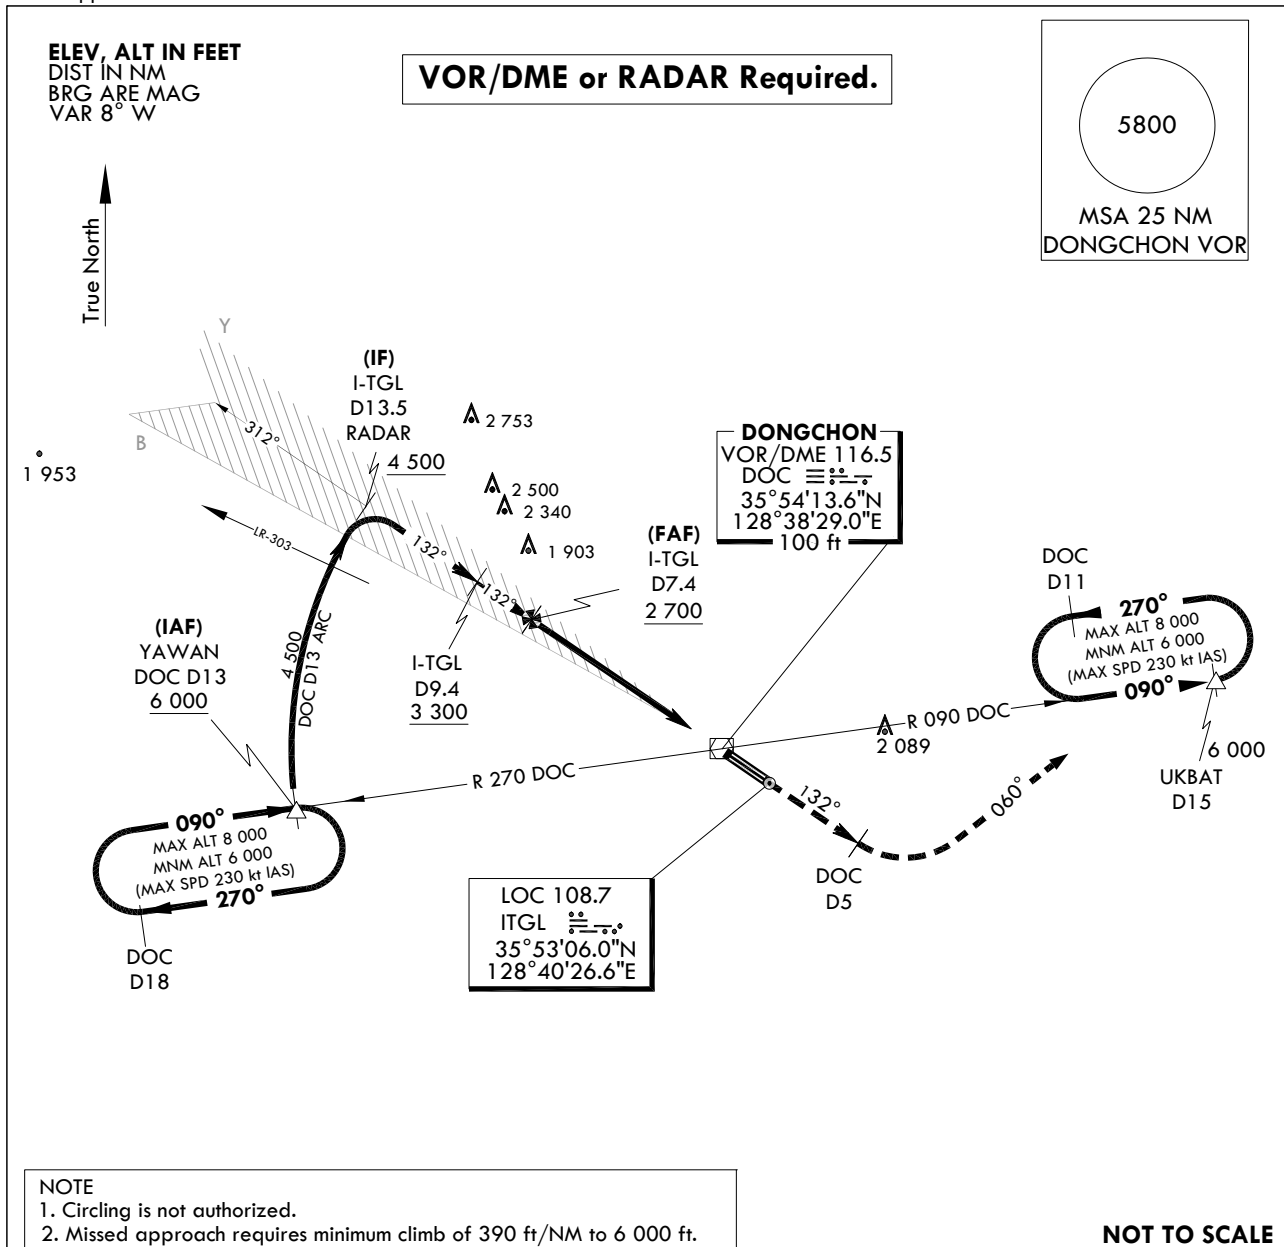


MISSED APPROACH CLIMB RATE TABLE

RWY	Knots	60	120	180	240	300	TO
13R	V/V(fpm)	390	780	1 170	1 560	1 950	6 000

MISSED APPROACH

Climb to 6 000 ft via HDG 132° to DOC 5 DME and climbing left turn HDG 060° to intercept R 090 DOC and R 090 DOC to UKBAT and hold, continue climb-in-holding to 6 000 ft.

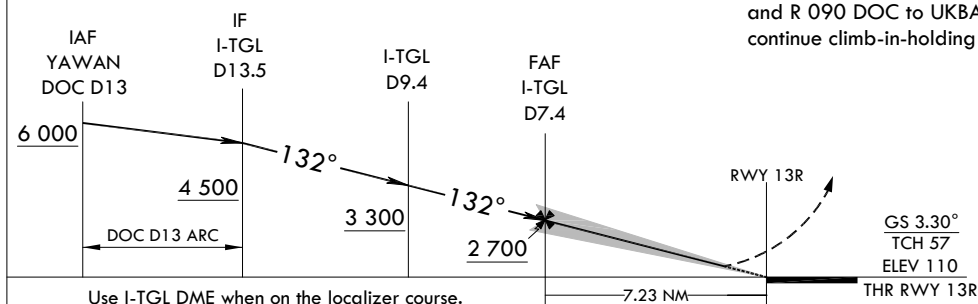

CATEGORY		A	B	C	D	E
S-ILS 13R	FULL		657 - 1 1/2	546(600 - 1 1/2)		
	ALS INOP		657 - 1 5/8	546(600 - 1 5/8)		

Change : Amended chart symbols.

INTENTIONALLY

LEFT


BLANK

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 13R - ELEV **110 ft**
HIGHEST ELEV TDZ **111 ft**

DAEGU	APP	135.9	346.3
DAEGU	TWR	126.2	236.6
		365.0	

**DAEGU/Daegu Intl(RKTN)
LOC/DME
RWY 13R**

Note : Approach and circle to land under U.S. TERPS.

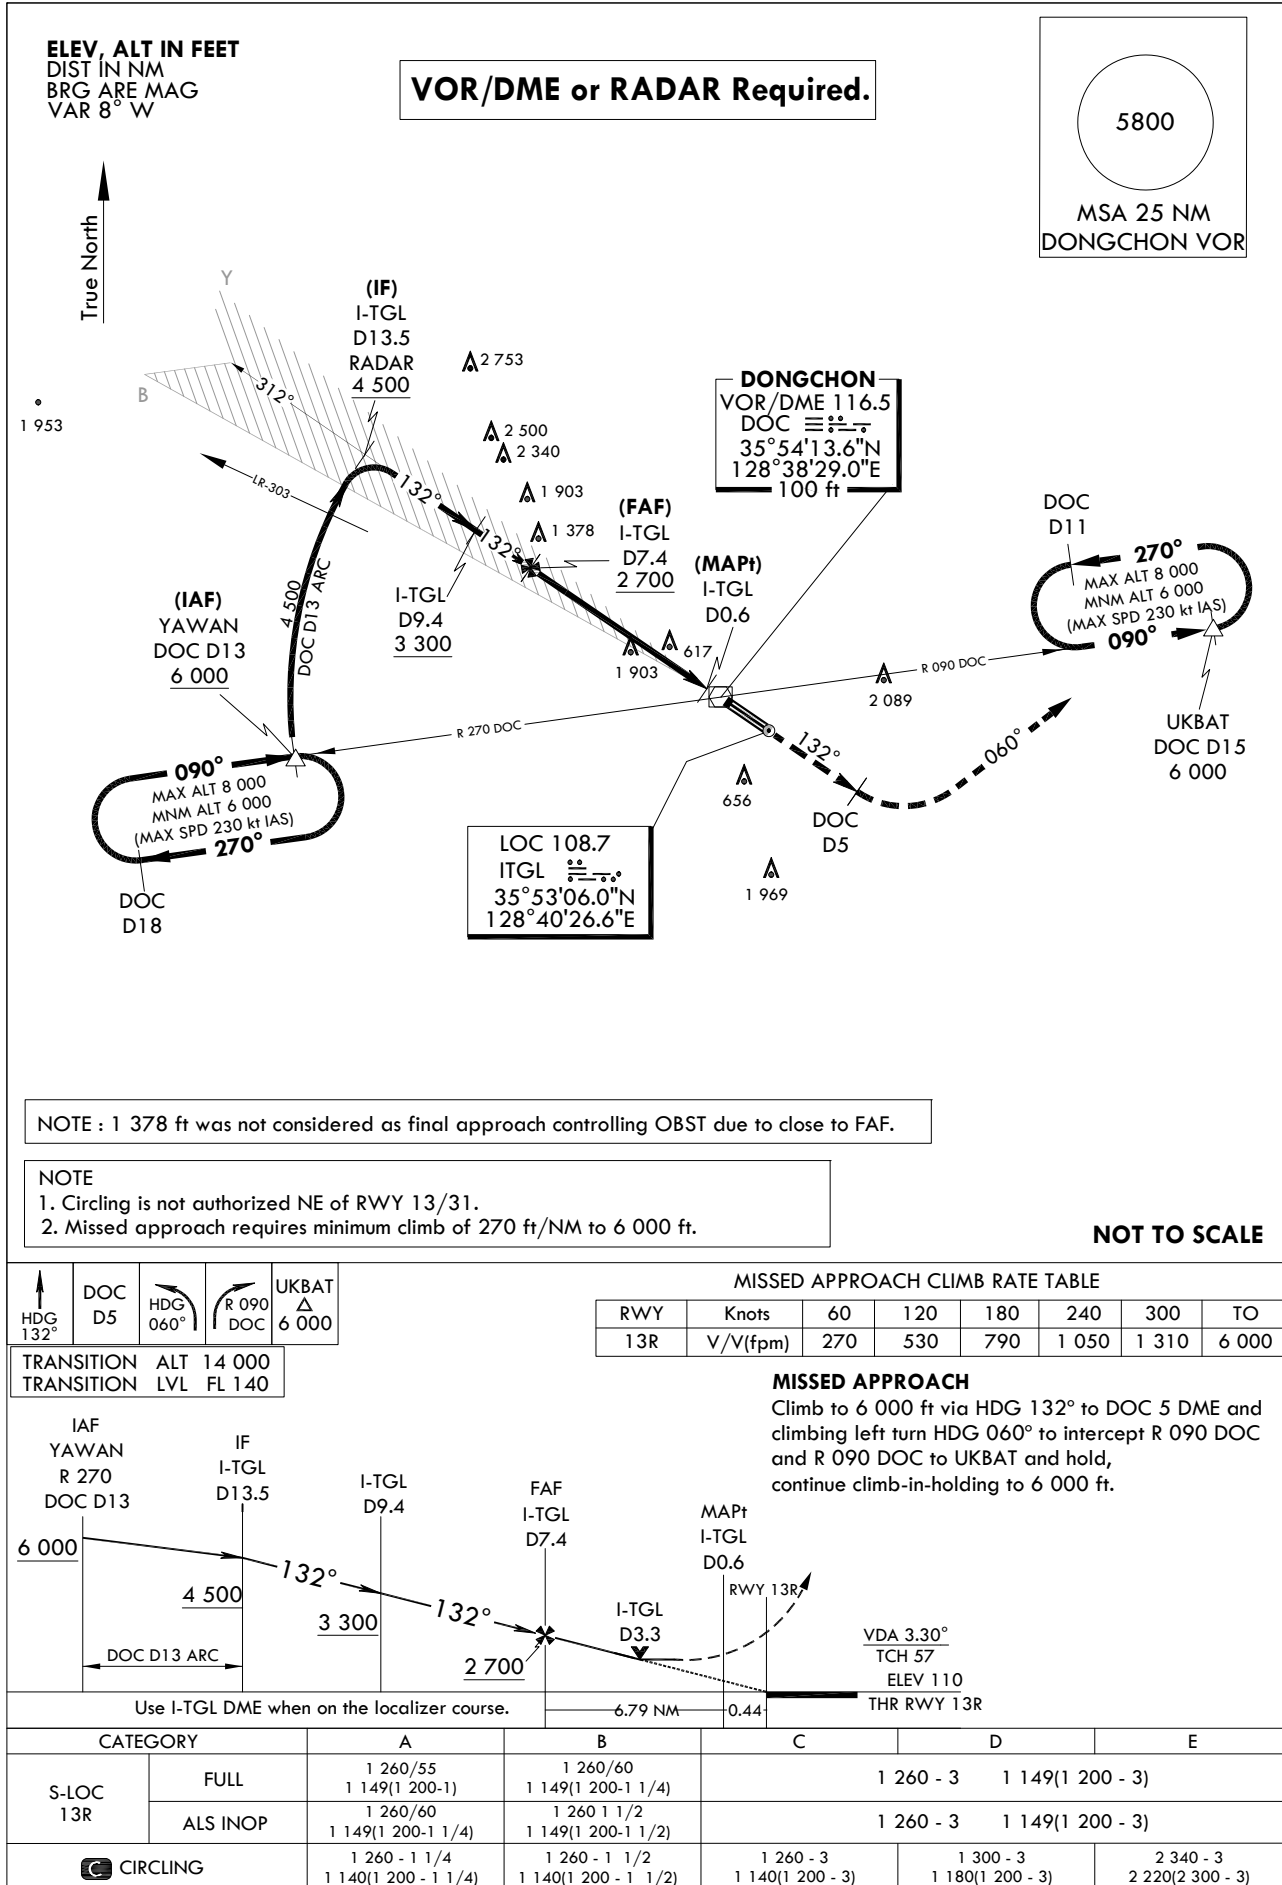

Change : Amended chart symbols.

INTENTIONALLY

LEFT

BLANK

**INSTRUMENT
APPROACH
CHART**



AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 13R - ELEV 110 ft
HEIGHTS ELEV TDZ 111 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

DAEGU/Daegu Intl(RKTN)

**RNP
RWY 13R**

Note : Approach and circle to land under U.S. TERPS.

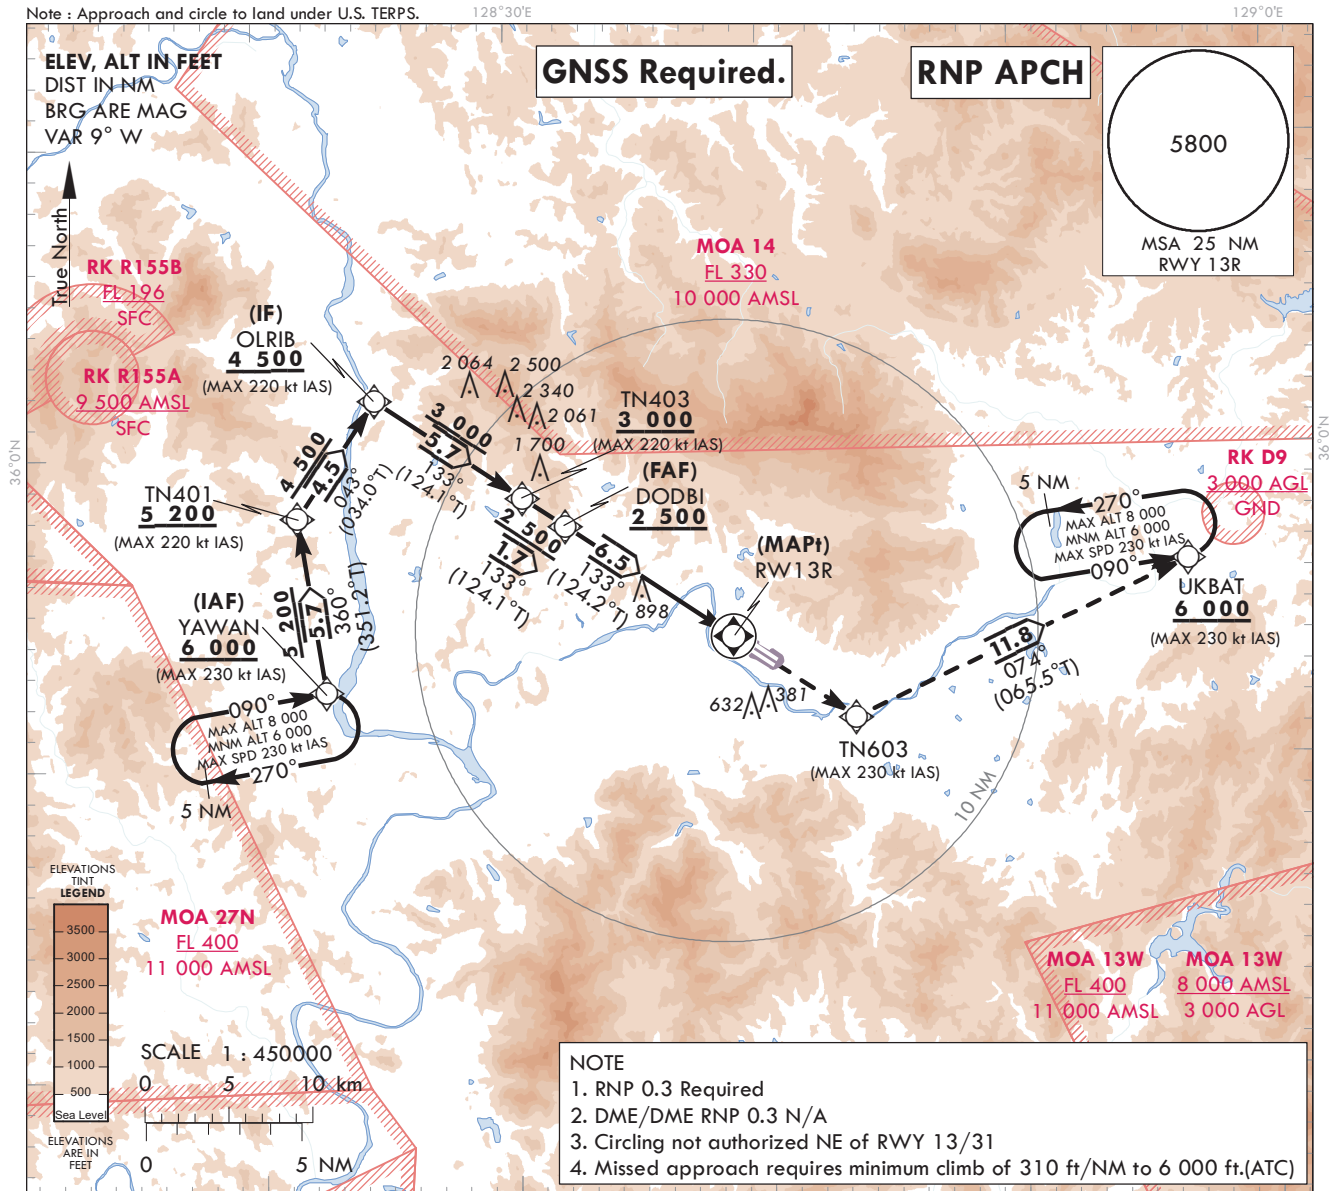


MISSSED APPROACH CLIMB RATE TABLE

RWY	Knots	60	120	180	240	300	TO
13R	V/V(fpm)	310	620	930	1 240	1 550	6 000

MISSSED APPROACH

Climb to 6 000 ft on direct to TN603 and track 074° to cross UKBAT at or above 6 000 ft and hold.

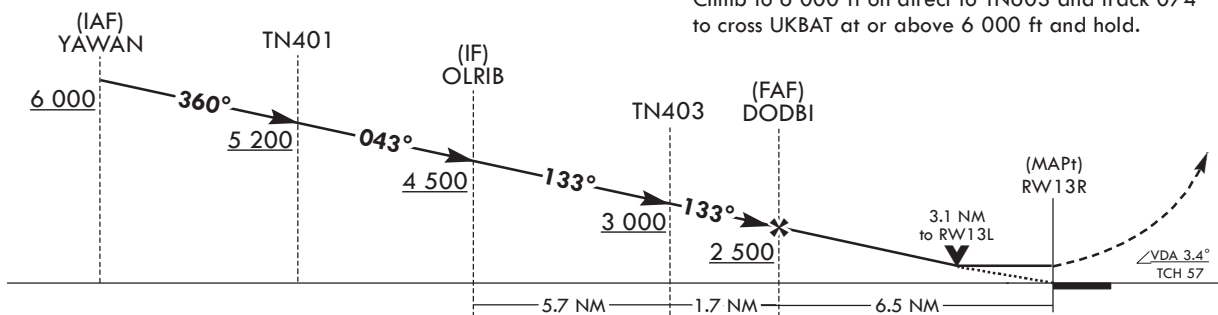

CATEGORY		A	B	C	D
LNAV/VNAV DA	ALS				N/A
	ALS INOP				N/A
LNAV MDA	ALS		1 260 - 3	1 149(1 200 - 3)	
	ALS INOP		1 260 - 3	1 149(1 200 - 3)	
CIRCLING			1 260 - 3	1 140(1 200 - 3)	

Change : Amended chart symbol.

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 13R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	YAWAN	-	-	-	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNP APCH	IAF
002	TF	TN401	-	360(351.2)	5.7	-	+5 200	-220	35°58'02.1"N 128°21'34.0"E	-	RNP APCH	-
003	TF	OLRIB	-	043(034.0)	4.5	-	+4 500	-220	36°01'47.4"N 128°24'41.4"E	-	RNP APCH	IF
004	TF	TN403	-	133(124.1)	5.7	-	+3 000	-220	35°58'36.2"N 128°30'28.8"E	-	RNP APCH	-
005	TF	DODBI	-	133(124.1)	1.7	-	+2 500	-	35°57'40.4"N 128°32'10.1"E	-	RNP APCH	FAF
006	TF	RW13R	Y	133(124.2)	6.5	-	-	-230	35°54'02.2"N 128°38'45.1"E	-	RNP APCH	MAPt
007	DF	TN603	-	-	-	-	-	-230	35°51'22.9"N 128°43'32.6"E	-	RNP APCH	CG310 ft/NM to 6 000
008	TF	UKBAT	-	074(065.5)	11.8	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	-
009	HM	UKBAT	-	090(081.3)	-	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	5 NM (Outbound timing)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNP RWY 13R	HM	YAWAN	-	090(081.3)	5.0	R	-8 000 +6 000	-230	35°02'09.4"N 127°44'21.6"E	-	RNAV 1	-

**INSTRUMENT
APPROACH
CHART**


AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 13L - ELEV 112 ft
HEIGHTS ELEV TDZ 112 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0


DAEGU/Daegu Intl(RKTN)

**RNP
RWY 13L**

Note : Approach and circle to land under U.S. TERPS.

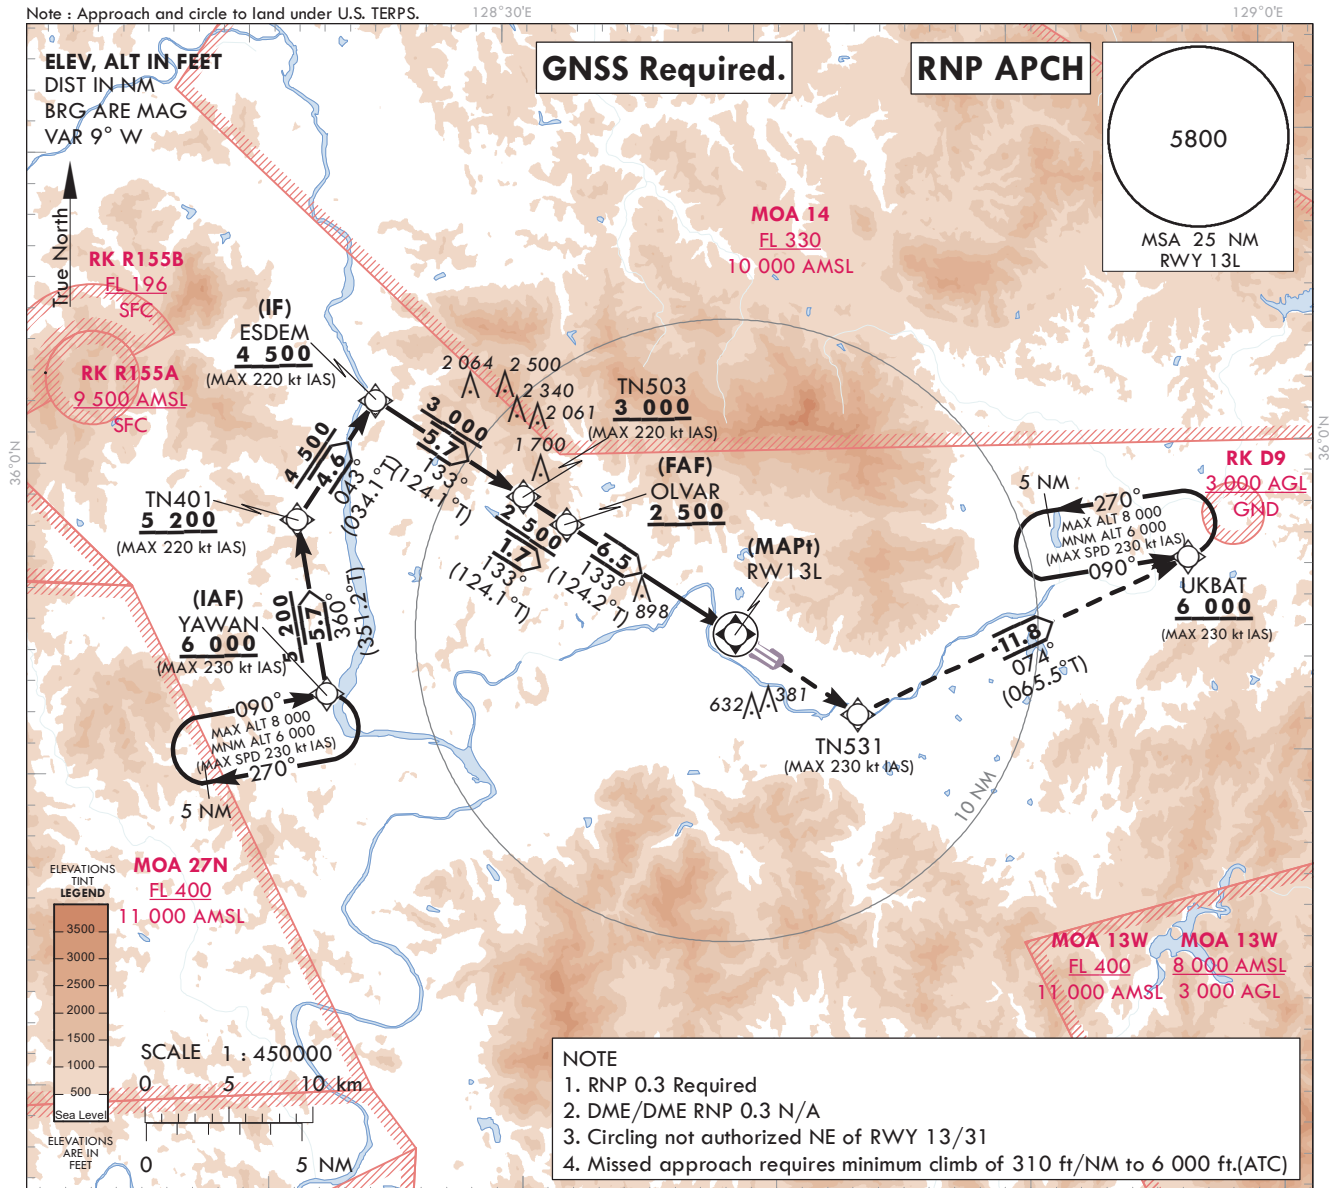

TN531	TN531		UKBAT	128°30'E										129°0'E														
		 tr 074°	 6 000	TRANSITION ALT 14 000 TRANSITION LVL FL 140										MISSED APPROACH CLIMB RATE TABLE														
			<table><tr><th>RWY</th><th>Knots</th><th>60</th><th>120</th><th>180</th><th>240</th><th>300</th><th>TO</th></tr><tr><td>13L</td><td>V/V(fpm)</td><td>310</td><td>620</td><td>930</td><td>1 240</td><td>1 550</td><td>6 000</td></tr></table>											RWY	Knots	60	120	180	240	300	TO	13L	V/V(fpm)	310	620	930	1 240	1 550
RWY	Knots	60	120	180	240	300	TO																					
13L	V/V(fpm)	310	620	930	1 240	1 550	6 000																					

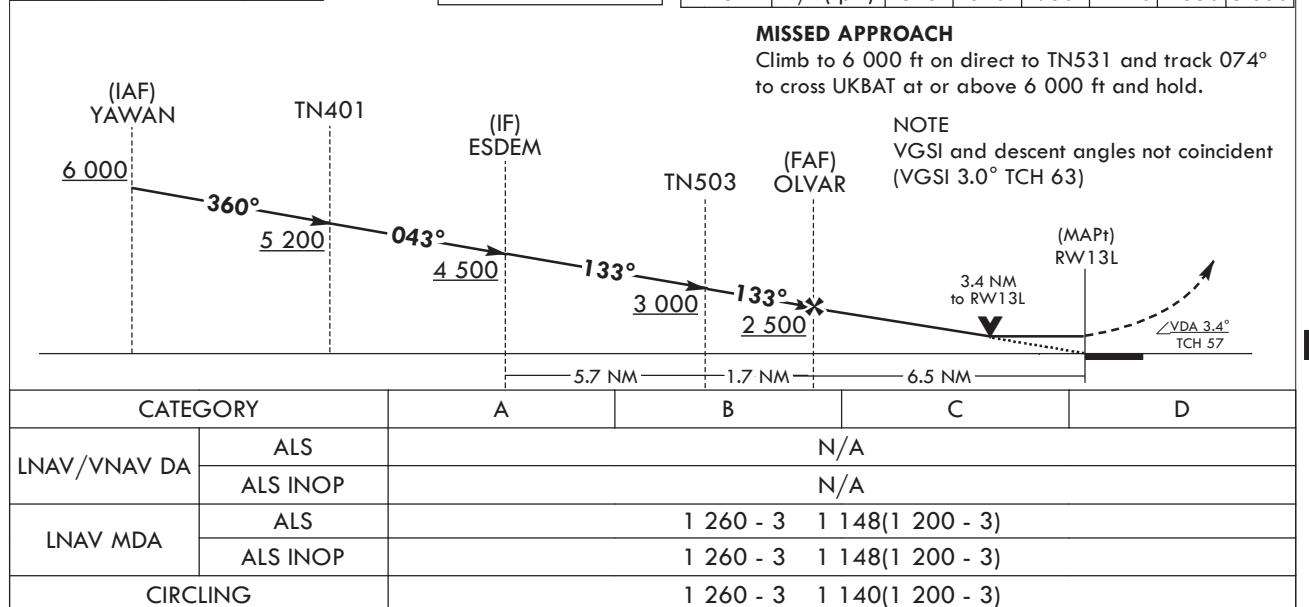

Change : Amended chart symbol.

Instrument Approach Procedure Coding Tables

RNP RWY 13L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over % ⁽¹⁾	Course/Track	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	YAWAN	-	-	-	-	+6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNP APCH	IAF
002	TF	TN401	-	360(351.2)	5.7	-	+5 200	-220	35°58'02.1"N 128°21'34.0"E	-	RNP APCH	-
003	TF	ESDEW	-	043(034.1)	4.6	-	+4 500	-220	36°01'50.8"N 128°24'44.3"E	-	RNP APCH	IF
004	TF	TN503	-	133(124.1)	5.7	-	+3 000	-220	35°58'39.4"N 128°30'32.1"E	-	RNP APCH	-
005	TF	OLVAR	-	133(124.1)	1.7	-	+2 500	-	35°57'43.3"N 128°32'13.8"E	-	RNP APCH	FAF
006	TF	RW13L	Y	133(124.2)	6.5	-	-	-230	35°54'05.4"N 128°38'48.4"E	-	RNP APCH	MAPt
007	DF	TN531	-	-	-	-	-	-230	35°51'26.2"N 128°43'35.7"E	-	RNP APCH	CG310 ft/NM to 6 000
008	TF	UKBAT	-	074(065.5)	11.8	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	-
009	HM	UKBAT	-	090(081.3)	-	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	5 NM (Outbound timing)

HOLDING PROCEDURE

Holding identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
PNP RWY 13L	HM	YAWAN	-	090(081.3)	5.0	R	-8 000 +6 000	-230	35°52'24.8"N 128°22'38.0"E	-	RNAV	-


**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31L - ELEV 118 ft
HIGHEST ELEV TDZ 118 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

DAEGU/Daegu Intl(RKTN)
ILS
RWY 31L


Note : Approach and circle to land under U.S. TERPS.

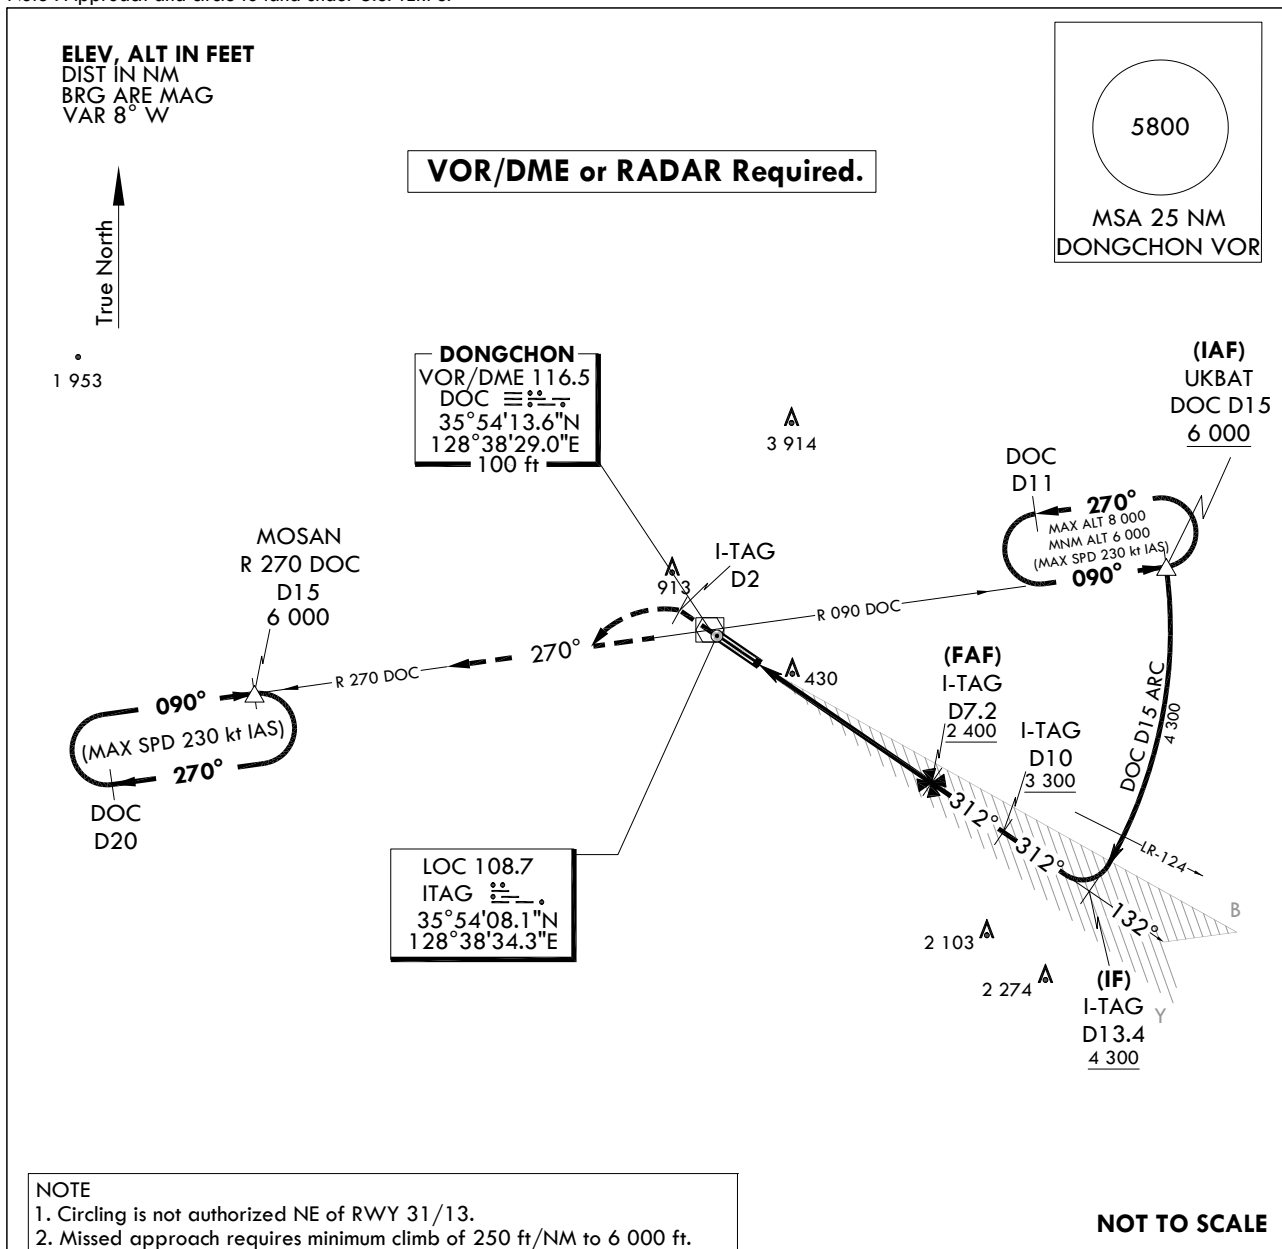

RWY	Knots	MISSED APPROACH CLIMB RATE TABLE					
		60	120	180	240	300	TO
31L	V/V(fpm)	250	500	750	1 000	1 250	6 000

MISSED APPROACH

Climb to 6 000 ft via HDG 312° to I-TAG 2 DME and climbing left turn to intercept R 270 DOC and R 270 DOC to MOSAN and hold, continue climb-in-holding to 6 000 ft.

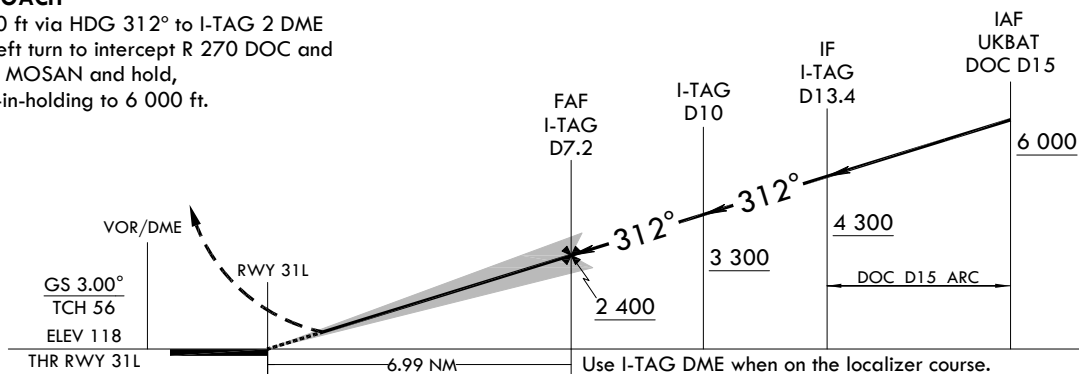

CATEGORY		A	B	C	D
S-ILS 31L	FULL		318 / 24	200(200 - 1/2)	
	ALS INOP		318 / 40	200(200 - 3/4)	

Change : Amended chart symbols.

INTENTIONALLY

LEFT

BLANK


**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31L - ELEV 118 ft
HIGHEST ELEV TDZ 118 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

**DAEGU/Daegu Intl(RKTN)
LOC/DME
RWY 31L**


Note : Approach and circle to land under U.S. TERPS.

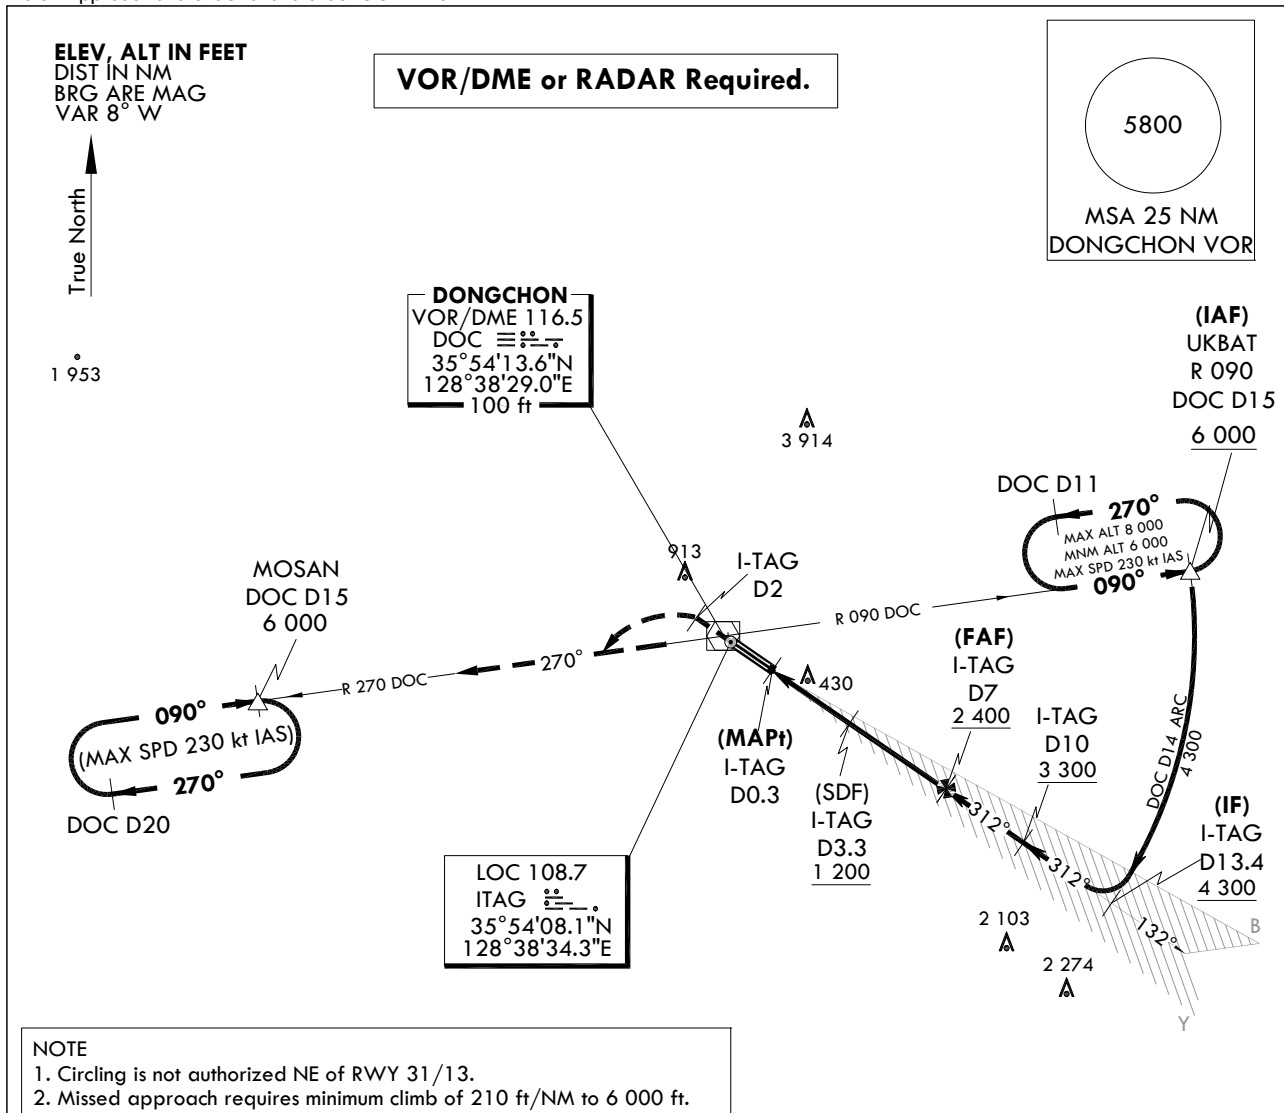

NOT TO SCALE

MISSED APPROACH CLIMB RATE TABLE

RWY	Knots	60	120	180	240	To
31L	V/V(fpm)	210	420	630	840	6 000

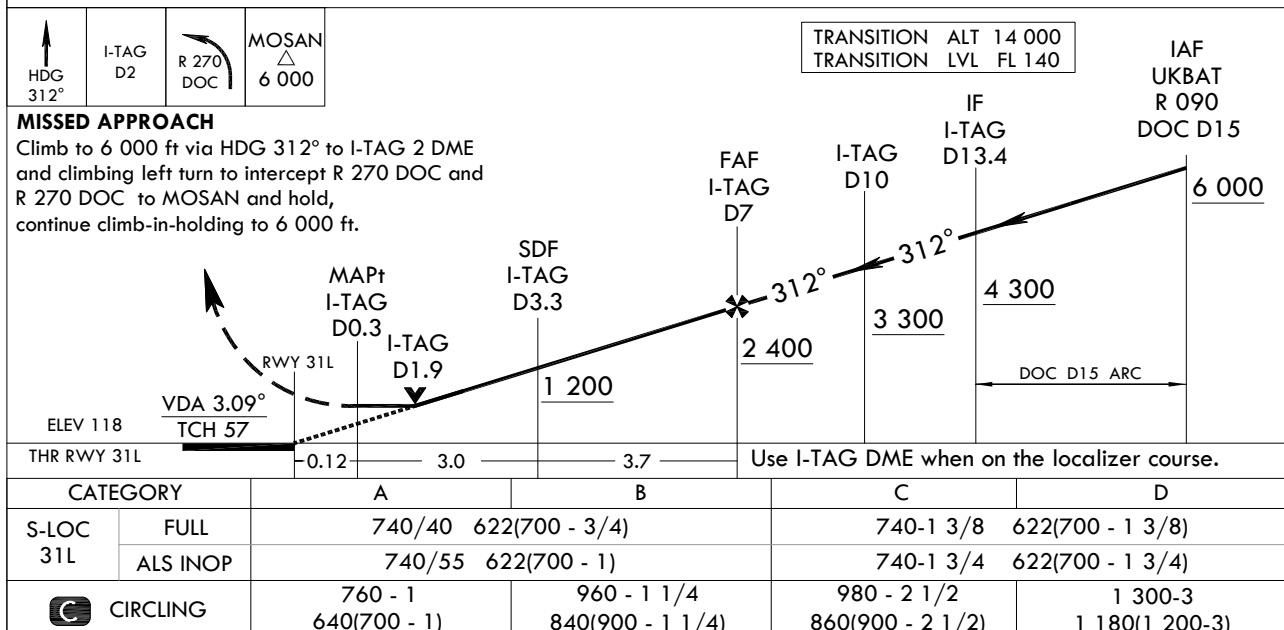

Change : Amended chart symbols.

INTENTIONALLY

LEFT

BLANK


**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120ft
HEIGHTS RELATED TO
THR RWY 31L - ELEV 118 ft
HEIGHTS ELEV TDZ 118 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

DAEGU/Daegu Intl(RKTN)
RNP
RWY 31L

Note : Approach and circle to land under U.S. TERPS.

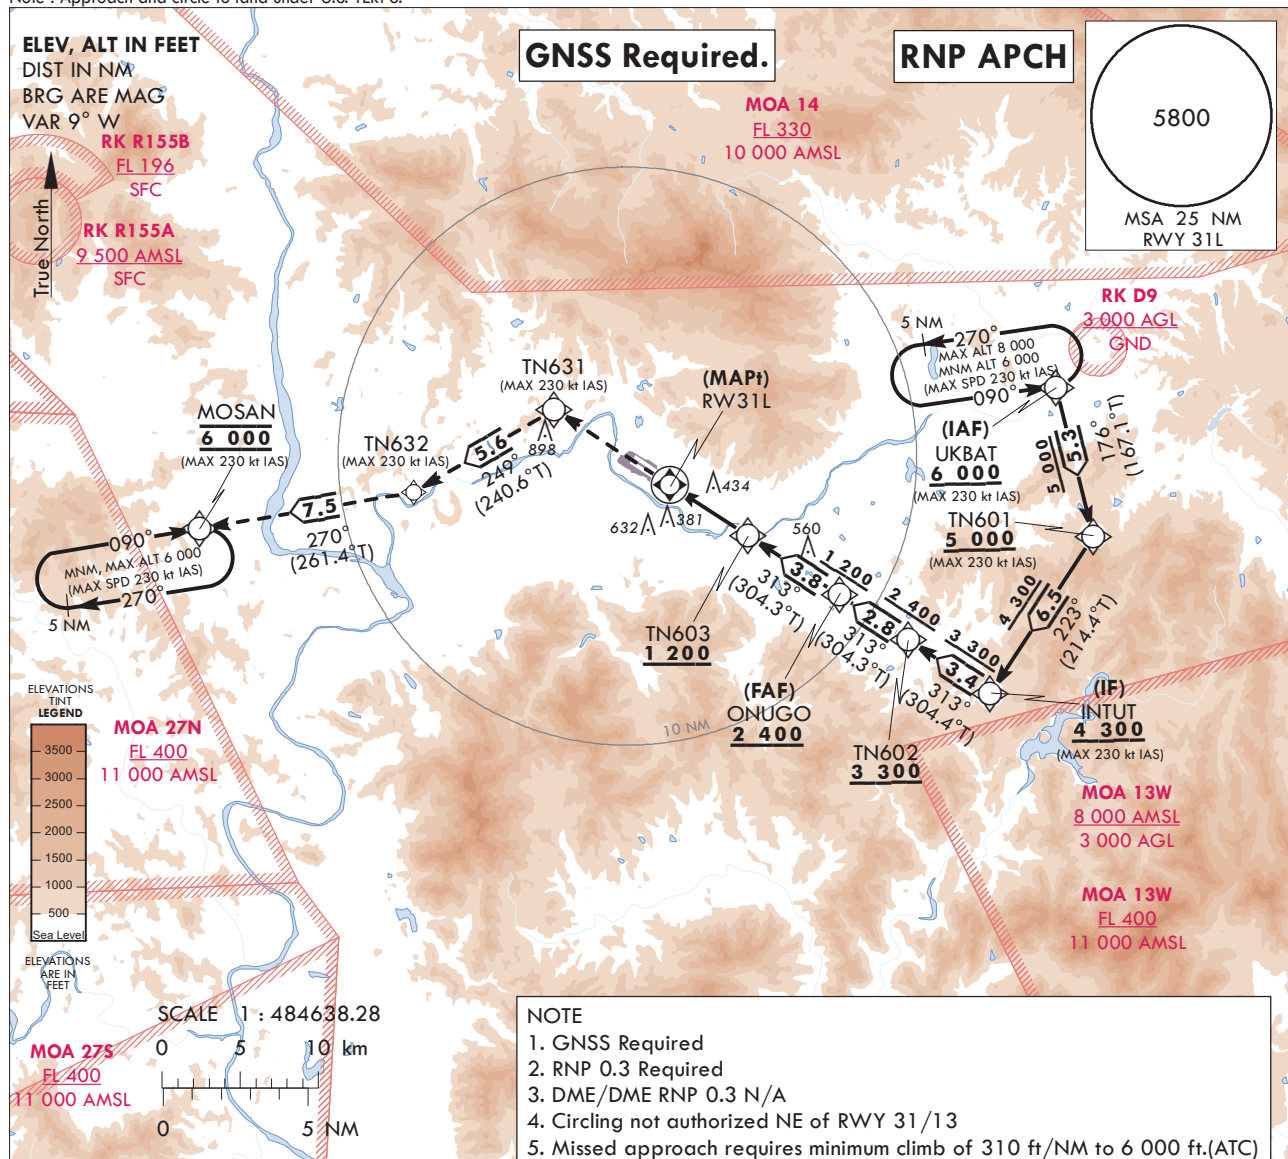


TN631	TN631	TN632	6000	MOSAN
↑	◇	◇	↑	△
	tr 249°		tr 270°	6 000

MISSED APPROACH CLIMB RATE TABLE						
RWY	KNOTS	60	120	180	240	300
31L	V/V(fpm)	310	620	930	1 240	1 550
						6 000

MISSED APPROACH

Climb to 6 000 ft on direct to TN631 and track 249° to TN632 and track 270° to cross MOSAN at 6 000 ft and hold.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

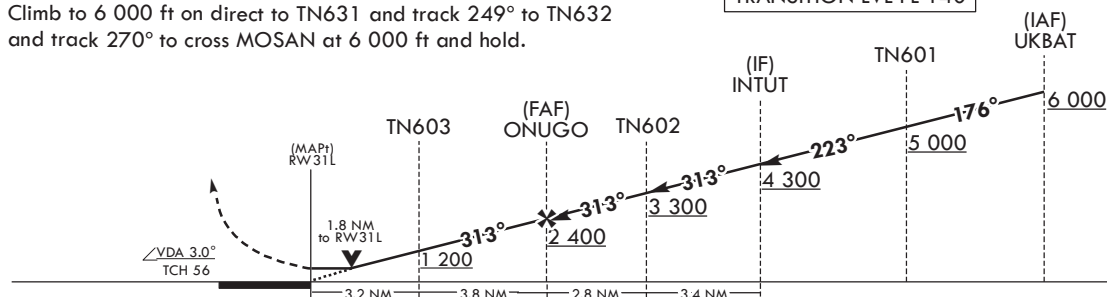

CATEGORY		A	B	C	D
LNAV/VNAV DA	ALS				N/A
	ALS INOP				N/A
LNAV MDA	ALS		760-1 3/8	642(700-1 3/8)	
	ALS INOP		760-1 7/8	642(700-1 7/8)	
CIRCLING		760-1 7/8 640(700-1 7/8)	1 000-1 7/8 880(900-1 7/8)	1 000-2 1/2 880(900-2 1/2)	1 260-3 1 140(1 200-3)

Change : Amended chart symbol.

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 31L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	UKBAT	-	-	-	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	IAF
002	TF	TN601	-	176(167.1)	5.3	-	+5 000	-230	35°51'06.5"N 128°58'12.6"E	-	RNP APCH	-
003	TF	INTUT	-	223(214.4)	6.5	-	+4 300	-230	35°45'44.2"N 128°53'41.8"E	-	RNP APCH	IF
004	TF	TN602	-	313(304.3)	3.4	-	+3 300	-230	35°47'39.4"N 128°50'14.8"E	-	RNP APCH	-
005	TF	ONUGO	-	313(304.3)	2.8	-	+2 400	-230	35°49'15.4"N 128°47'22.3"E	-	RNP APCH	FAF
006	TF	TN603	-	313(304.3)	3.8	-	+1 200	-	35°51'22.9"N 128°43'32.6"E	-	RNP APCH	-
007	TF	RW31L	Y	313(304.3)	3.2	-	-	-	35°53'11.9"N 128°40'15.9"E	-	RNP APCH	MAPt
008	DF	TN631	-	-	-	-	-	-230	35°55'53.2"N 128°35'24.2"E	-	RNP APCH	CG310 ft/NM to 6 000
009	TF	TN632	-	249(240.6)	5.6	-	-	-230	35°53'06.4"N 128°29'21.3"E	-	RNP APCH	-
010	TF	MOSAN	-	270(261.4)	7.5	-	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	-
011	HM	MOSAN	-	090(081.3)	-	R	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	5 NM (Outbound timing)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNP RWY 31L	HM	UKBAT	-	090(081.3)	5.0	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	-


**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31L - ELEV 118 ft
HIGHEST ELEV TDZ 118 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

**DAEGU/Daegu Intl(RKTN)
VOR/DME
RWY 31L**

Note : Approach and circle to land under U.S. TERPS.

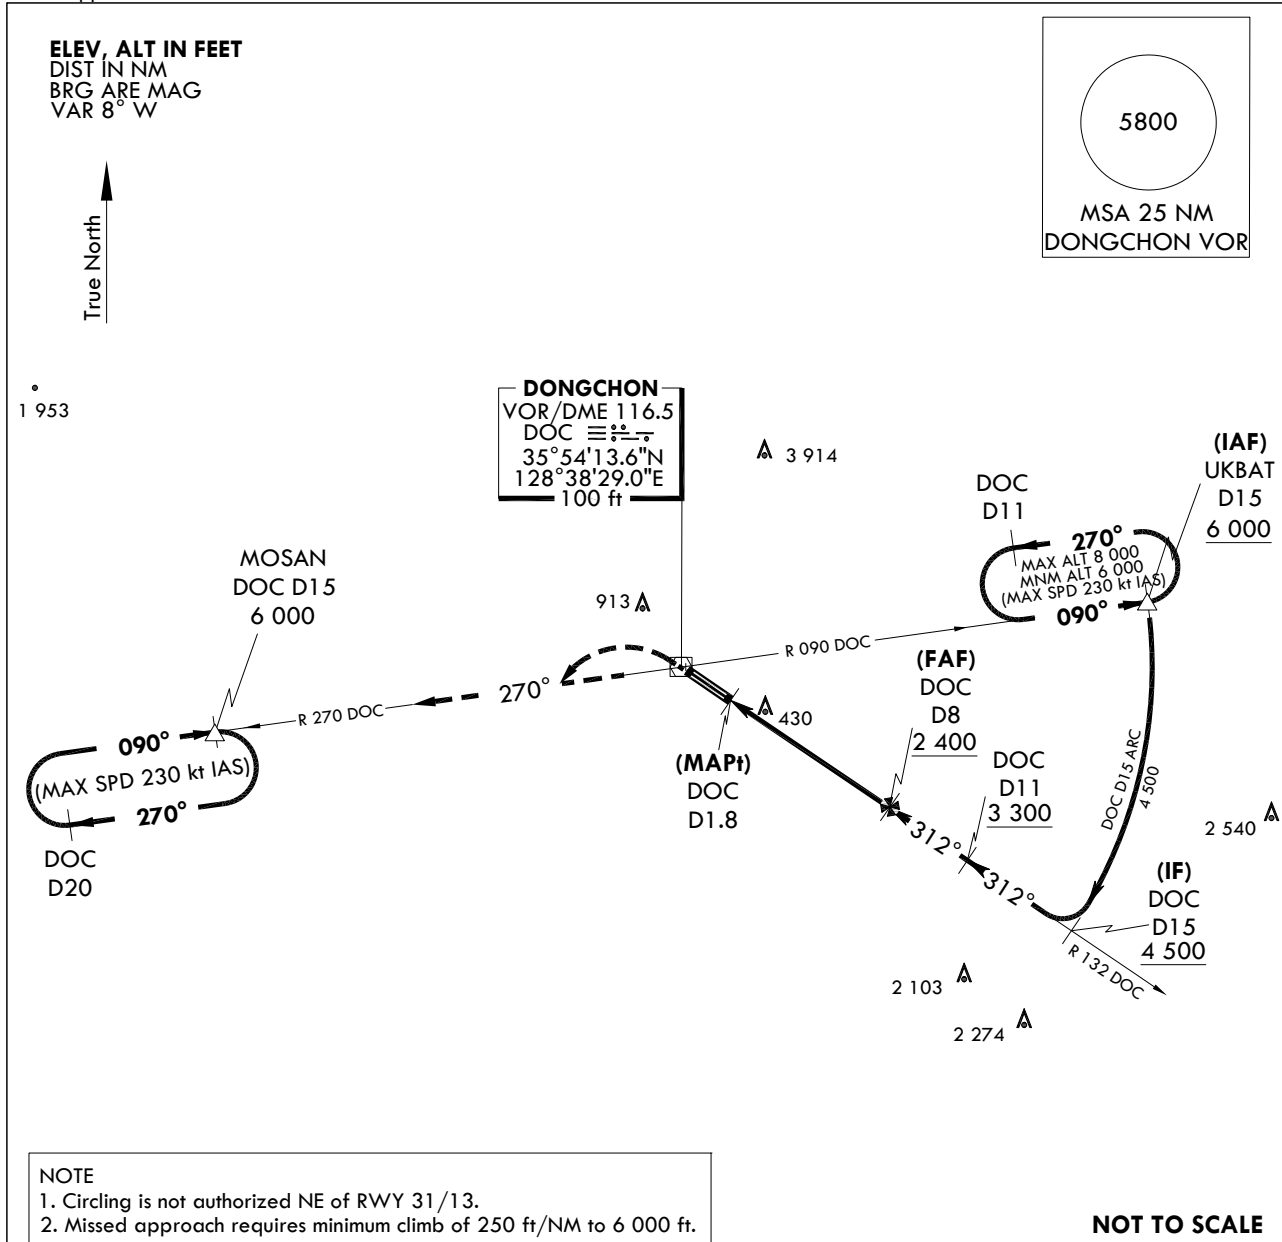


RWY	Knots	60	120	180	240	300	TO
31L	V/V(fpm)	250	470	700	930	1 160	6 000

MISSED APPROACH

Climb to 6 000 ft via direct to DOC and climbing left turn to intercept R 270 DOC and R 270 DOC to MOSAN and hold, continue climb-in-holding to 6 000 ft.

NOTE : VGSI and descent angles not coincident
(VGSI Angle 3.00°/TCH 57).

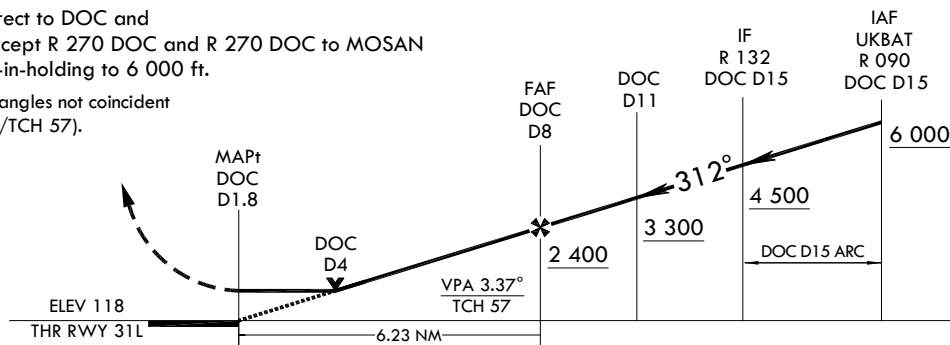

CATEGORY	A	B	C	D
S-VOR 31L	FULL 880/40 762(800 - 3/4)		880-1 3/4 762(800-1 3/4)	
	ALS INOP 880/55 762(800 - 1)		880-2 1/2 762(800-2 1/2)	
CIRCLING	880 - 1 760(800 - 1)	960 - 1 1/4 840(900 - 1 1/4)	980 - 2 1/2 860(900 - 2 1/2)	1 300-3 1 180(1 200-3)

Change : Amended chart symbol.


INTENTIONALLY

LEFT

BLANK

INSTRUMENT
APPROACH
CHARTAERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV 120 ft
HIGHEST ELEV TDZ 120 ftDAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0DAEGU/Daegu Intl(RKTN)
LOC/DME
RWY 31R

Note : Approach and circle to land under U.S. TERPS.

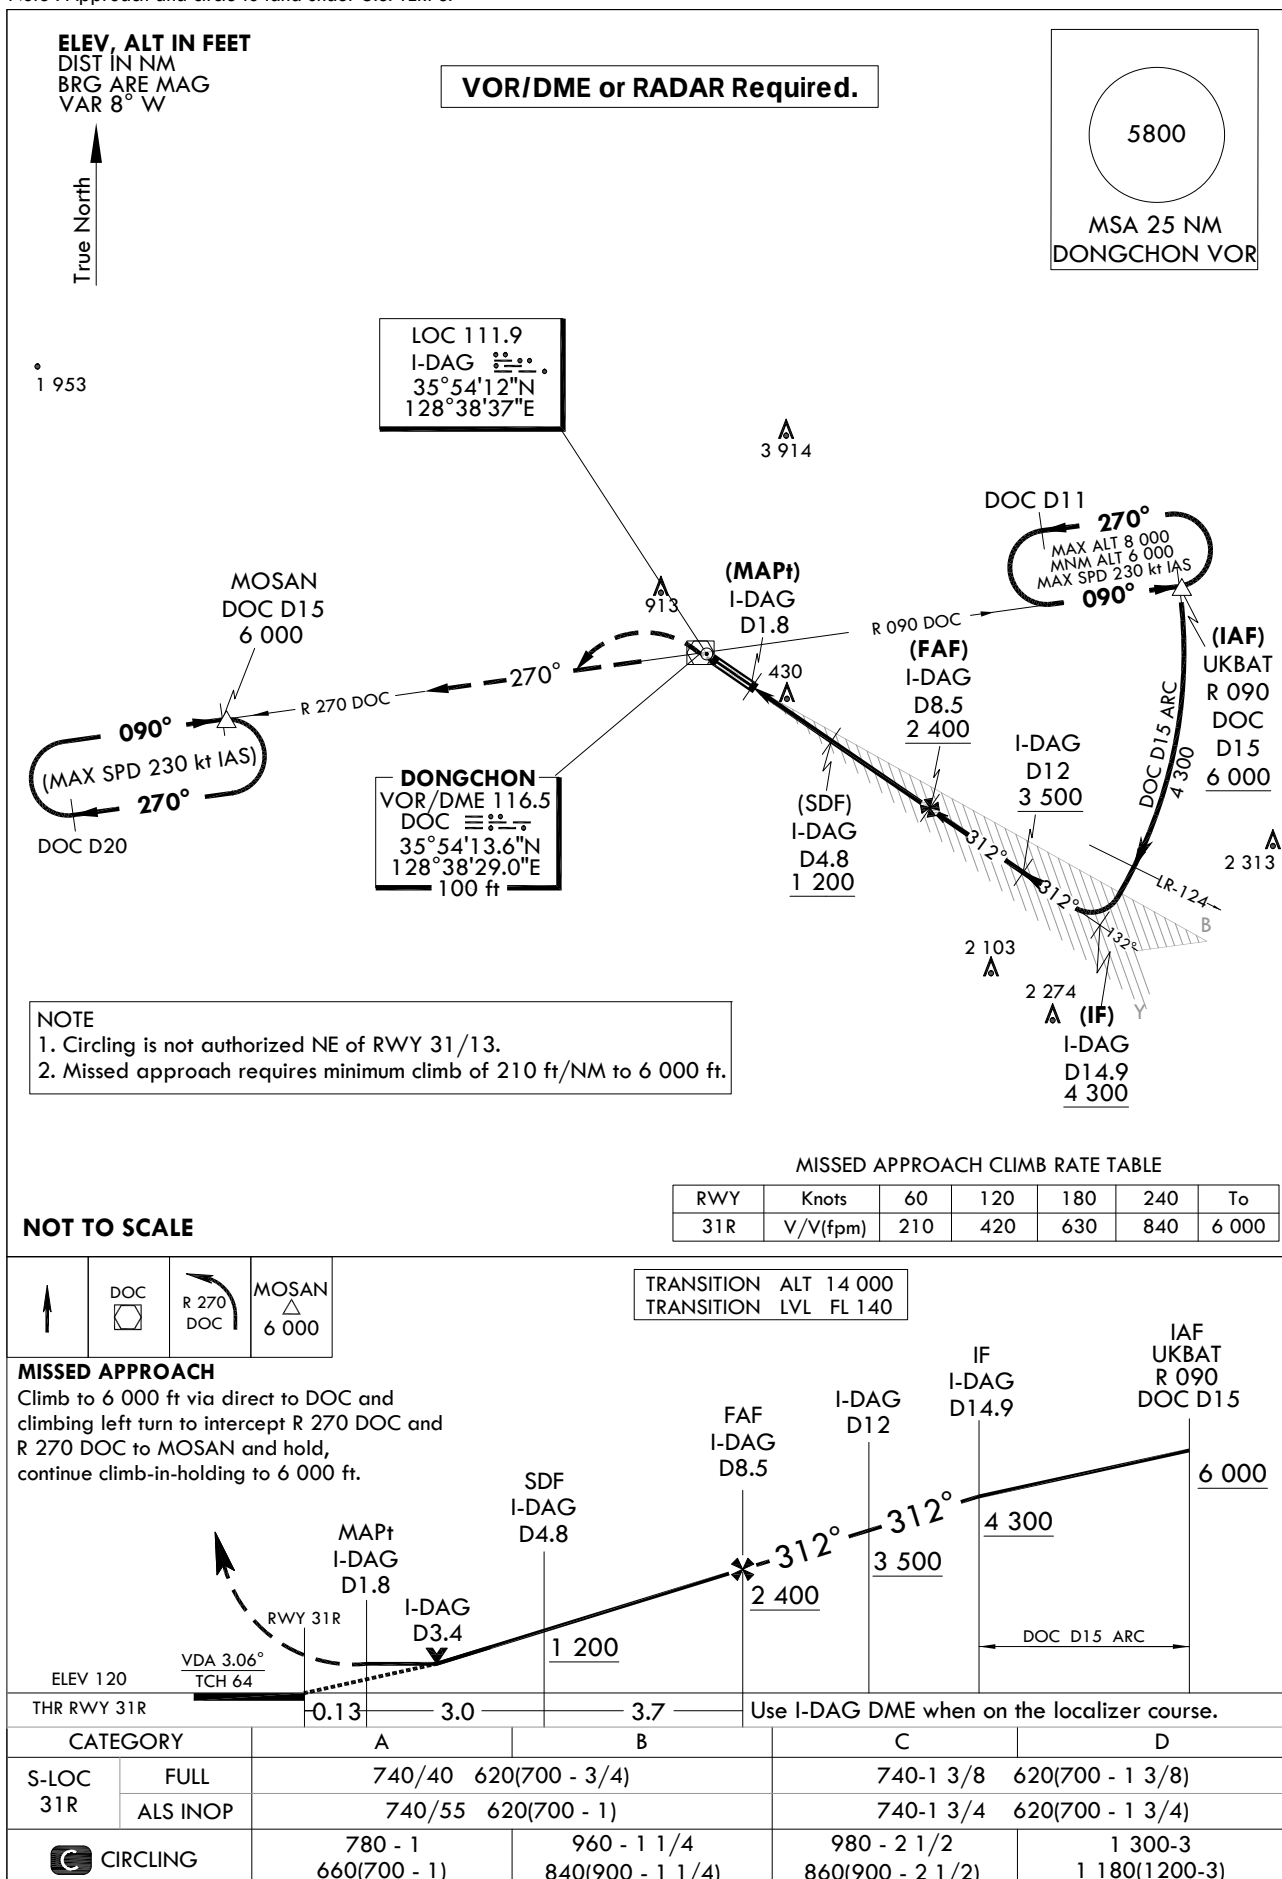

Change : Amended chart symbols.

INTENTIONALLY

LEFT

BLANK


**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV 120 ft
HEIGHTS ELEV TDZ 120 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

DAEGU/Daegu Intl(RKTN)
RNP
RWY 31R

Note : Approach and circle to land under U.S. TERPS.

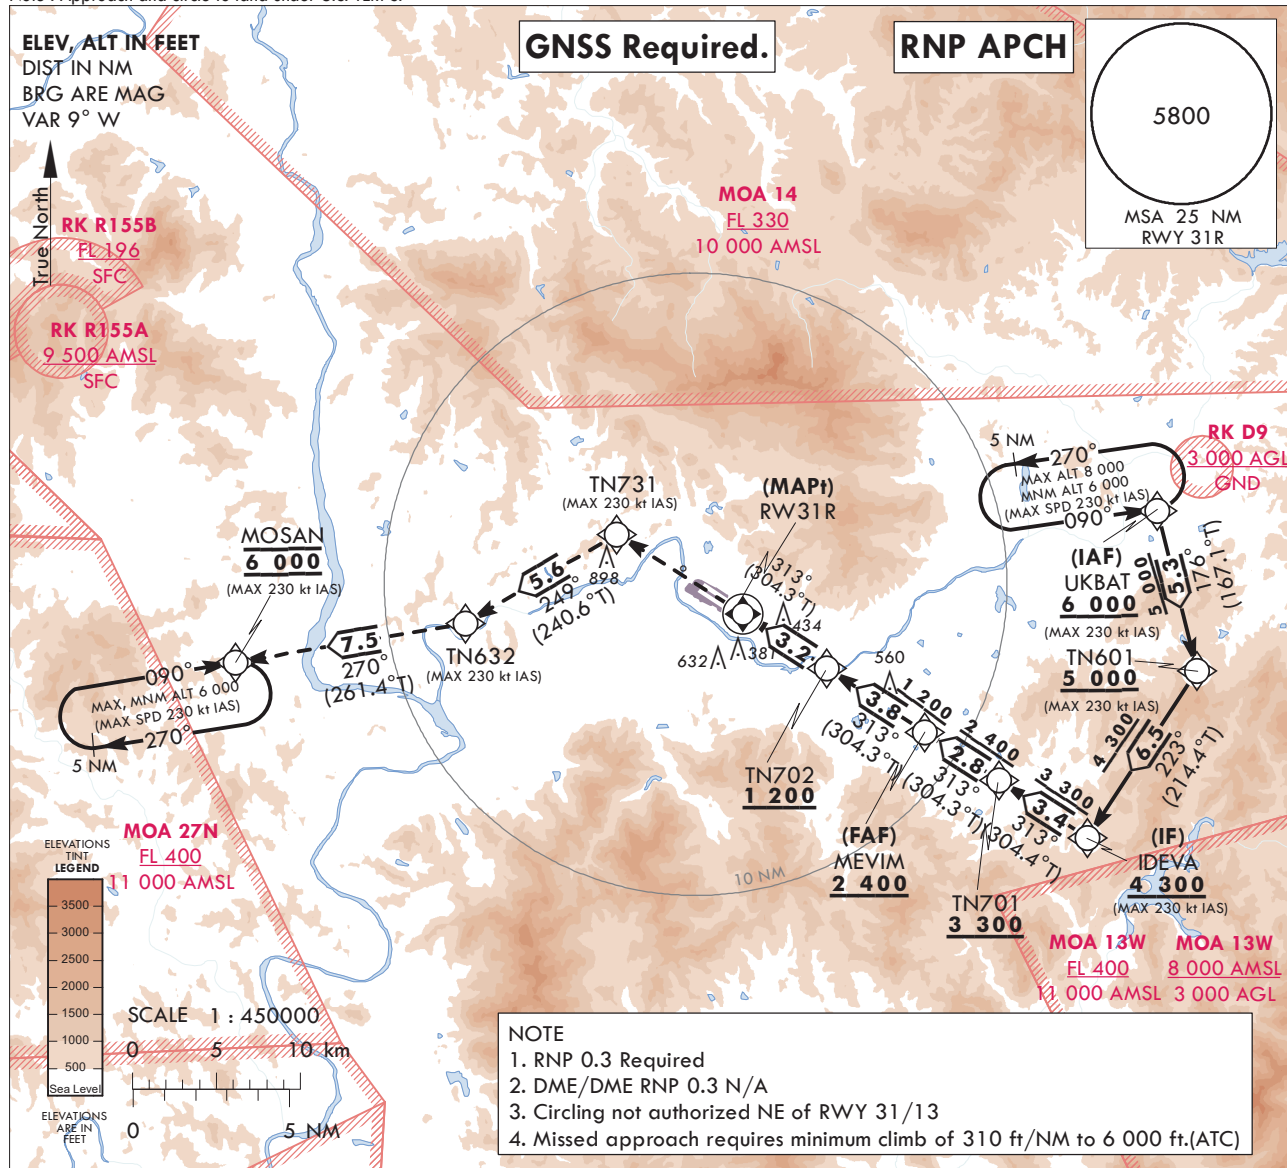

TN731	TN731	↑	TN632	6000	MOSAN
↑	◇	tr 249°	◇	↑	△
				tr 270°	6 000


MISSED APPROACH CLIMB RATE TABLE

RWY	KNOTS	60	120	180	240	300	TO
31R	V/V(fpm)	310	620	930	1 240	1 550	6 000

MISSED APPROACH

Climb to 6 000 ft on direct to TN731 and track 249° to TN632 and track 270° to cross MOSAN at 6 000 ft and hold.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

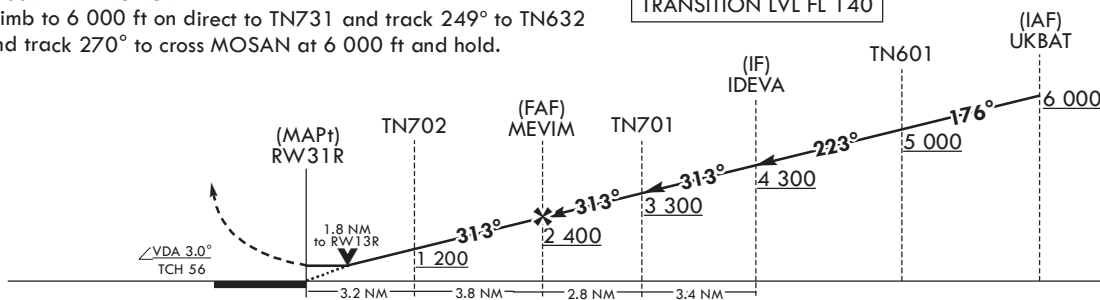

CATEGORY		A	B	C	D
LNAV/VNAV DA	ALS	N/A			
	ALS INOP	N/A			
LNAV MDA	ALS	760-1 3/8 640(700-1 3/8)			
	ALS INOP	760-1 3/4 640(700-1 3/4)			
CIRCLING		760-1 3/4 640(700-1 3/4)	1 000-1 3/4 880(900-1 3/4)	1 000-2 1/2 880(900-2 1/2)	1 260-3 1 140(1 200-3)

Change : Amended chart symbol.

Instrument Approach Procedure Coding Tables

RNP RWY 31R												
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	UKBAT	-	-	-	-	+6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNP APCH	IAF
002	TF	TN601	-	176(167.1)	5.3	-	+5 000	-230	35°51'06.5"N 128°58'12.6"E	-	RNP APCH	-
003	TF	IDEVA	-	223(214.4)	6.5	-	+4 300	-230	35°45'47.6"N 128°53'44.7"E	-	RNP APCH	IF
004	TF	TN701	-	313(304.4)	3.4	-	+3 300	-230	35°47'42.9"N 128°50'17.7"E	-	RNP APCH	-
005	TF	MEVIM	-	313(304.3)	2.8	-	+2 400	-230	35°49'18.8"N 128°47'25.2"E	-	RNP APCH	FAF
006	TF	TN702	-	313(304.3)	3.8	-	+1 200	-	35°51'26.4"N 128°43'35.4"E	-	RNP APCH	-
007	TF	RW31R	Y	313(304.3)	3.2	-	-	-	35°53'15.3"N 128°40'18.8"E	-	RNP APCH	MAPt
008	DF	TN731	-	-	-	-	-	-230	35°55'53.2"N 128°35'24.2"E	-	RNP APCH	CG310ft/NM to 6 000
009	TF	TN632	-	249(240.6)	5.6	-	-	-230	35°53'06.4"N 128°29'21.3"E	-	RNP APCH	-
010	TF	MOSAN	-	270(261.4)	7.5	-	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	-
011	HM	MOSAN	-	090(081.3)	-	R	@6 000	-230	35°51'58.4"N 128°20'14.0"E	-	RNP APCH	5 NM (Outbound limit)

HOLDING PROCEDURE												
Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNP RWY 31R	HM	UKBAT	-	090(081.3)	5.0	L	-8 000 +6 000	-230	35°56'16.5"N 128°56'47.1"E	-	RNAV 1	-



**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 120 ft
HEIGHTS RELATED TO
THR RWY 31R - ELEV 120 ft
HIGHEST ELEV TDZ 120 ft

DAEGU APP 135.9 346.3
DAEGU TWR 126.2 236.6
365.0

**DAEGU/Daegu Intl(RKTN)
VOR/DME
RWY 31R**

Note : Approach and circle to land under U.S. TERPS.

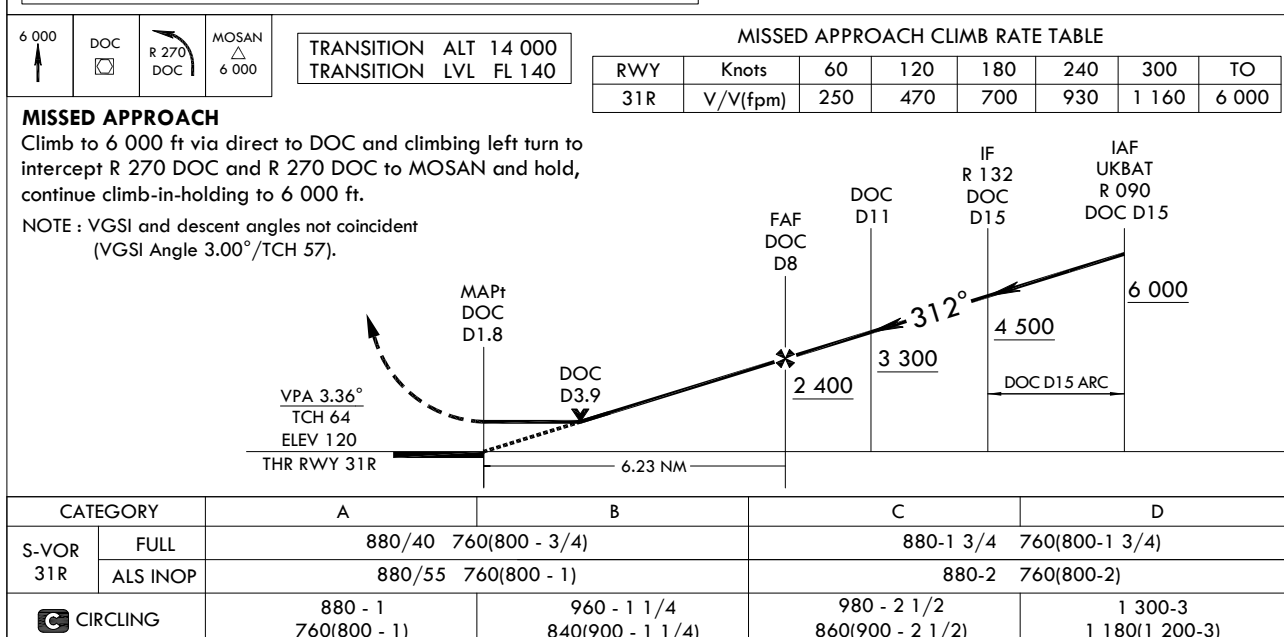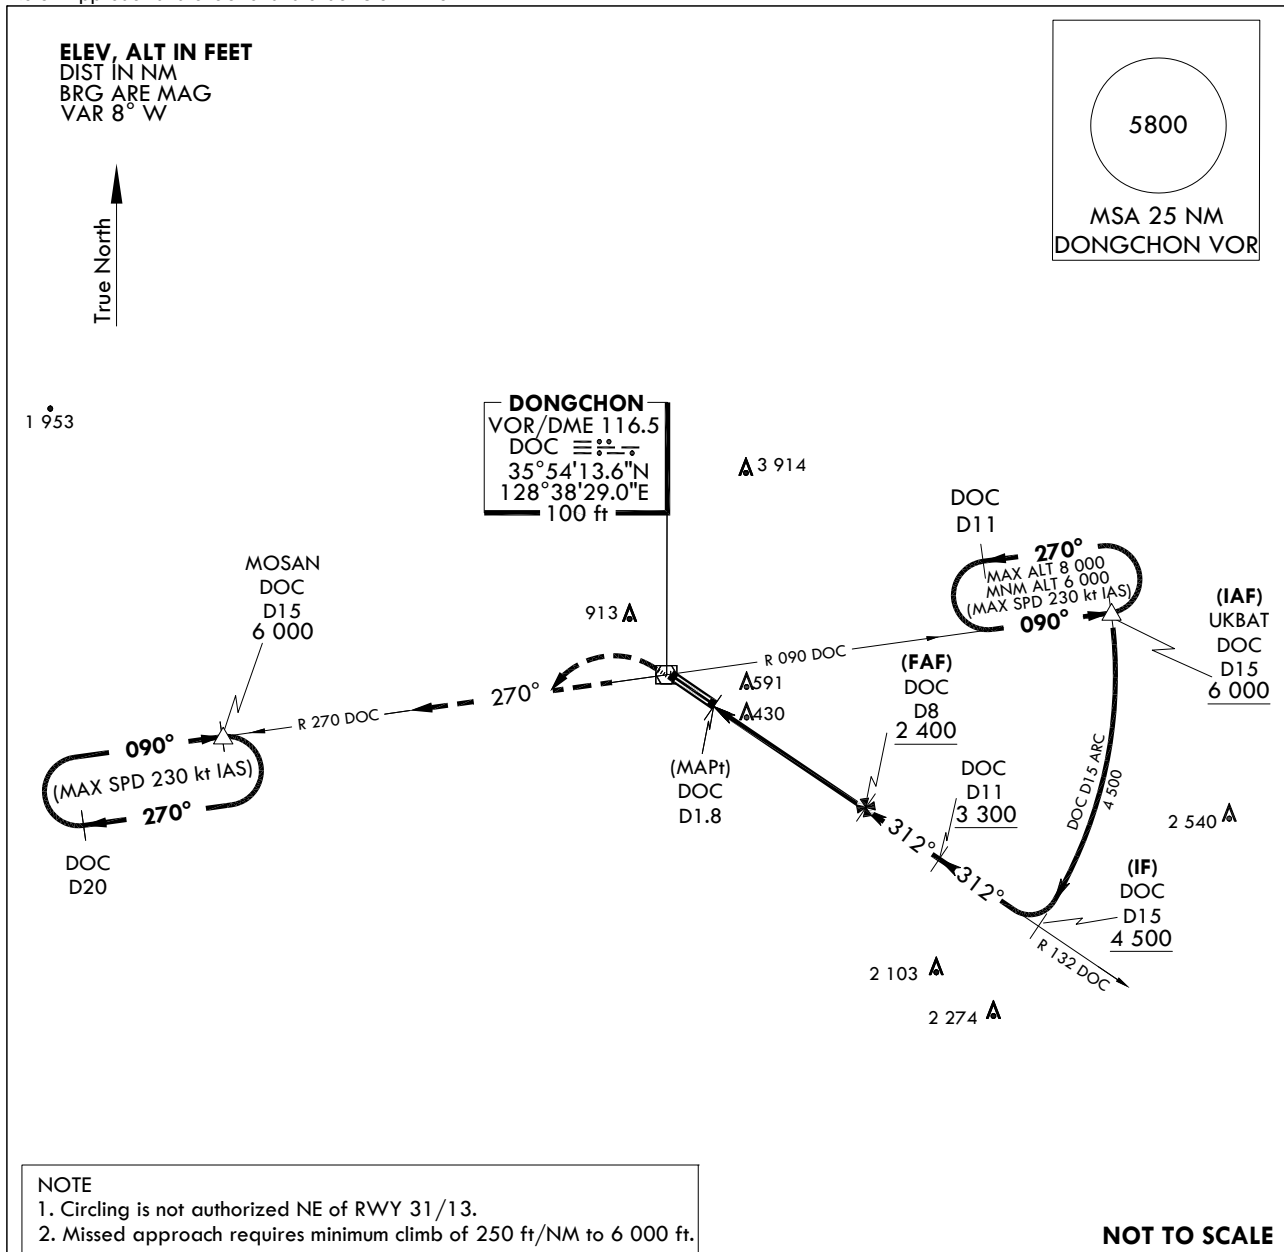

Change : Amended chart symbol.

INTENTIONALLY

LEFT

BLANK