


AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV **87 ft**

JEJU APP	121.2
	124.05
JEJU TWR	118.55
	118.2

JEJU/Jeju Intl(RKPC)
ILS Z or LOC Z RWY 07
CAT II

Note : Approach under ICAO Flight Procedure.

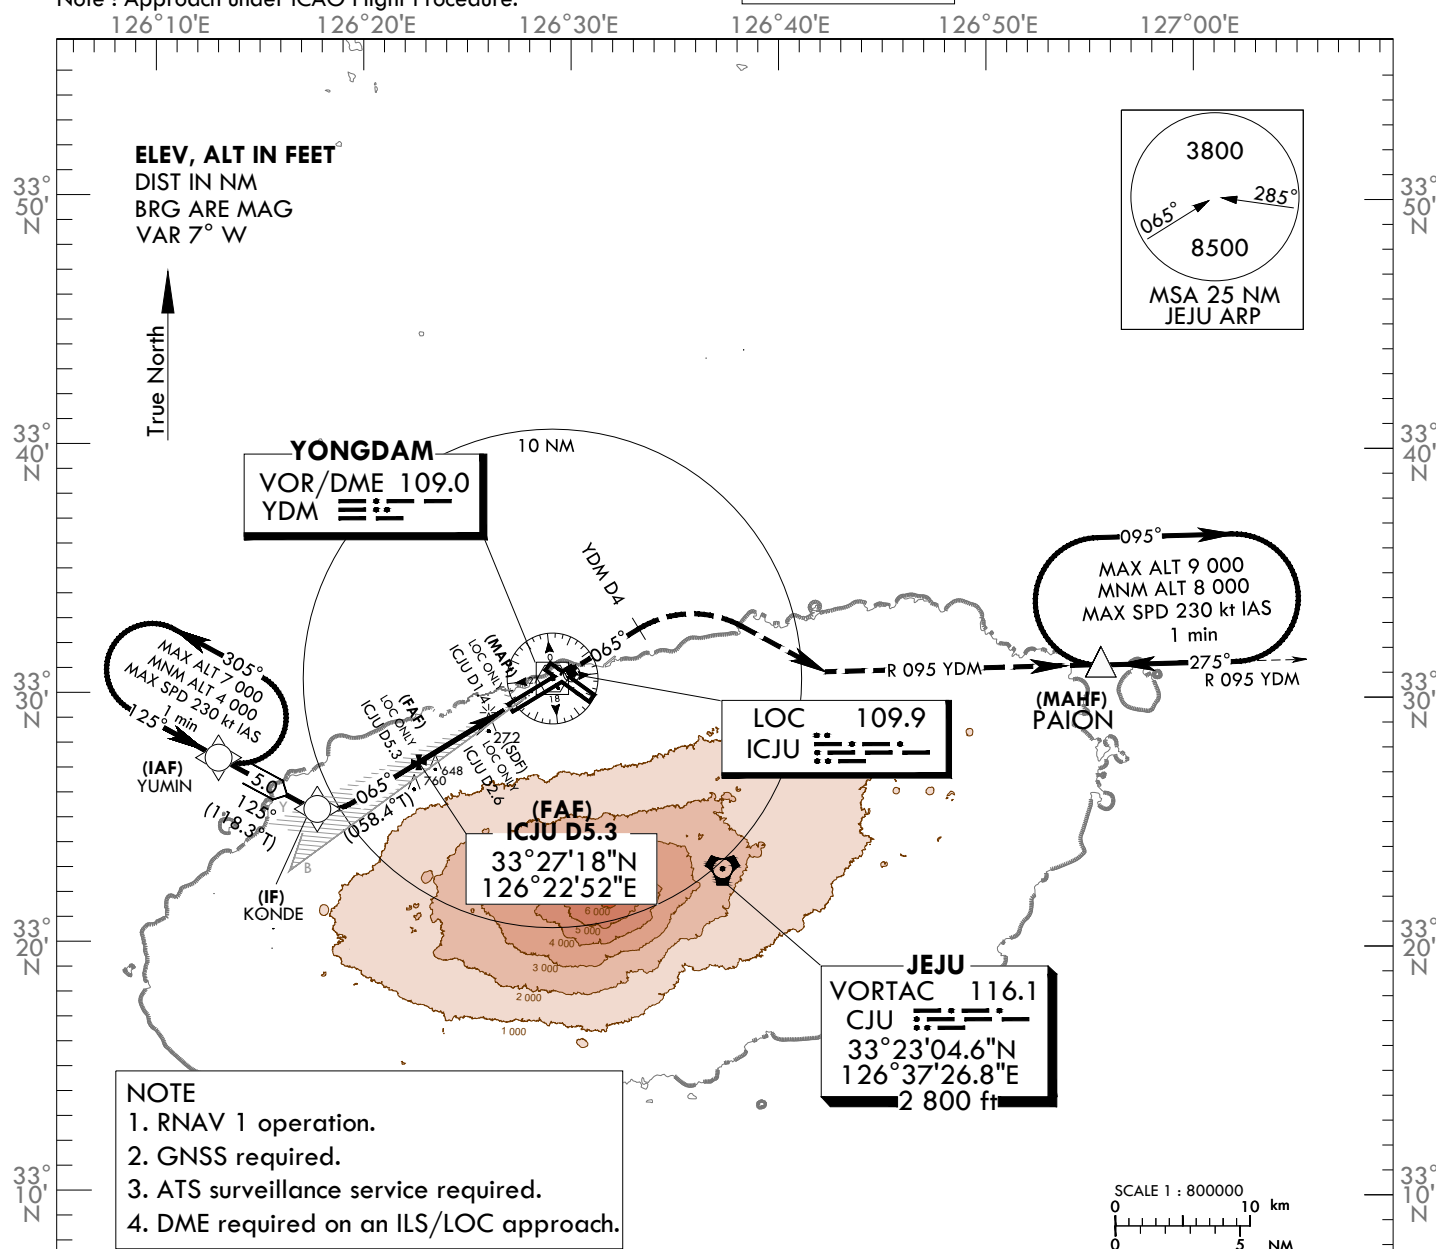

RECOMMENDED PROFILE(LOC ONLY)

DME ICJU

54321.4

1 690
(1 603)

1 367
(1 280)

1 044
(957)

721
(634)

530
(443)

Final Approach Gradient 5.32%, 323 ft/NM

ALT(HGT)

1 690
(1 603)

1 367
(1 280)

1 044
(957)

721
(634)

530
(443)

IAF
YUMIN

IF
KONDE

FAF
(LOC ONLY)
ICJU D5.3

SDF
(LOC ONLY)
ICJU D2.6

MAPt
(LOC ONLY)
ICJU D1.4

VOR/DME
YDM

DME
ICJU

LOC

RA 99°

YDM D4

PAION

095 YDM

4 000
(3 913)

2 900
(2 813)

1 800
(1 713)

910
(823)

GP 3.0°

THR ELEV 87

ILS RDH 50

065°

065°

065°

TRANSITION ALT 14 000

TRANSITION LVL FL 140

Climb straight ahead until YDM D4 then turn RIGHT turn to intercept R 095 YDM to PAION and Hold at 8 000 ft.

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

JEJU/Intl(RKPC)
ILS Z or LOC Z RWY 07
CAT II

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 07 from YUMIN (IAF)		
Fix/point	Coordinates	
YUMIN (IAF)	33°27'25.7"N	126°13'15.5"E
KONDE (IF)	33°25'03.0"N	126°18'31.0"E
D5.3 ICJU (FAP) - BRG 65.21°/5.34 NM ICJU	33°27'17.6"N	126°22'51.8"E
D2.6 ICJU (SDF LOC only) - BRG 65.21°/2.60 NM ICJU	33°28'43.8"N	126°25'39.3"E
D1.4 ICJU (MAPt LOC only) - BRG 65.21°/1.40 NM ICJU	33°29'21.6"N	126°26'52.7"E
THR RWY 07	33°29'59.57"N	126°28'06.50"E
DME ICJU	33°30'09.0"N	126°28'15.7"E
YDM VOR/DME	33°30'41.3"N	126°29'15.3"E
D4 YDM - BRG 65.21°/4.00 NM YDM	33°32'42.4"N	126°33'23.4"E
PAION - BRG 95.00°/22.00 NM YDM	33°31'18.0"N	126°55'34.0"E


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV **87 ft**

JEJU APP 121.2
124.05
JEJU TWR 118.55
118.2

JEJU/Jeju Intl(RKPC)
ILS Y or LOC Y RWY 07
CAT II

Note : Approach under ICAO Flight Procedure.

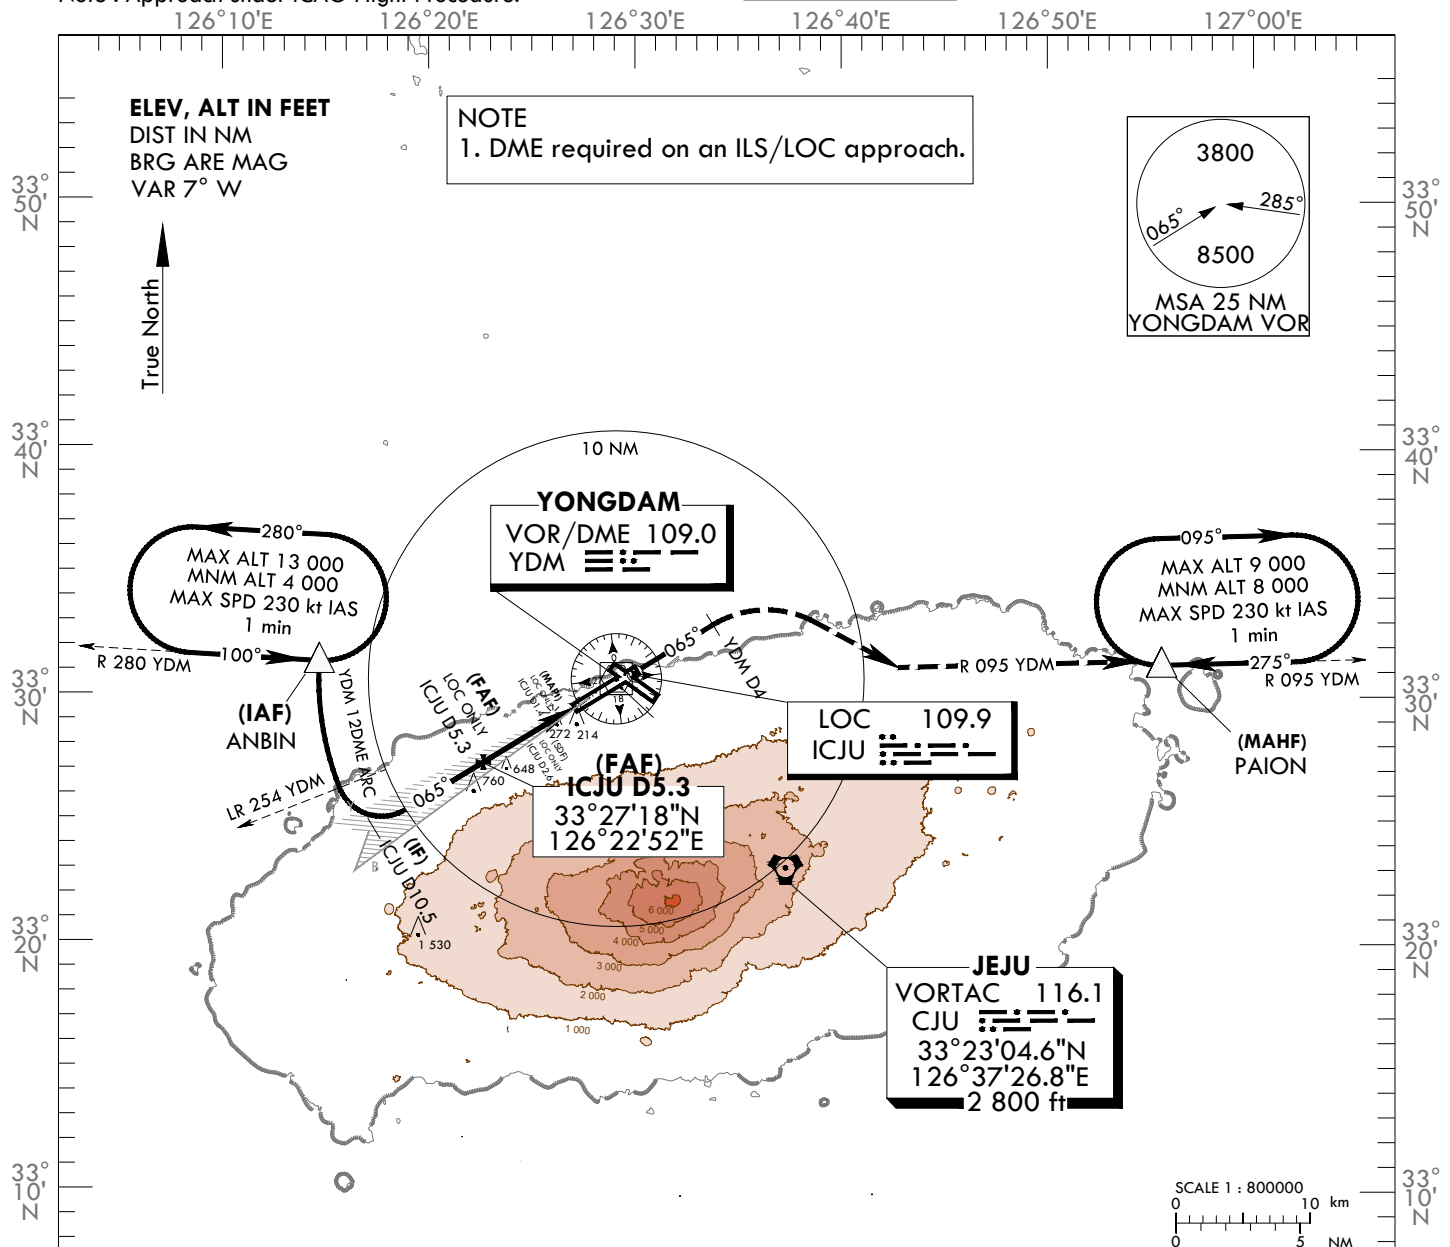

RECOMMENDED PROFILE(LOC ONLY)	DME ICJU	5	4	3	2	1.4
Final Approach Gradient 5.32%, 323 ft/NM	ALT(HGT)	1 690 (1 603)	1 367 (1 280)	1 044 (957)	721 (634)	530 (443)

MISSED APPROACH

Climb straight ahead until YDM D4 then RIGHT turn to intercept R 095 YDM to PAION and Hold at 8 000 ft.

NOTE
1. Missed approach turn limited to maximum of 230 kt IAS.

CATEGORY		DA(DH)/MDA(MDH)	A	B	C	D	DL
STA	CAT-1	FULL	287	RVR 550 m, VIS 750 m			
		ALS INOP	(200)	1 200 m			
	LOC	FULL	530	1 600 m			
		ALS INOP	(443)	2 300 m			
	CAT-II		187(100)	300 m		300 m ¹⁾ /350 m	

	Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955
1) For CAT D/DL aeroplane conducting an autoland.						
* Timing Not authorized for defining MAPt.						
* Circling Not authorized.						

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 7/21
Effective : 1600UTC 14 JUL 2021

JEJU/Intl(RKPC)
ILS Y or LOC Y RWY 07
CAT II

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 07 from ANBIN (IAF)		
Fix/point		Coordinates
ANBIN (IAF)	- 12 DME ARC /12.00 NM YDM	33°31'21.5"N 126°14'55.3"E
D10.5 ICJU (IF)	- BRG 65.21°/10.50 NM ICJU	33°24'35.0"N 126°17'36.8"E
D5.3 ICJU (FAP)	- BRG 65.21°/5.34 NM ICJU	33°27'17.6"N 126°22'51.8"E
D2.6 ICJU (SDF LOC only)	- BRG 65.21°/2.60 NM ICJU	33°28'43.8"N 126°25'39.3"E
D1.4 ICJU (MAPt LOC only)	- BRG 65.21°/1.40 NM ICJU	33°29'21.6"N 126°26'52.7"E
THR RWY 07		33°29'59.57"N 126°28'06.50"E
DME ICJU		33°30'09.0"N 126°28'15.7"E
YDM VOR/DME		33°30'41.3"N 126°29'15.3"E
D4 YDM	- BRG 65.21°/4.00 NM YDM	33°32'42.4"N 126°33'23.4"E
PAION	- BRG 95.00°/22.00 NM YDM	33°31'18.0"N 126°55'34.0"E

**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV 87 ft

JEJU APP 121.2
JEJU TWR 124.05
118.55
118.2


JEJU/Jeju Intl(RKPC)
RNP RWY 07

Note : Approach under ICAO Flight Procedure.

126°30'E

126°50'E

127°00'E

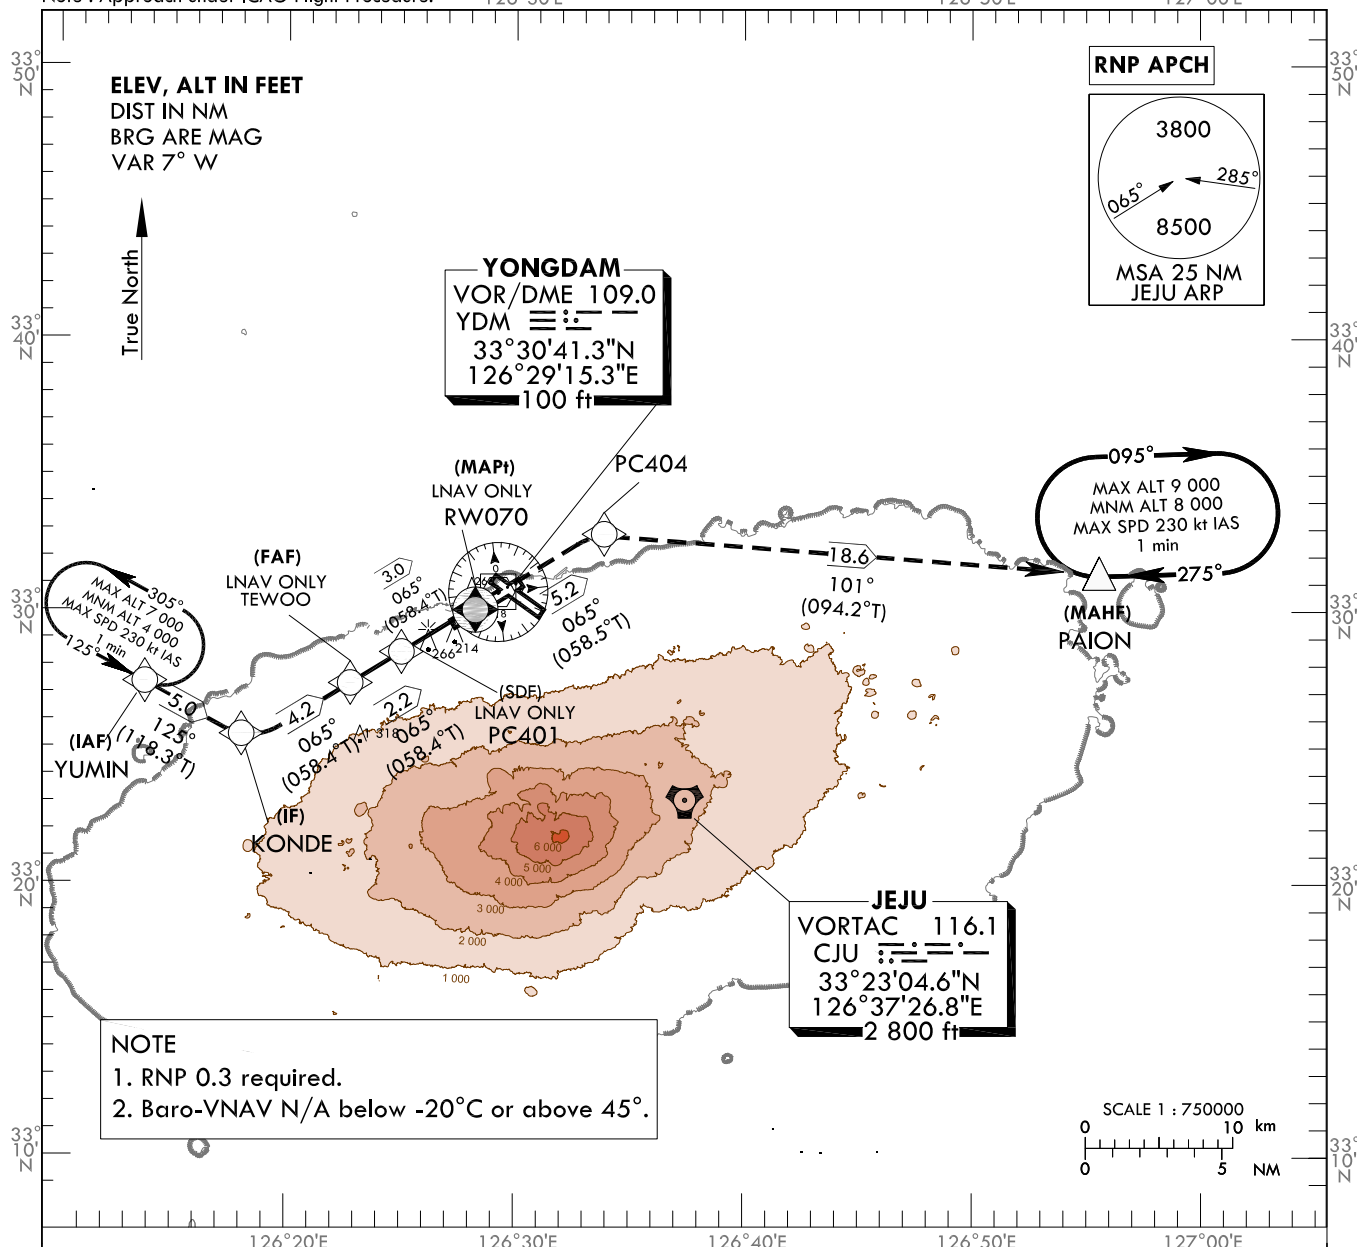

CATEGORY			DA(H)/MDA(H)	A	B	C	D	Knots					
STA	LNAV/VNAV	FULL	500 (413)		1 200 m			Rate of descent V/V fpm	60	90	120	150	180
		ALS INOP			1 900 m				318	478	637	796	955
	LNAV	FULL	540 (453)		1 400 m			* Timing Not authorized for defining MAPt. * Circling Not authorized.					
		ALS INOP			2 100 m								

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 07

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	YUMIN	-	-	-	-	+4 000	-	33°27'25.7"N 126°13'15.5"E	-	RNP APCH	IAF
002	TF	KONDE	-	125(118.3)	5.0	-	+2 900	-	33°25'03.0"N 126°18'31.0"E	-	RNP APCH	IF
003	TF	TEWOO	-	065(058.4)	4.2	-	+1 800	-	33°27'15.3"N 126°22'47.5"E	-	RNP APCH	FAF
004	TF	PC401	-	065(058.4)	2.2	-	+1 000	-	33°28'24.5"N 126°25'01.8"E	-	RNP APCH	SDF
005	TF	RW070	Y	065(058.4)	3.0	-	+540	-	33°29'59.6"N 126°28'06.5"E	-3.00/50	RNP APCH	MAPt
006	TF	PC404	-	065(058.5)	5.2	-	-	-	33°32'42.3"N 126°33'23.4"E	-	RNP APCH	-
007	TF	PAION	Y	101(094.2)	18.6	-	-	-	33°31'18.0"N 126°55'34.0"E	-	RNP APCH	-
008	HM	PAION	Y	275(268.2)	-	R	-9 000 +8 000	-230	33°31'18.0"N 126°55'34.0"E	-	RNP APCH	1 min (Outbound timing)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNP RWY 07	HM	YUMIN	Y	125(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV 87 ft

JEJU APP 121.2
124.05
JEJU TWR 118.55
118.2

JEJU/Jeju Intl(RKPC)
VOR RWY 07

Note : Approach under ICAO Flight Procedure.

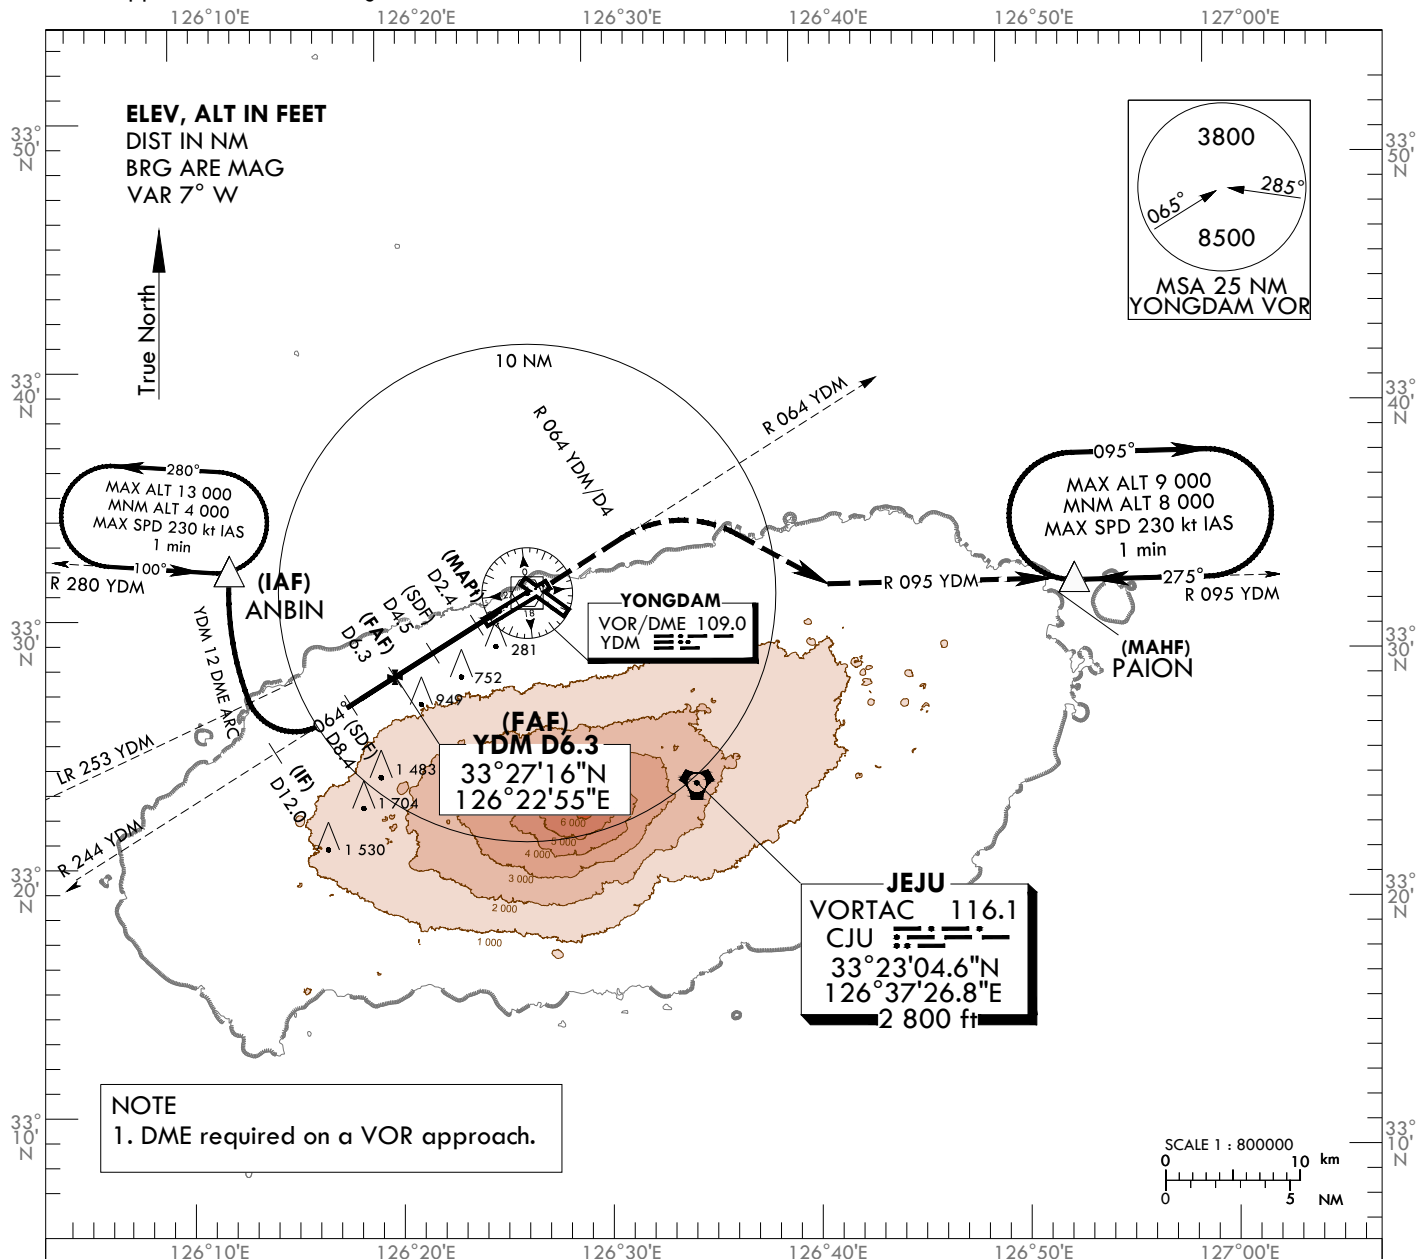


RECOMMENDED PROFILE	DME YDM	6	5	4	3.4
Final Approach Gradient 5.3%, 325 ft/NM	ALT(HGT)	1 702 (1 615)	1 377 (1 290)	1 052 (965)	860 (773)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb on R 064 YDM until 4 DME, then Right turn to intercept R 095 YDM to PAION and Hold at 8 000 ft.

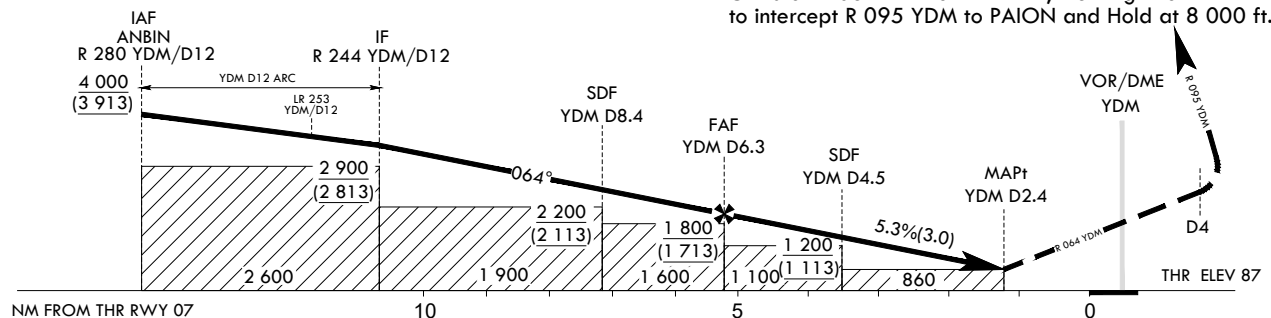

CATEGORY		MDA/(MDH)	A	B	C	D
STA	FULL	860 (773)	2 900 m			
	ALS INOP		3 600 m			

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

JEJU/Intl(RKPC)

VOR RWY 07

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 07 from ANBIN (IAF)		
Fix/point	Coordinates	
ANBIN (IAF) - 12 DME ARC /12.00 NM YDM	33°31'21.5"N	126°14'55.3"E
D12.0 YDM (IF) - BRG 63.89°/12.00 NM YDM	33°24'10.5"N	126°17'12.1"E
D8.4 YDM (SDF) - BRG 63.89°/8.40 NM YDM	33°26'07.9"N	126°20'48.9"E
D6.3 YDM (FAF) - BRG 63.89°/6.30 NM YDM	33°27'16.3"N	126°22'55.4"E
D4.5 YDM (SDF) - BRG 63.89°/4.50 NM YDM	33°28'14.9"N	126°24'43.9"E
D2.4 YDM (MAPt) - BRG 63.89°/2.40 NM YDM	33°29'23.3"N	126°26'50.6"E
THR RWY 07	33°29'59.57"N	126°28'06.50"E
YDM VOR/DME	33°30'41.3"N	126°29'15.3"E
D4 YDM - BRG 64.00°/4.00 NM YDM	33°32'51.3"N	126°33'16.9"E
PAION - BRG 95.00°/22.00 NM YDM	33°31'18.0"N	126°55'34.0"E


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV **76 ft**

JEJU APP 121.2
124.05
JEJU TWR 118.55
118.2

JEJU/Jeju Intl(RKPC)
ILS Z or LOC Z RWY 25

Note : Approach under ICAO Flight Procedure.

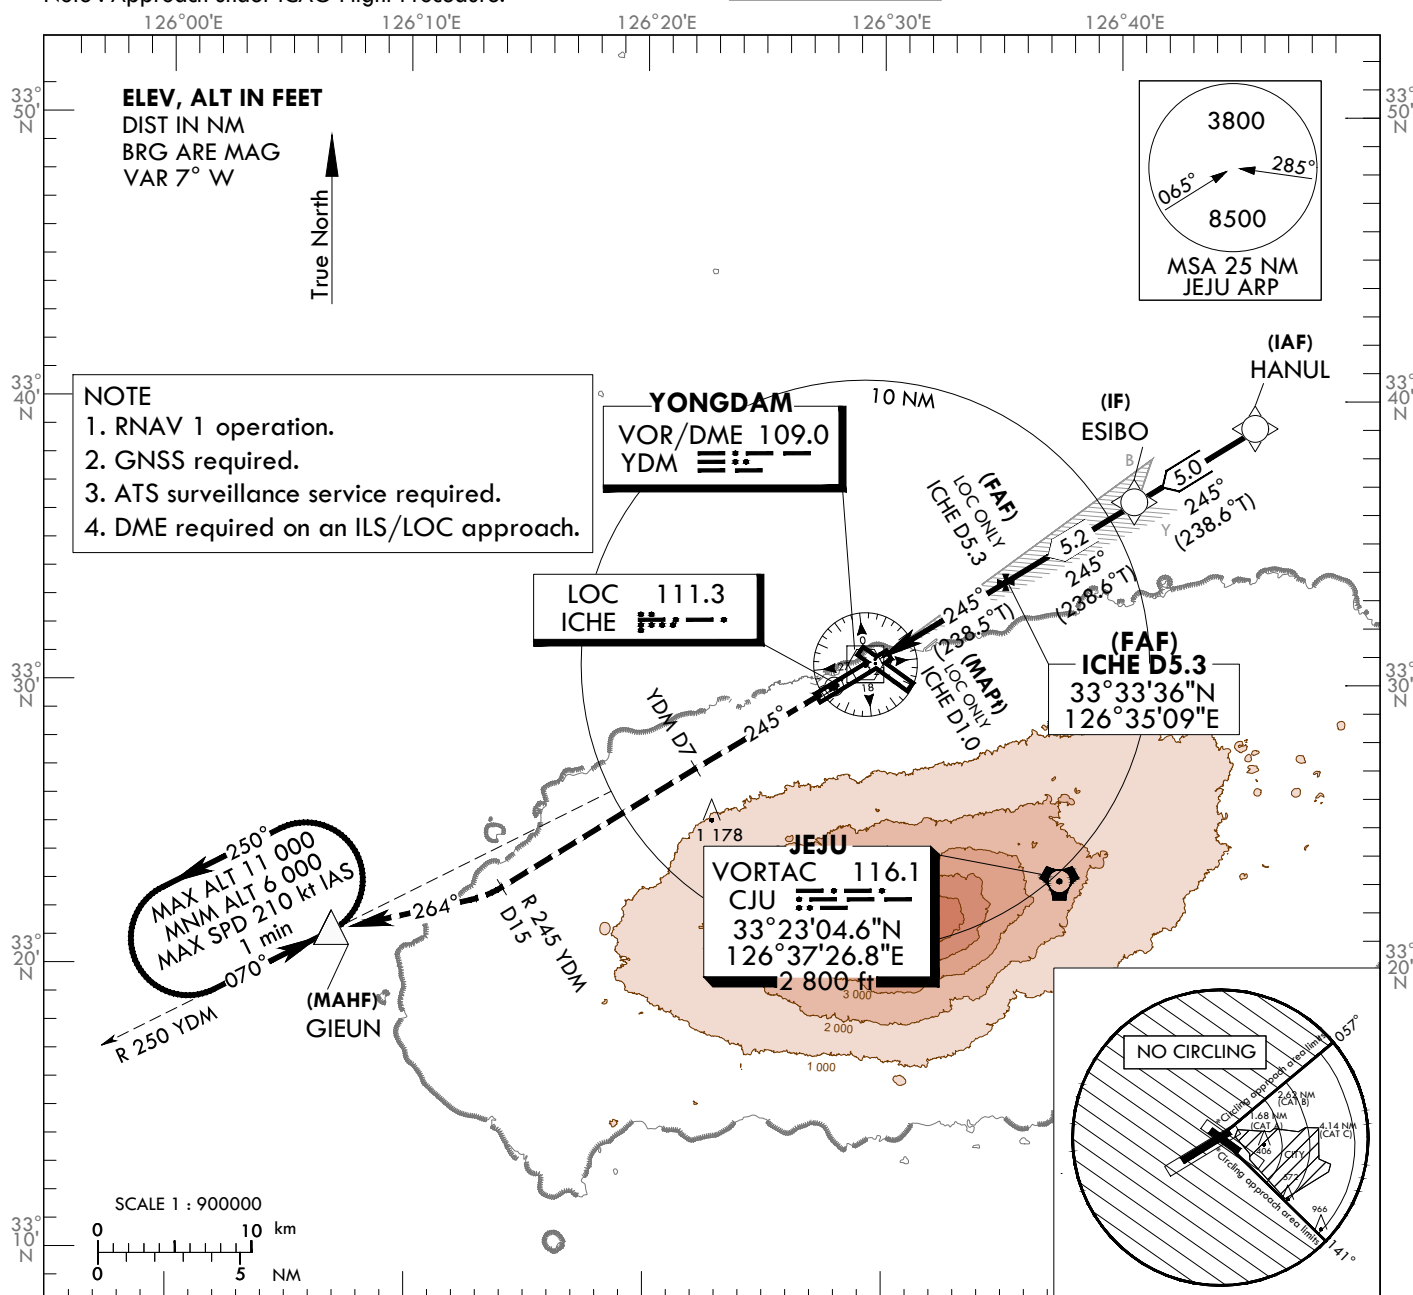


RECOMMENDED PROFILE(LOC ONLY)	DME ICHE	5	4	3	2	1.0
Final Approach Gradient 5.32%, 323 ft/NM	ALT(HGT)	1 691 (1 615)	1 368 (1 292)	1 045 (969)	722 (646)	400 (324)

MISSED APPROACH

Climb straight ahead until YDM D7 to intercept R 245 YDM/D15, turn RIGHT heading 264 to GIEUN and Hold at 6 000 ft.

NOTE

1. Missed approach turn limited to maximum of 210 kt IAS.

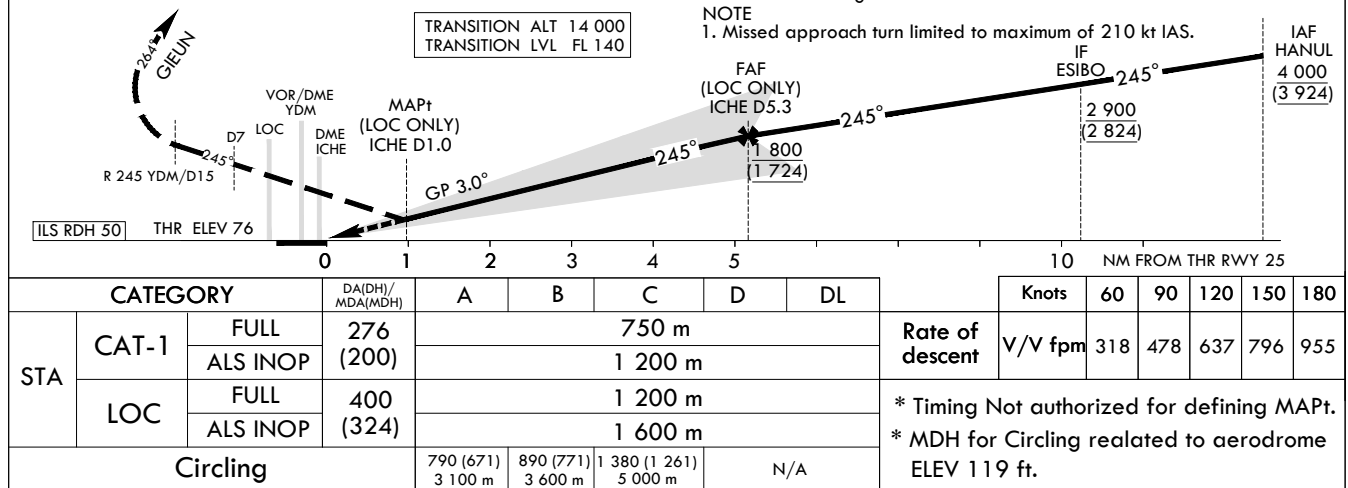

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 25 from HANUL (IAF)		
Fix/point	Coordinates	
HANUL (IAF)	33°38'58.6"N	126°45'38.8"E
ESIBO (IF) - BRG 245.35°/5.00 NM	33°36'21.9"N	126°40'32.2"E
D5.3 ICHE (FAP) - BRG 245.23°/5.34 NM ICHE	33°33'36.4"N	126°35'08.7"E
D1.0 ICHE (MAPt LOC only) - BRG 245.23°/1.00 NM ICHE	33°31'20.0"N	126°30'43.0"E
THR RWY 25	33°30'53.56"N	126°29'51.51"E
DME ICHE	33°30'51.4"N	126°29'39.1"E
YDM VOR/DME	33°30'41.3"N	126°29'15.3"E
D7.0 YDM - BRG 245.23°/7.00 NM YDM	33°26'59.7"N	126°22'08.6"E
D15.0 YDM - BRG 244.94°/15.00 NM YDM	33°22'45.9"N	126°14'01.5"E
GIEUN - BRG 263.84°/21.00 NM YDM	33°21'11.1"N	126°06'52.2"E


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV 76 ft

JEJU APP 121.2
124.05
JEJU TWR 118.55
118.2

JEJU/Jeju Intl(RKPC)
ILS Y or LOC Y RWY 25

Note : Approach under ICAO Flight Procedure.

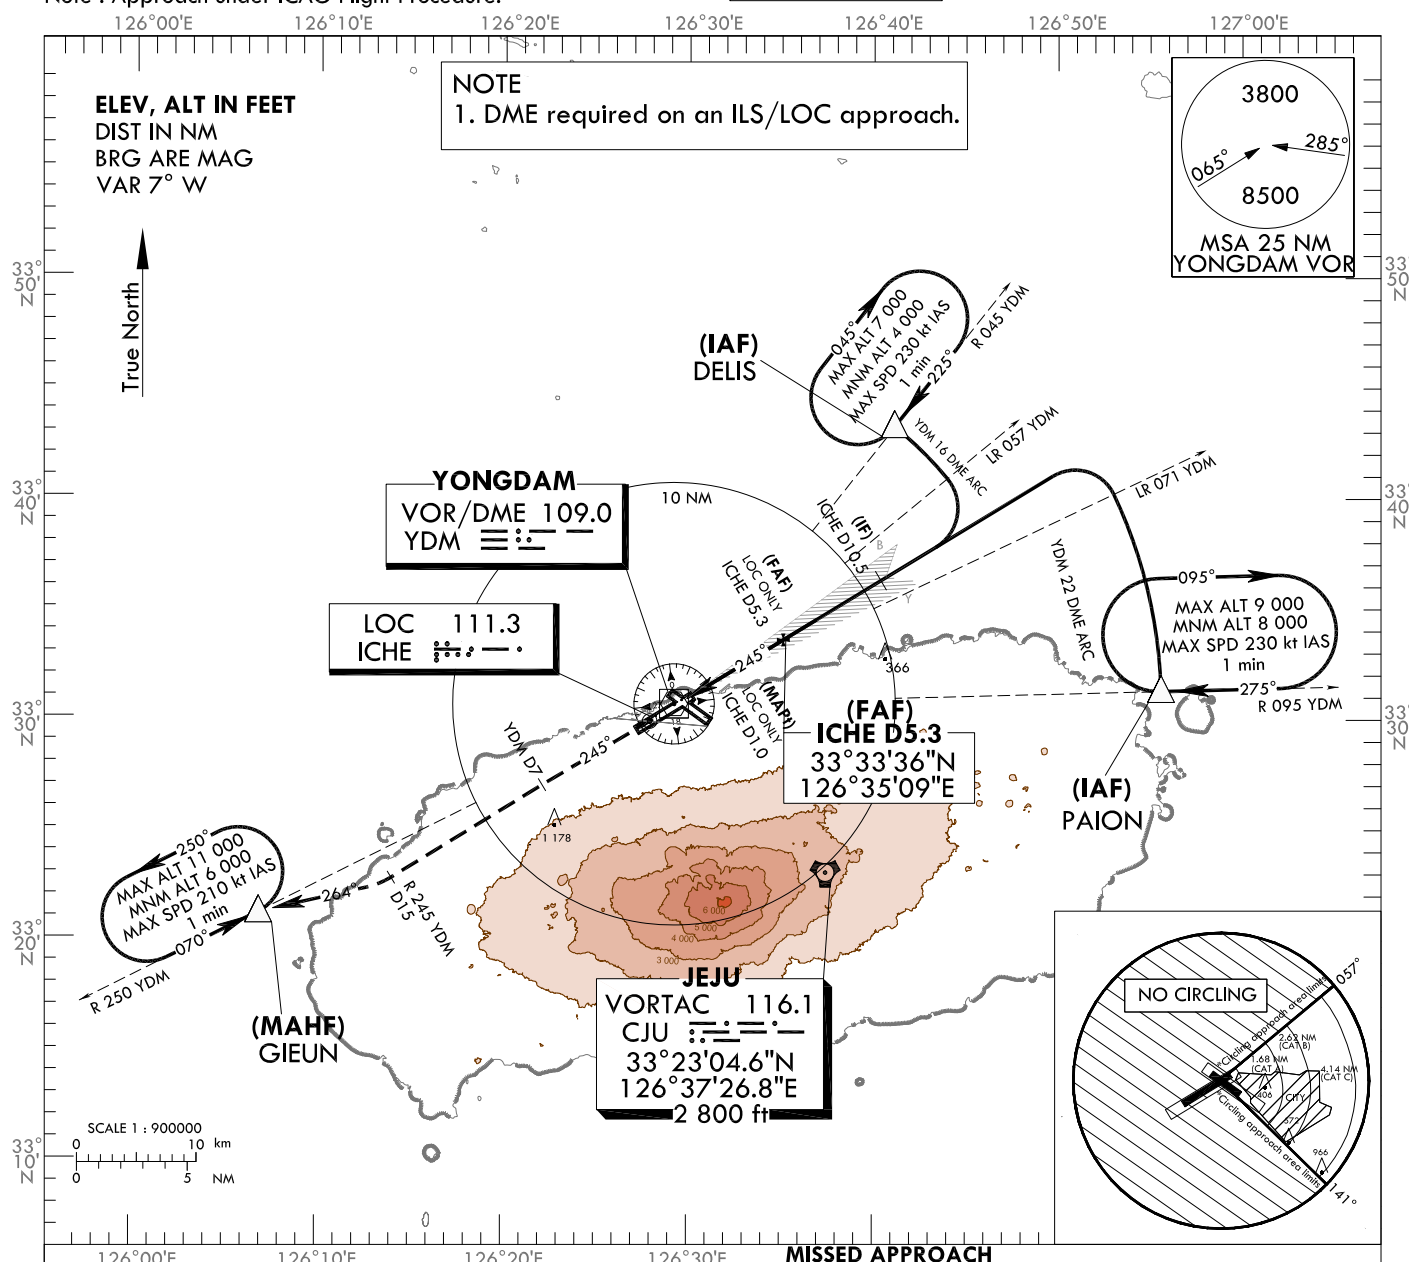


MISSED APPROACH

Climb straight ahead until YDM D7 to intercept R 245 YDM/D15
turn RIGHT HDG 264° to GIEUN and Hold at 6 000 ft.

NOTE

1. Missed approach turn limited to maximum of 210 kt IAS.

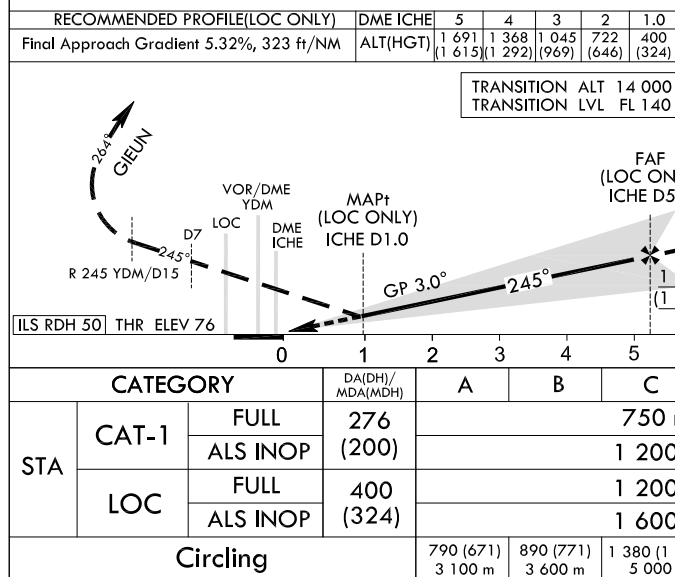

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

AERONAUTICAL DATA TABULATION

ILS/LOC Approach to RWY 25 from DELIS (IAF) or PAION (IAF)		
Fix/point		Coordinates
DELIS (IAF)	- 16 DME ARC /16.00 NM YDM	33°43'16.2"N 126°41'08.0"E
PAION (IAF)	- 22 DME ARC /22.00 NM YDM	33°31'18.0"N 126°55'34.0"E
D10.5 ICHE (IF)	- BRG 245.35°/10.50 NM ICHE	33°36'18.2"N 126°40'24.9"E
D5.3 ICHE (FAP)	- BRG 245.23°/5.34 NM ICHE	33°33'36.4"N 126°35'08.7"E
D1.0 ICHE (MAPt LOC only)	- BRG 245.23°/1.00 NM ICHE	33°31'20.0"N 126°30'43.0"E
THR RWY 25		33°30'53.56"N 126°29'51.51"E
DME ICHE		33°30'51.4"N 126°29'39.1"E
YDM VOR/DME		33°30'41.3"N 126°29'15.3"E
D7.0 YDM	- BRG 245.23°/7.00 NM YDM	33°26'59.7"N 126°22'08.6"E
D15.0 YDM	- BRG 244.94°/15.00 NM YDM	33°22'45.9"N 126°14'01.5"E
GIEUN	- BRG 263.84°/21.00 NM YDM	33°21'11.1"N 126°06'52.2"E


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV 76 ft

JEJU APP 121.2
124.05
JEJU TWR 118.55
118.2


JEJU/Jeju Intl(RKPC)
RNP RWY 25

Note : Approach under ICAO Flight Procedure.

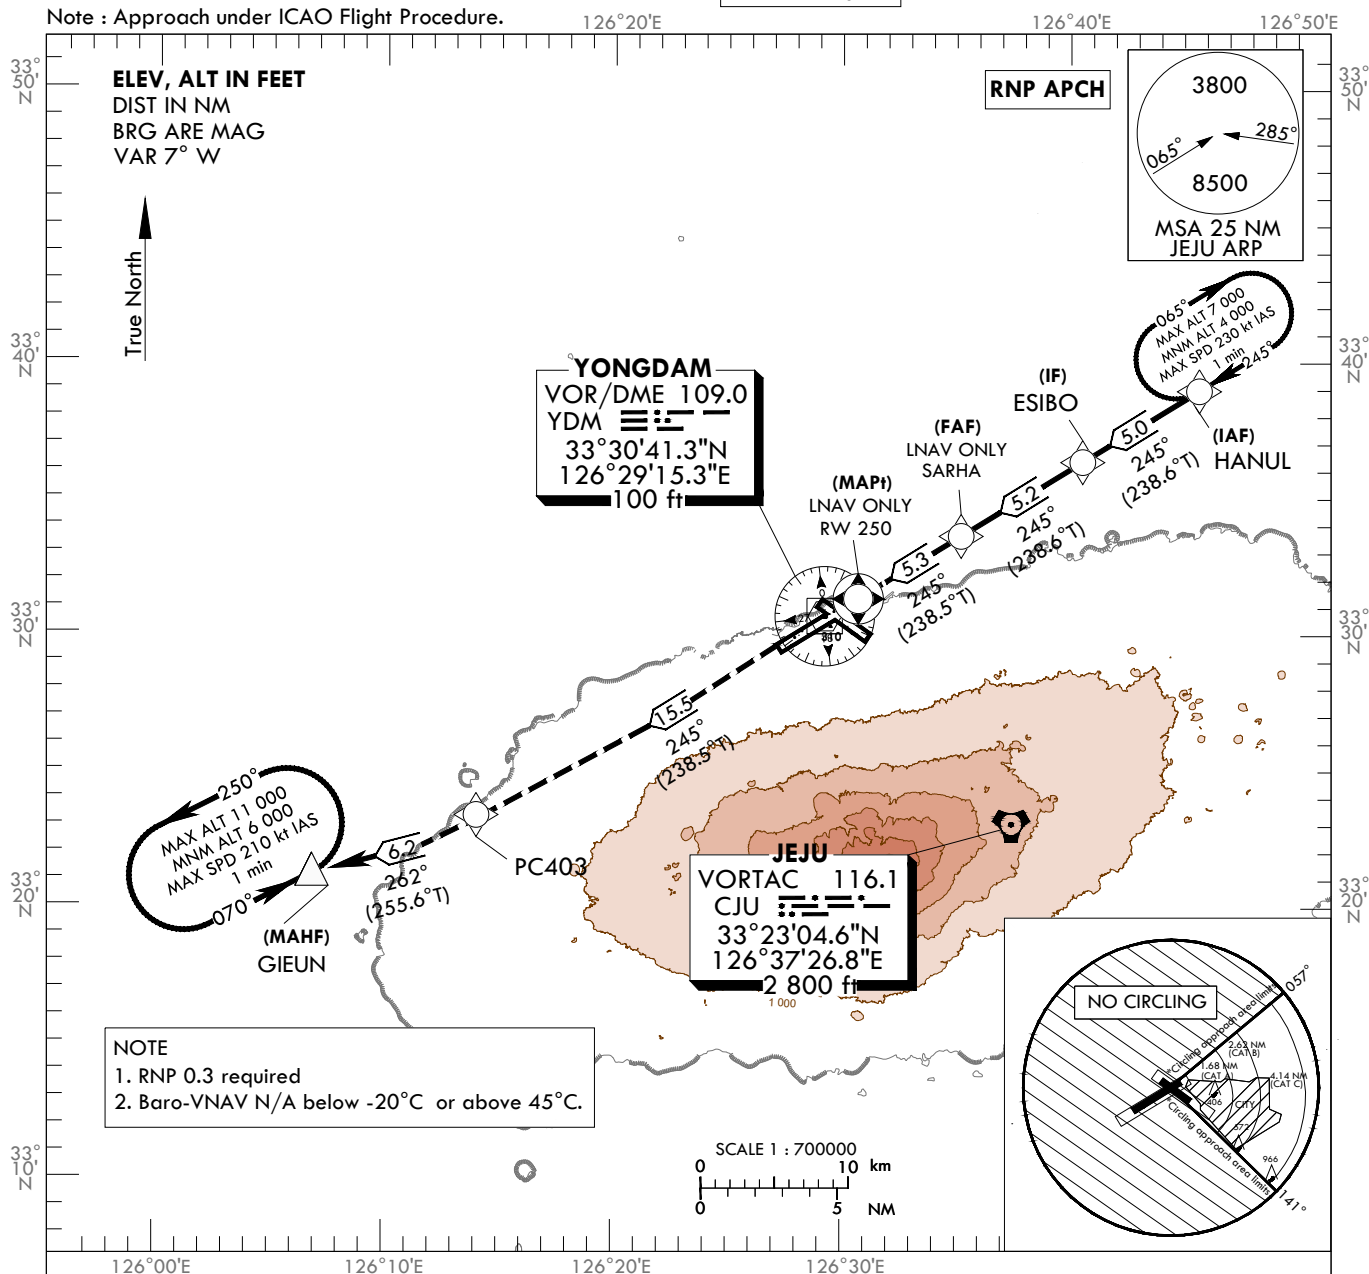

MISSED APPROACH

Climb to 6 000 ft on track of 245° to PC403, then RIGHT turn on track of 262° to GIEUN.

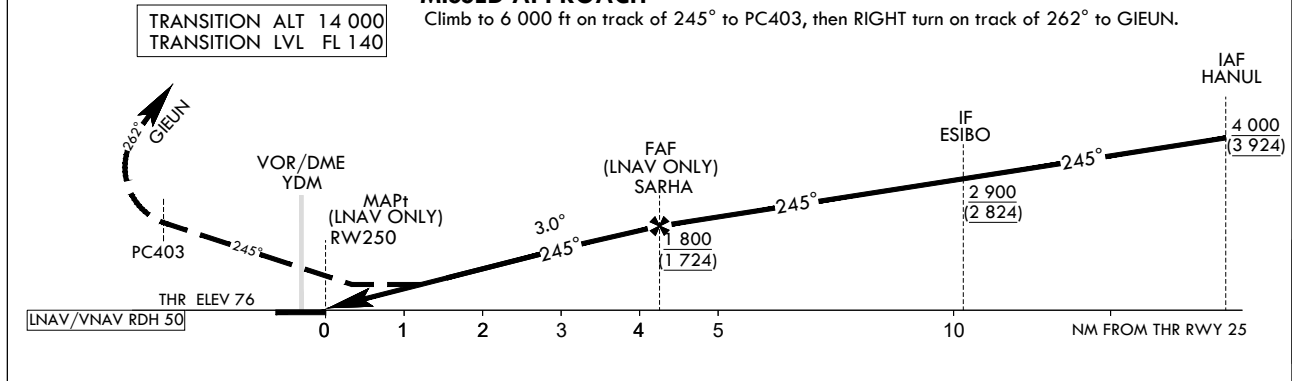

CATEGORY			DA(H)/MDA(H)	A	B	C	D		Knots	60	90	120	150	180						
STA	LNAV/VNAV	FULL	490	1 500 m				Rate of descent	V/V fpm	319	478	637	797	956						
		ALS INOP	(414)	1 900 m																
	LNAV	FULL	520	1 700 m			* Timing Not authorized for defining MAPt. * MDH for Circling related to aerodrome ELEV 119 ft.													
		ALS INOP	(444)	2 100 m																
Circling				790 (671) 3 100 m	890 (771) 3 600 m	1 380 (1 261) 5 000 m	N/A													

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 25

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	HANUL	-	-	-	-	+4 000	-	33°38'58.6"N 126°45'38.8"E	-	RNP APCH	IAF
002	TF	ESIBO	-	245(238.6)	5.0	-	+2 900	-	33°36'21.9"N 126°40'32.2"E	-	RNP APCH	IF
003	TF	SARHA	-	245(238.6)	5.2	-	+1 800	-	33°33'38.6"N 126°35'13.1"E	-	RNP APCH	FAF
004	TF	RW250	Y	245(238.5)	5.3	-	+520	-	33°30'53.6"N 126°29'51.5"E	-3.00/50	RNP APCH	MAPt
005	TF	PC403	-	245(238.5)	15.5	-	-	-	33°22'44.4"N 126°14'03.0"E	-	RNP APCH	-
006	TF	GIEUN	Y	262(255.6)	6.2	-	-	-	33°21'11.1"N 126°06'52.2"E	-	RNP APCH	-
007	HM	GIEUN	Y	070(063.2)	-	L	-11 000 +6 000	-210	33°21'11.1"N 126°06'52.2"E	-	RNP APCH	1 min (Outbound timing)

HOLDING PROCEDURE

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	TIME (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNP RWY 25	HM	HANUL	Y	245(238.6)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV 76 ft

JEJU APP 121.2
124.05
JEJU TWR 118.55
118.2

JEJU/Jeju Intl(RKPC)
VOR RWY 25

Note : Approach under ICAO Flight Procedure.

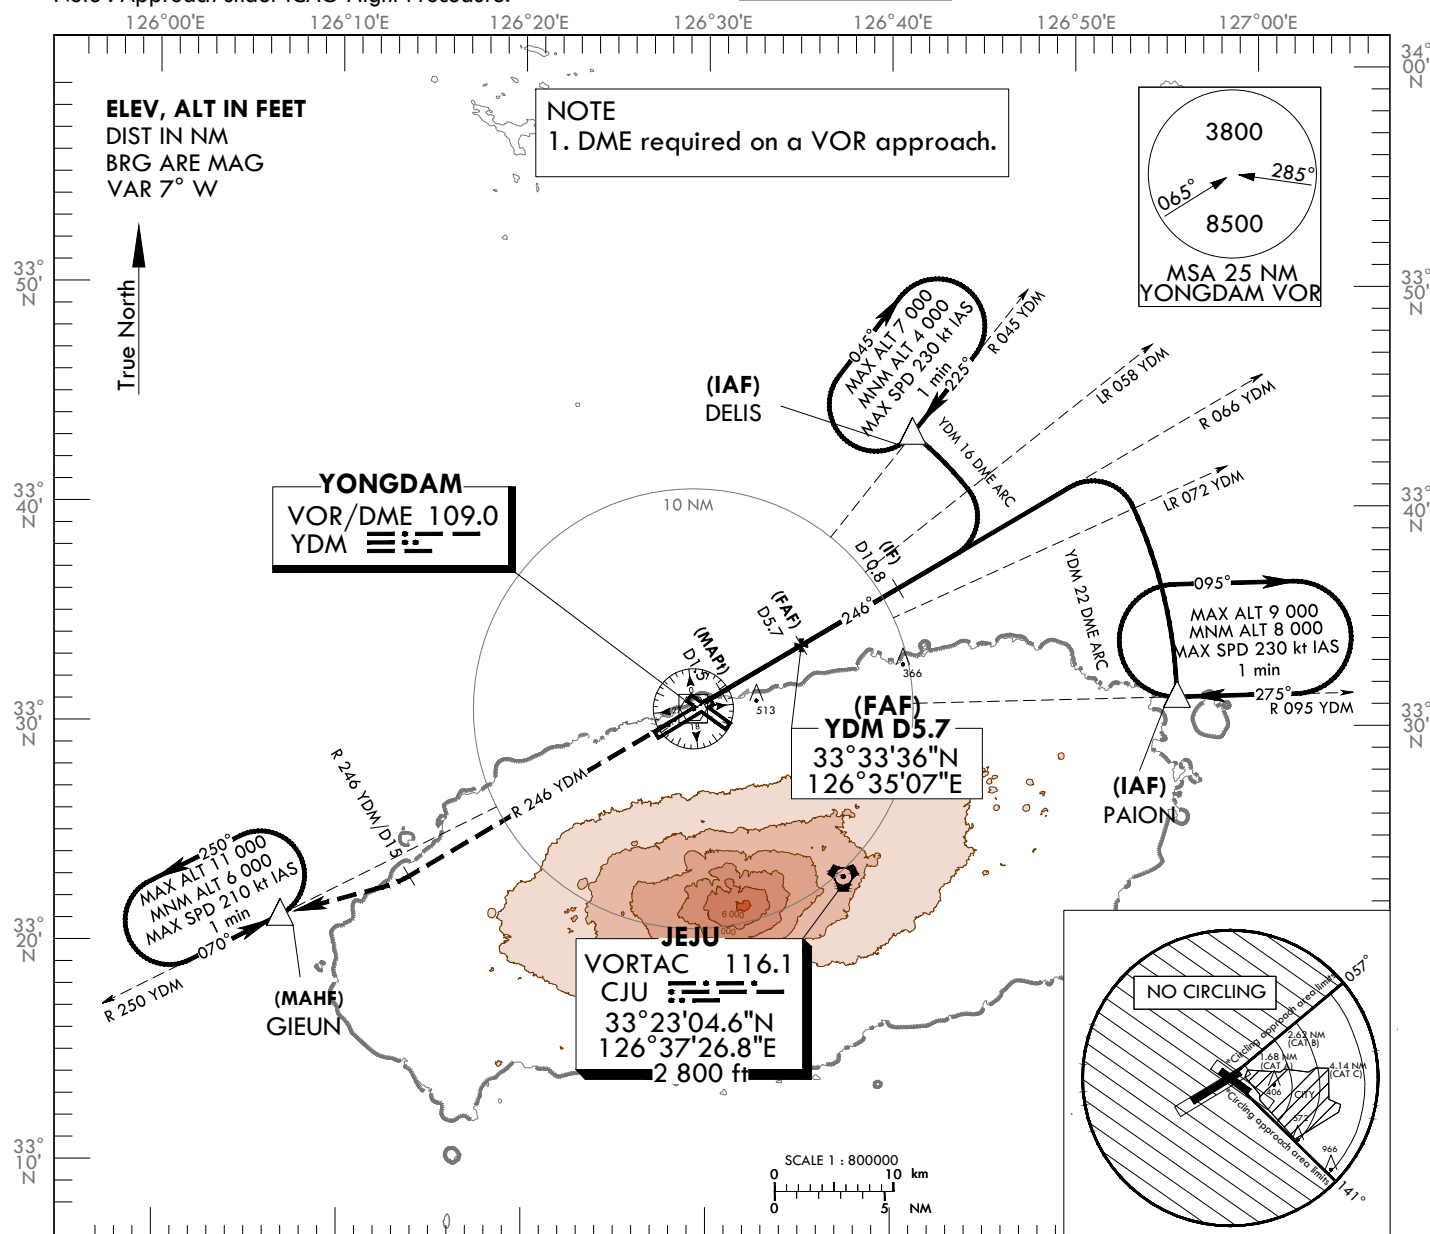

CATEGORY		MDA(MDH)	A	B	C	D
STA	FULL	610 (534)	2 000 m			
	ALS INOP		2 400 m			
Circling			790 (671) 3 100 m	890 (771) 3 600 m	1 380 (1 261) 5 000 m	N/A

* Timing Not authorized for defining MAPt.
* MDH for Circling related to aerodrome ELEV 119 ft.

Change : Information of TWR frequency(118.125 MHz → 118.55 MHz).

JEJU/Intl(RKPC)

VOR RWY 25

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 25 from DELIS (IAF) or PAION (IAF)		
Fix/point		Coordinates
DELIS (IAF)	- 16 DME ARC/16.00 NM YDM	33°43'16.2"N 126°41'08.0"E
PAION (IAF)	- 22 DME ARC/22.00 NM YDM	33°31'18.0"N 126°55'34.0"E
D10.8 YDM (IF)	- BRG 246.10°/10.80 NM YDM	33°36'12.8"N 126°40'22.1"E
D5.7 YDM (FAF)	- BRG 246.10°/5.70 NM YDM	33°33'36.4"N 126°35'07.1"E
D1.5 YDM (MAPt)	- BRG 246.10°/1.50 NM YDM	33°31'27.2"N 126°30'47.4"E
THR RWY 25		33°30'53.56"N 126°29'51.51"E
YDM VOR/DME		33°30'41.3"N 126°29'15.3"E
D15.0 YDM	- BRG 246.00°/15.00 NM YDM	33°22'59.4"N 126°13'51.7"E
GIEUN	- BRG 250.00°/21.00 NM YDM	33°21'11.1"N 126°06'52.2"E