


**STANDARD ARRIVAL CHART
INSTRUMENT(STAR) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON APP 135.4
YEOSU TWR 122.5
240.9

YEOSU/Yeosu (RKJY)
RWY 17
RNAV TEDAN 1D
RNAV GOSBO 1D

Note : Arrival under ICAO Flight Procedures.

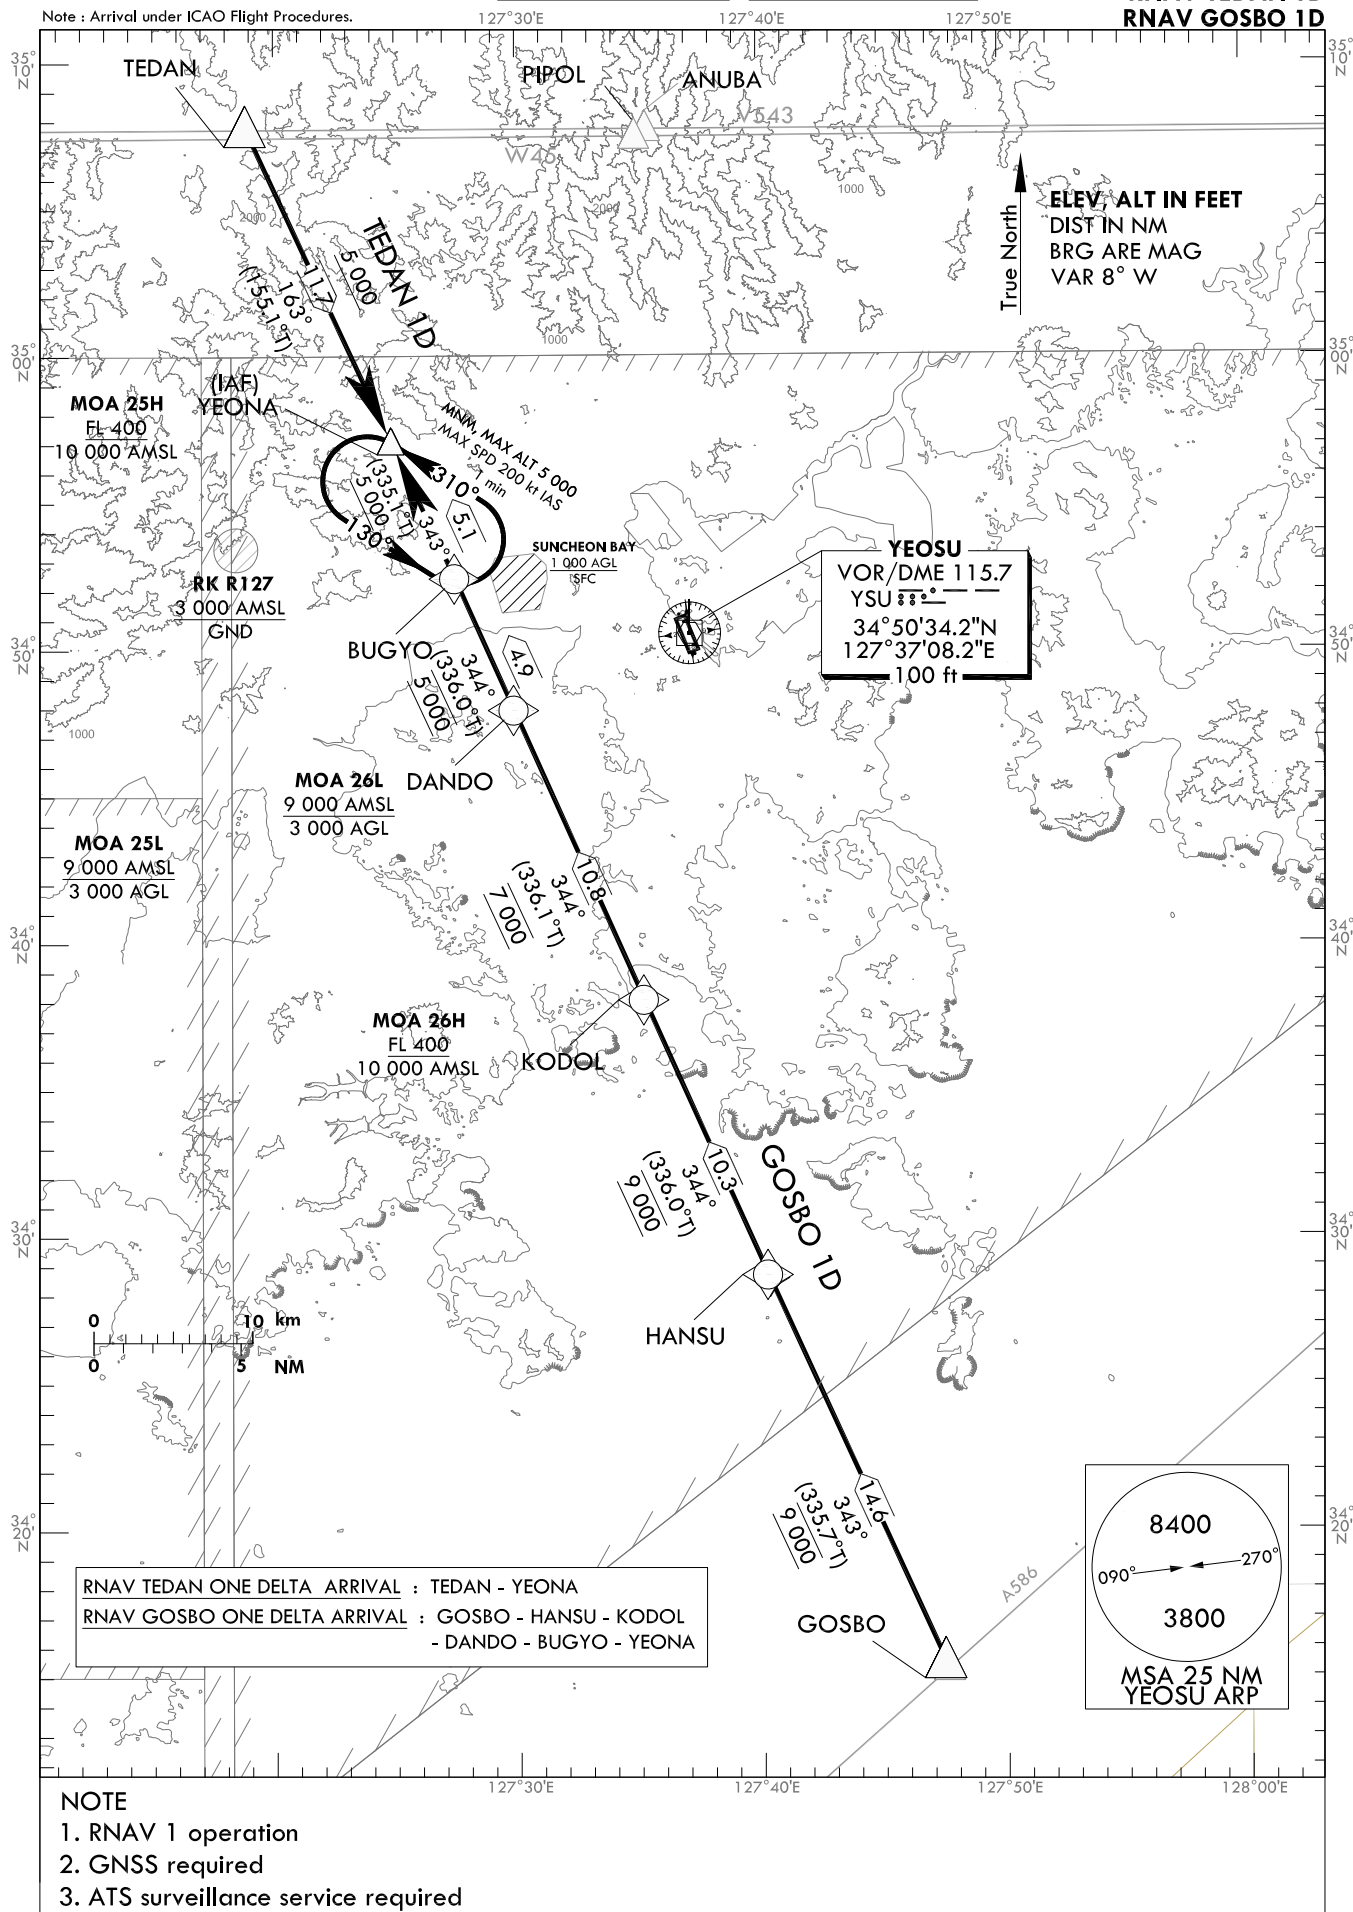

Change : Amended coordinate format.

YEOSU/Yeosu (RKJY)

RWY 17

RNAV TEDAN 1D, RNAV GOSBO 1D

HOLDING PROCEDURE

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV TEDAN 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	TEDAN	-	-	-	-	-	-	35°07'43.8"N 127°18'52.1"E	-	RNAV 1	-
002	TF	YEONA	-	163(155.1)	11.7	-	+5 000	-	34°57'03.8"N 127°24'52.1"E	-	RNAV 1	IAF

RNAV GOSBO 1D

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	GOSBO	-	-	-	-	-	-	34°15'16.8"N 127°47'34.4"E	-	RNAV 1	-
002	TF	HANSU	-	343(335.7)	14.6	-	@9 000	-	34°28'36.0"N 127°40'19.0"E	-	RNAV 1	-
003	TF	KODOL	-	344(336.0)	10.3	-	@9 000	-	34°38'03.0"N 127°35'14.0"E	-	RNAV 1	-
004	TF	DANDO	-	344(336.1)	10.8	-	@7 000	-	34°47'56.0"N 127°29'55.0"E	-	RNAV 1	-
005	TF	BUGYO	-	344(336.0)	4.9	-	@5 000	-	34°52'26.0"N 127°27'29.0"E	-	RNAV 1	-
006	TF	YEONA	-	343(335.1)	5.1	-	+5 000	-	34°57'03.8"N 127°24'52.1"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNAV TEDAN 1D	HM	YEONA	Y	310(302.8)	1	L	@5 000	-200	34°57'03.8"N 127°24'52.1"E	-	RNAV 1	-
RNAV GOSBO 1D	HM	YEONA	Y	310(302.8)	1	L	@5 000	-200	34°57'03.8"N 127°24'52.1"E	-	RNAV 1	-

Change : Amended coordinate format.


**STANDARD ARRIVAL CHART
INSTRUMENT(STAR) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON APP 135.4
YEOSU TWR 122.5
240.9

YEOSU/Yeosu (RKJY)
RWY 35
RNAV TEDAN 3C
RNAV GOSBO 5C

Note : Arrival under ICAO Flight Procedures.

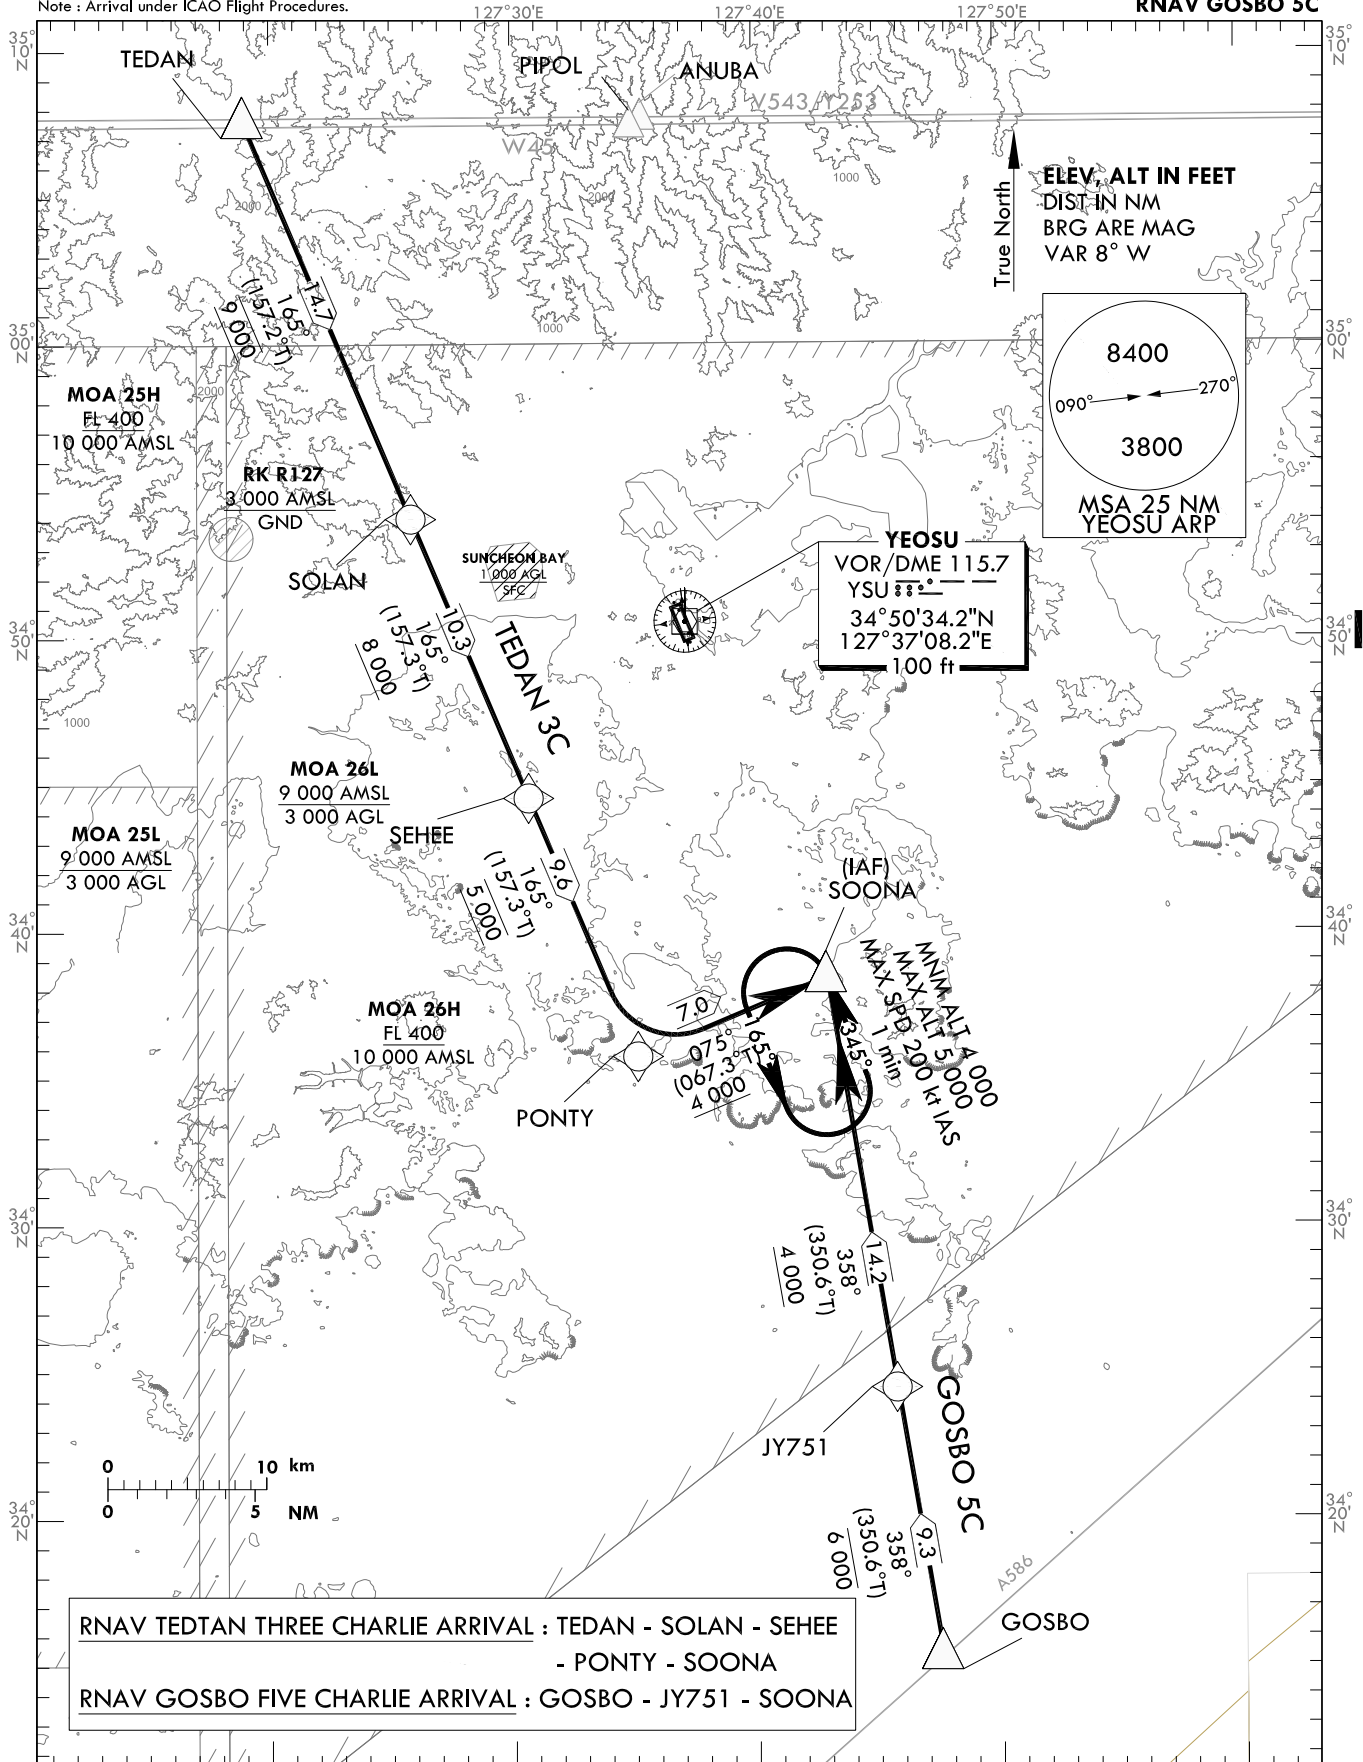

Change : Amended coordinate format.

YEOSU/Yeosu (RKJY)

RWY 35

RNAV TEDAN 3C, RNAV GOSBO 5C

HOLDING PROCEDURE

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV TEDAN 3C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	TEDAN	-	-	-	-	-	-	35°07'43.8"N 127°18'52.1"E	-	RNAV 1	-
002	TF	SOLAN	-	165(157.2)	14.7	-	@9 000	-	34°54'10.0"N 127°25'48.0"E	-	RNAV 1	-
003	TF	SEHEE	-	165(157.3)	10.3	-	+8 000	-	34°44'37.0"N 127°30'39.0"E	-	RNAV 1	-
004	TF	PONTY	-	165(157.3)	9.6	-	@5 000	-	34°35'46.2"N 127°35'07.9"E	-	RNAV 1	-
005	TF	SOONA	-	075(067.3)	7.0	-	+4 000	-	34°38'27.5"N 127°42'56.0"E	-	RNAV 1	IAF

RNAV GOSBO 5C

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	IF	GOSBO	-	-	-	-	-	-	34°15'16.8"N 127°47'34.4"E	-	RNAV 1	-
002	TF	JY751	-	358(350.6)	9.3	-	-6 000	-	34°24'25.6"N 127°45'44.8"E	-	RNAV 1	-
003	TF	SOONA	-	358(350.6)	14.2	-	+4 000	-	34°38'27.5"N 127°42'56.0"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
RNAV TEDAN 3C	HW	SOONA	Y	345(338.5)	1	L	-4000 +5000	-200	34°38'27.5"N 127°42'56.0"E	-	RNAV 1	-
RNAV GOSBO 5C	HW	SOONA	Y	345(338.5)	1	L	-4000 +5000	-200	34°38'27.5"N 127°42'56.0"E	-	RNAV 1	-

Change : Amended coordinate format.